


HIGHGATE

HGLST1

Highgate Touchless Lavatory Faucet

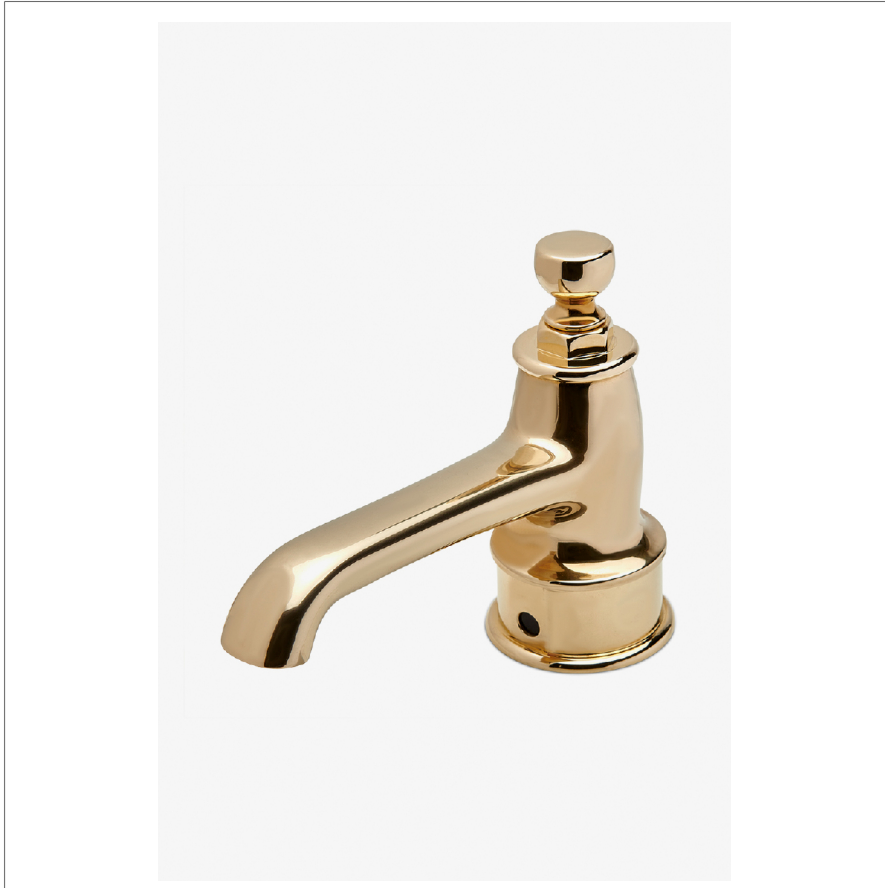

SHOWN IN HIGHGATE TOUCHLESS LAVATORY FAUCET | HGLST1

TECHNICAL DETAILS

Deck Thickness Maximum: 2 3/16"
Deck Thickness Minimum: 3/16"
Fittings Hole Diameter: 1 3/8"
Inlet Connection Size: 1/2"
Inlet Connection Type: Straight Male Threads
Inlet Supply Spread Maximum: 1 1/8"
Inlet Supply Spread Minimum: 1 1/8"
Number Of Holes: One Hole
Primary Material: Brass
Restricted Maximum Flow Rate: 1.2 gpm
Water Pressure Maximum: 85.0 psi
Water Pressure Minimum: 20.0 psi
Water Pressure Recommended: 45.0 psi

INSPIRATION

Our take on old English style: simple, functional shapes, detailed with white porcelain indices and hexagonal accents for a timeless feel.

CODES & STANDARDS

PRODUCT FEATURES

The compact dual-temp mixing valve is installed under the sink, water temperature can be adjusted according to user preference

Dual-temp mixing valve, infrared sensor and battery pack housed in streamlined box for seamless installation

Infrared sensor integrated into the spout base, detection distance: 4-3/4" [120mm]. Background suppression technology ensures detection reliability

Flow is metered and shut-off after 8 seconds achieving a water usage rate of 0.16 gallons per cycle (gpc)

Battery Operated with 6 AA batteries included. Lavatory drain and supply hoses sold separately

CERTIFICATIONS

PRODUCT (NOTES)

HIGHGATE

HGLST1

Highgate Touchless Lavatory Faucet

