

For Commercial and Institutional Applications

Job Name _____
 Job Location _____
 Engineer _____
 Approval _____

Contractor _____
 Approval _____
 Contractor's P.O. No. _____
 Representative _____

**ANKA® A Series
 Pipe Fittings**

Pipe fittings that have a unique patented design that connects to a large range of pipes and hoses due to the tapered design of the nut. Manufactured from high grade glass fiber reinforced nylon, these fittings are strong and lightweight. The fittings suit hose, pumping, irrigation, marine, hydroponics, plumbing, agriculture, landscaping, and industrial applications.

Features

- Non-corrosive, made from extremely durable, high quality materials
- Fittings are re-usable and can be fitted without the use of tools
- Unique Blue Nut; which is very user friendly



Applications

- Hose
- Pumping
- Irrigation
- Marine
- Hydroponics
- Plumbing
- Agriculture
- Industry
- Landscaping

Material


Glass Fiber Reinforced Nylon

Maximum Working Pressure:
 230 psi – 1600 kpa (16 bar) @ 20°C

NOTICE

The information contained herein is not intended to replace the full product installation and safety information available or the experience of a trained product installer. You are required to thoroughly read all installation instructions and product safety information before beginning the installation of this product.

BLUE NUT FOR IDENTIFICATION PIPE SEALS ON RIDGE

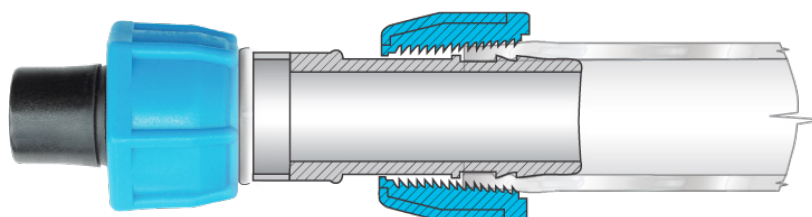

CAPTIVE NUT STAYS ON FITTING

Watts product specifications in U.S. customary units and metric are approximate and are provided for reference only. For precise measurements, please contact Watts Technical Service. Watts reserves the right to change or modify product design, construction, specifications, or materials without prior notice and without incurring any obligation to make such changes and modifications on Watts products previously or subsequently sold.



Models



Elbow

AE12 US	1/2" (15mm)
AE34 US	3/4" (20mm)
AE1 US	1" (25mm)
AE114 US	1 1/4" (32mm)



Straight Coupling

ASC12 US	1/2" (15mm)
ASC34 US	3/4" (20mm)
ASC1 US	1" (25mm)
ASC114 US	1 1/4" (32mm)



Tee

AT12 US	1/2" (15mm)
AT34 US	3/4" (20mm)
AT1 US	1" (25mm)
AT114 US	1 1/4" (32mm)



Female Elbow

AFE12 US	1/2" (15mm)
AFE34 US	3/4" (20mm)
AFE1 US	1" (25mm)
AFE114 US	1 1/4" (32mm)



Reducing Female Elbow

ARFE3412 US	3/4"x1/2" (20x15 mm)
ARFE112 US	1"x1/2" (25x15mm)
ARFE134 US	1"x3/4" (25x20mm)



Female Adaptor

AFA12 US	1/2" (15mm)
AFA34 US	3/4" (20mm)
AFA1 US	1" (25mm)
AFA114 US	1 1/4" (32mm)



Reducing Female Adaptor

ARFA1234 US	1/2"x3/4" (15x20mm)
--------------------	---------------------



Male Elbow

AME12 US	1/2" (15mm)
AME34 US	3/4" (20mm)
AME1 US	1" (25mm)
AME114 US	1 1/4" (32mm)



Reducing Male Adaptor

ARMA1234 US	1/2"x3/4" (15x20mm)
ARMA121 US	1/2"x1" (15x25mm)
ARMA1114 US	1"x1 1/4" (25x32mm)



Male Adaptor

AMA12 US	1/2" (15mm)
AMA34 US	3/4" (20mm)
AMA1 US	1" (25mm)
AMA114 US	1 1/4" (32mm)



Reducing Straight Coupling

ARSC3412 US	3/4x1/2" (20x15mm)
ARSC112 US	1"x1/2" (25x15mm)
ARSC134 US	1"x3/4" (25x20mm)
ARSC1141 US	1 1/4"x1" (32x25mm)



Union

APU34 US	3/4" (20mm)
APU1 US	1" (25mm)
APU114US	1 1/4" (32mm)



Reducing Tee

ART3412 US	3/4"x3/4"x1/2" (20x15mm)
ART112 US	1"x1"x1/2" (25x15mm)
ART134 US	1"x1"x3/4" (25x20mm)
ART1141 US	1 1/4"x1 1/4"x1" (32x25mm)



Female tee

AFT12 US	1/2" (15mm)
AFT34 US	3/4" (20mm)
AFT1 US	1" (25mm)



