



# Model 72 "AQUA-MATE"

SUBMERSIBLE PUMP FOR DEWATERING (SUMP)

### COMPARE THESE FEATURES

- 115V single phase/60 Hz, .3 HP, 3.1 Amps, 3400 RPM.
- Thermal overload protection.
- Non-corrosive engineered plastic motor housing, pump housing and base.
- No steel sheet metal parts to rust or corrode.
- All stainless steel screws, switch arm, and lower motor housing.
- Oil-free.
- 2-pole float operated mechanical switch.
- Solid buoyant polypropylene float.
- Engineered plastic impeller.
- UL Listed 9' cord with 3-prong plug.
- Maximum temperature for dewatering - 110°F (43°C).
- Passes 3/8" inch spherical solids.
- 1½" NPT discharge.
- Non-clogging vortex impeller.
- On point— 7-3/8" • Off point— 3-5/8".
- Major width - 9-1/16" • Height - 11-13/16".



AUTOMATIC MODEL SHOWN


"QUALITY PUMPS SINCE 1939"

# 60 Hz DATA

CONSULT FACTORY FOR SPECIAL APPLICATIONS

All models completely submersible and hermetically sealed.

- Variable level Float Switches available.
- Variable level long cycle systems available.
- Alarm systems available.
- Duplex systems available.

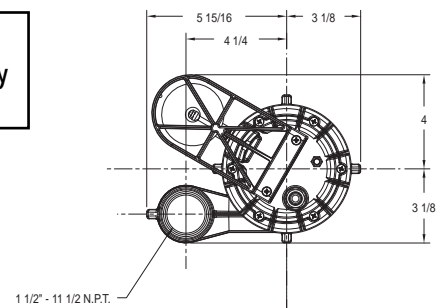

Single Seal	Control Selection				
	Model	Volts - Ph	Mode	Amps	Simplex
	M72	115 1	Auto	3.1	1
	N72	115 1	NonAuto	3.1	2
	BN72	115 1	Auto	3.1	*

\*Single piggyback switch included.

### SELECTION GUIDE

1. Integral float operated mechanical switch, no external control required.
2. Single piggyback variable level float switch or double piggyback variable level float switch. Refer to FM0477.

