


Dimensional Data (inches and [mm]) are Subject to Manufacturing Tolerances and Change Without Notice

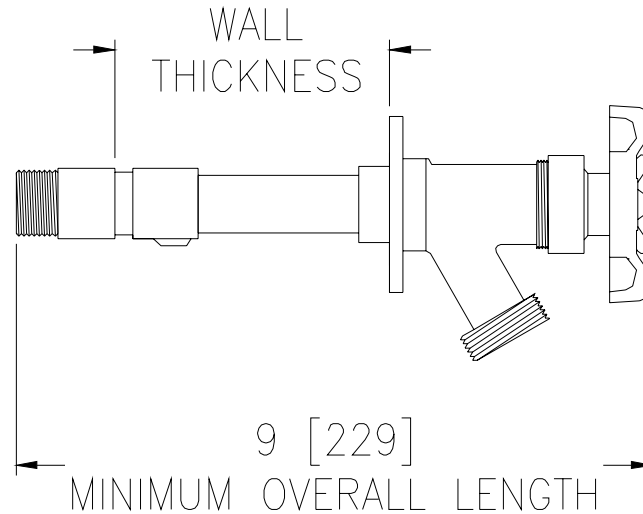

| Wall Thickness In Inches | Approx. Wt. Lbs. [kg] |
|--------------------------|-----------------------|
| 4-6 [102-152] | 2 [1] |
| 8-10 [203-254] | 3 [1] |
| 12 [305] | 4 [2] |

ENGINEERING SPECIFICATION: Z1344 Exposed non-freeze wall faucet complete with exterior chrome finish, brass casing, all bronze interior parts, operating rod with free-floating compression closure valve, wall support, replaceable seat washer, combination 1/2 [13] female solder inlet and 1/2 [13] male IP inlet connection, and 3/4 [19] male hose connection.

OPTIONS (Check/specify appropriate options)

SUFFIXES

- ____ -CP3 3/4 [19] Male Pipe Thread x 3/4 [19] Female Solder
- ____ -PX 1/2 [13] PEX Tube Fitting
- ____ -VB 3/4 [19] Adapter Vacuum Breaker