


Dimensional Data (inches and [mm]) are Subject to Manufacturing Tolerances and Change Without Notice

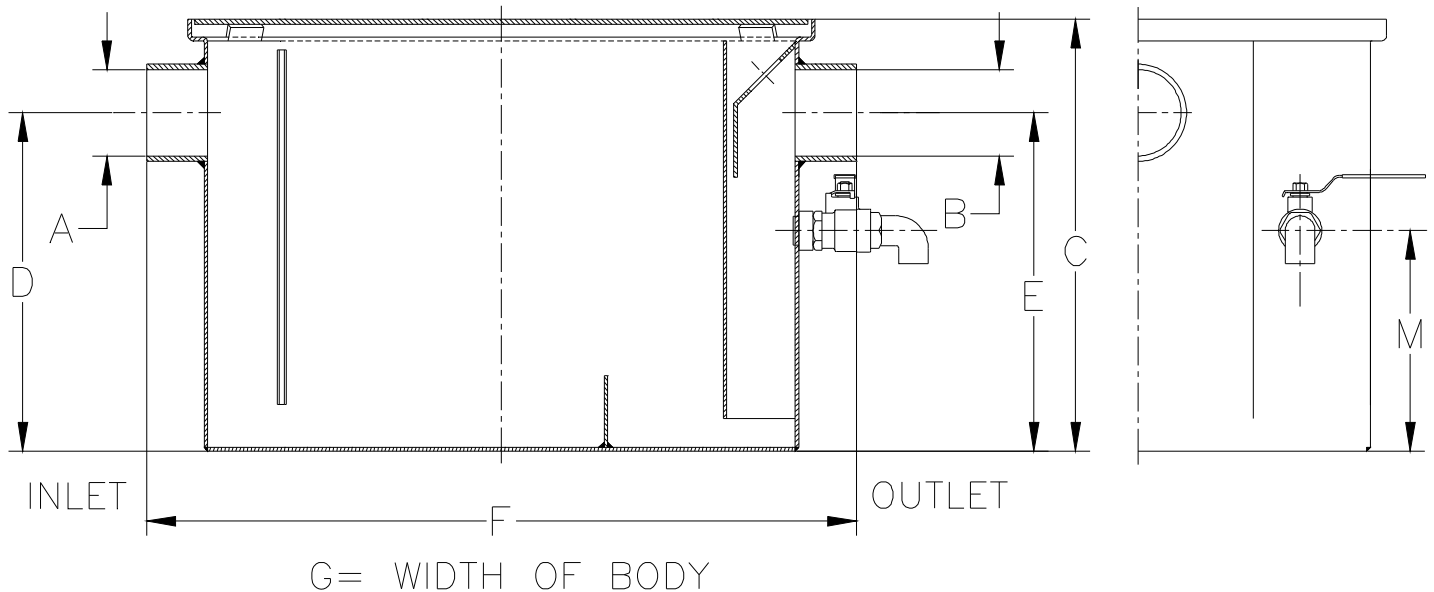

Model Number	A/B Inlet/Outlet No-Hub	Flow Rate G.P.M. [L]	Capacity Grease Lbs. [kg]	Dimension in Inches				
				C	D/E	F	G	M
___ GT2700-4	2 [51]	4 [15]	8 [4]	10 [254]	7 1/4 [184]	15 7/8 [403]	9 7/8 [251]	5 [127]
___ GT2700-7	2 [51]	7 [26]	14 [6]	11 1/8 [283]	8 1/8 [206]	17 1/4 [438]	11 7/8 [302]	6 1/2 [156]
___ GT2700-10	2 [51]	10 [38]	20 [9]	11 3/4 [298]	8 1/4 [210]	19 1/4 [489]	14 [356]	5 3/4 [146]
___ GT2700-15	2 [51]	15 [57]	30 [14]	13 3/8 [340]	9 3/8 [238]	21 1/4 [540]	16 3/4 [425]	6 7/8 [175]
___ GT2700-20	3 [76]	20 [76]	40 [18]	15 [381]	11 3/4 [298]	24 1/8 [613]	17 1/4 [438]	9 1/4 [235]
___ GT2700-25	3 [76]	25 [94]	50 [23]	17 [432]	12 1/2 [318]	26 1/8 [644]	19 7/8 [505]	9 1/2 [241]
___ GT2700-35	4 [102]	35 [132]	70 [32]	18 3/4 [476]	14 1/4 [362]	28 [711]	22 1/2 [572]	11 1/4 [286]
___ GT2700-50	4 [102]	50 [189]	100 [45]	21 1/2 [546]	16 [406]	29 7/8 [759]	24 1/2 [622]	13 [330]

ENGINEERING SPECIFICATION: GT2700-DO

Grease Interceptor, Acid Resistant Coated interior and exterior fabricated grease interceptor, rated at ___ GPM and ___ Lbs. grease capacity, with grease draw-off valve. Gasketed non-skid secured cover, complete with flow control fitting. Regularly furnished with high inlet and outlet connections.

NOTE:

1. Location of outlet from bottom of interceptor cannot be changed. Draw-off connection regularly furnished on outlet side.