



# QUICK TEST FITTINGS

## Application

Designed for use on Backflow Prevention Assemblies to facilitate the connection of a Differential Pressure Test Gauge. Quick Test Fittings, with their integral o-ring and hand-tight installation, eliminate the need for wrenches and Teflon tape. This will result in a time and material savings to the tester.

## Materials

Body (fittings) Brass  
O-rings Buna Nitrile

## Features

Sizes: 1/4", 1/2", 3/4"

Tear Resistant O-rings

SAE 45° Flare Fittings - SAE J513

Fittings knurled for easy gripping


Sold in convenient 3-pack

## Options

- QT-SET - Contains 3 of each fitting size in a convenient carrying case. Includes 3 spare O-rings per size. Case Material: High Density Polyethylene Case dimensions: 8 1/2"x5 1/2"x2 5/8" Weight: 2 lbs.



QT-SET

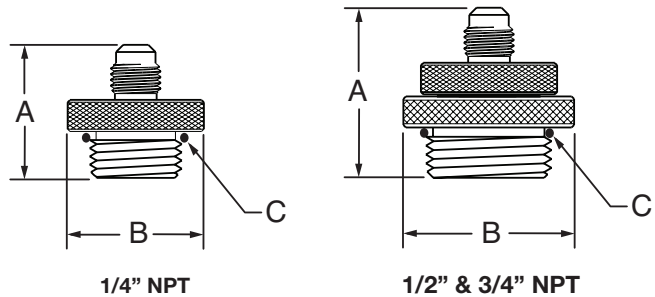

1/4" NPT


1/2" & 3/4" NPT  
(COMBINE WITH 1/4" NPT FITTING)

## Dimensions & Weights (do not include pkg.)

MODEL	FITTING SIZES	FOR VALVE SIZE	DIMENSIONS (approximate)					WEIGHT	
			in.	mm	in.	mm	C (O-ring)	lbs.	kg
RK14-QT	1/4" NPT X 1/4" Flare	1/4"-2"	1 3/64	27	7/8	22	112N	0.1	0.05
RK12-QT	1/2" NPT X 1/4" Flare	2 1/2"-4"	1 15/32	37	1 3/16	30	117N	0.2	0.9
RK34-QT	3/4" NPT X 1/4" Flare	6"-12"	1 15/32	37	1 3/8	35	120N	0.3	0.14

## Typical Installations

Model 3/4" 975XL Shown

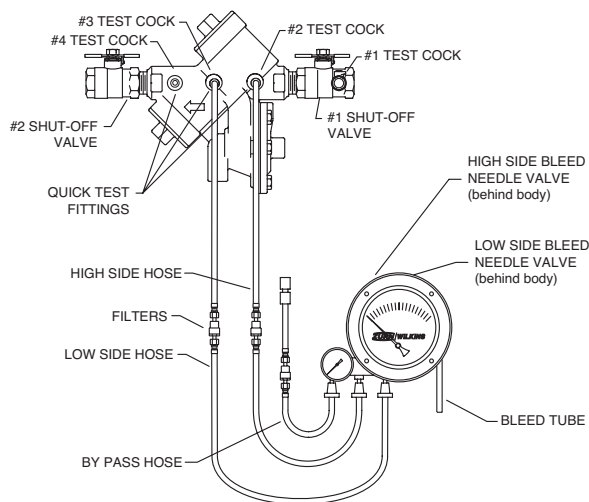

Model 4" 375 Shown

