




Thermal Track™ Straight Panel – QH2TTS Specification Sheet

Tag _____

Dimensional Data: Inches and [mm] are subject to manufacturing tolerances and change without notice.

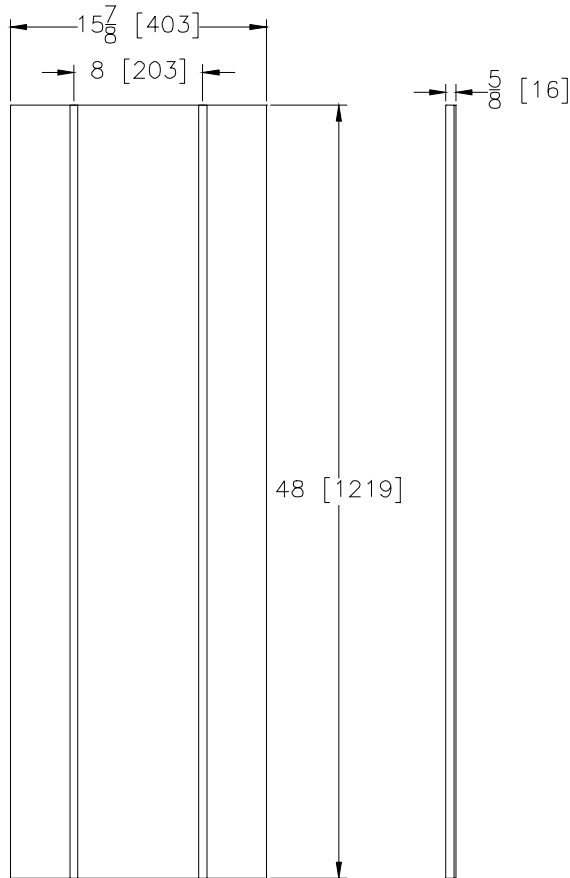

Engineering Specification: Zurn non-structural Thermal Track™ straight panel. This 5/8" thick panel is comprised of Medium Density Fiberboard (MDF) with a highly conductive aluminum layer bonded to the surface. The straight panel is 16" x 48" and contains two parallel grooves milled at 8" on center. The grooves accept 3/8" PEX Barrier and Performa® tubing. Each panel weights approximately 44-50 lbs. per cubic foot (13.3 lbs. per panel).

Accessories

- ___ QH2TTC Thermal Track™ Combination Panel
- ___ QH2TTU Thermal Track™ Utility Panel
- ___ QHR2PC___X 3/8" Barrier Tubing
- ___ QHR2PC___FX 3/8" Performa® Tubing

Rev. B	Date: 11/4/08	C.N. No.99305
Dwg. No. 67074		Prod. No. QH2TTS