




# Digital Heat/Cool Thermostat – QHSTHAC

## Specification Sheet

Tag \_\_\_\_\_

Dimensional Data: Inches and [mm] are subject to manufacturing tolerances and change without notice.

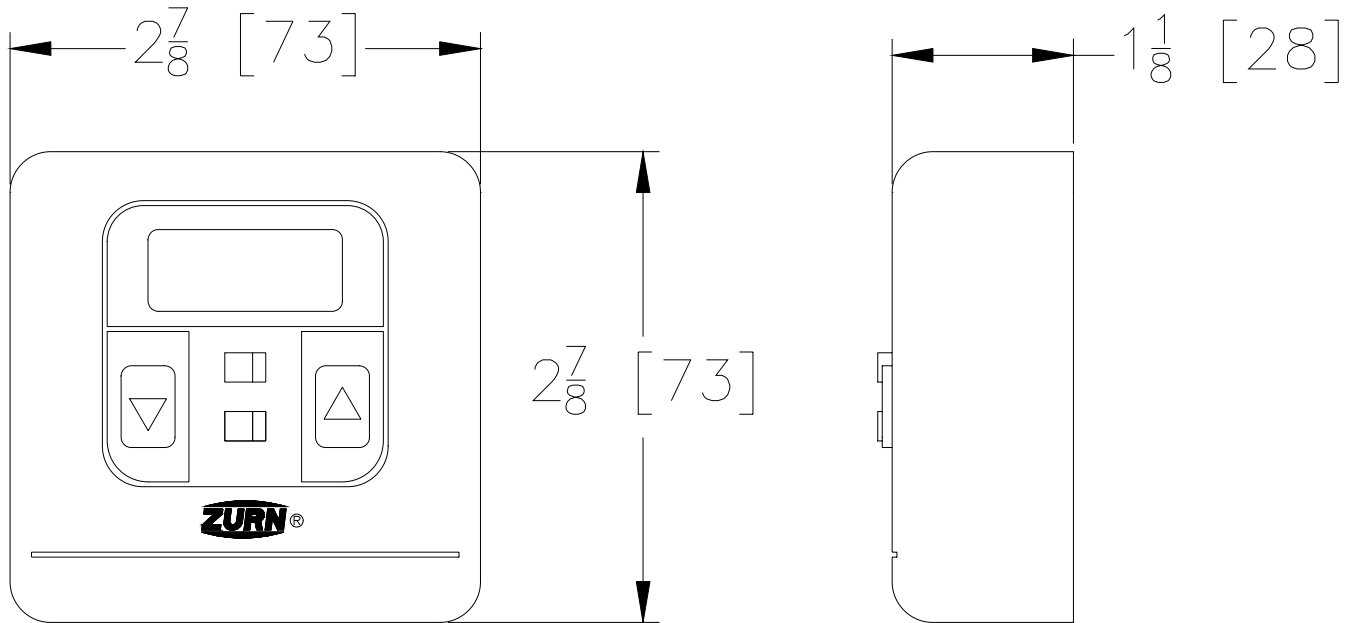

**Engineering Specification:** Zurn 24VAC digital non-programmable heat/cool thermostat. Unit is hard-wired. Thermostat has a selectable Celsius/Fahrenheit readout and an accuracy of +/- 1°F. The temperature setpoint range is 40.0° - 95.0°F (5.0° - 35.0°C). Unit requires a 7-wire installation. The thermostat samples every 30 seconds and has a maximum load of 1 amp. The LCD screen displays room temperature to a tenth of a degree. May be mounted directly to the wall or to an optional mounting plate.

### Accessories

___ QHMZ4P	4-Zone Pump Relay Control
___ QHMZ6P	6-Zone Pump Relay Control
___ QHMZ1P	Single-Zone Pump Relay Control
___ QHSTMP	Thermostat Mounting Plate
___ QHMZ4A	4-Zone Valve Control
___ QHMZ6A	6-Zone Valve Control

Rev. A	Date: 05/05/05	C.N. No. 93314
Dwg. No. 66743	Prod. No. QHSTHAC	