ZURN

Tag _____

Dimensional Data: Inches and [mm] are subject to manufacturing tolerances and change without notice.

$2\frac{7}{8}$ [73] $1\frac{1}{8}$ [28]

$2\frac{7}{8}$ [73]
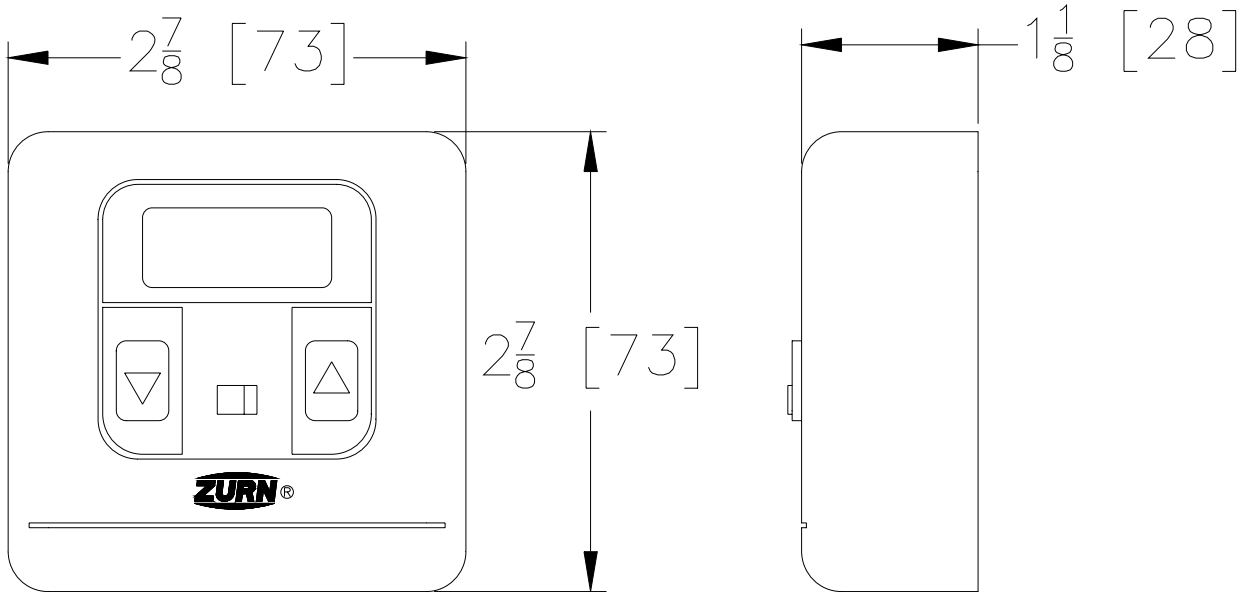
ZURN ®

Engineering Specification: Zurn 24VAC digital non-programmable heat-only thermostat. Unit is hard-wired. Thermostat has a selectable Celsius/Fahrenheit readout and has an accuracy of +/- 1°F. The temperature setpoint range is 40.0° - 95.0°F (5.0° - 35.0°C). The thermostat samples every 30 seconds and has a maximum load rating of 1 amp. Unit requires a 3-wire installation. The LCD screen displays room temperature. May be mounted directly to the wall or to an optional mounting plate.

Accessories

___	QHMZ4P	4-Zone Pump Relay Control
___	QHMZ6P	6-Zone Pump Relay Control
___	QHMZ1P	Single-Zone Pump Relay Control
___	QHSTMP	Thermostat Mounting Plate
___	QHMZ4A	4-Zone Valve Control
___	QHMZ6A	6-Zone Valve Control

Rev. A Date: 05/05/05 C.N. No. 93313	
Dwg. No. 66742	Prod. No. QHSTHO