




Copper Stubout Elbow - QSTUBL__

Specification Sheet

Tag _____

Dimensional Data: Inches and [mm] are subject to manufacturing tolerances and change without notice.

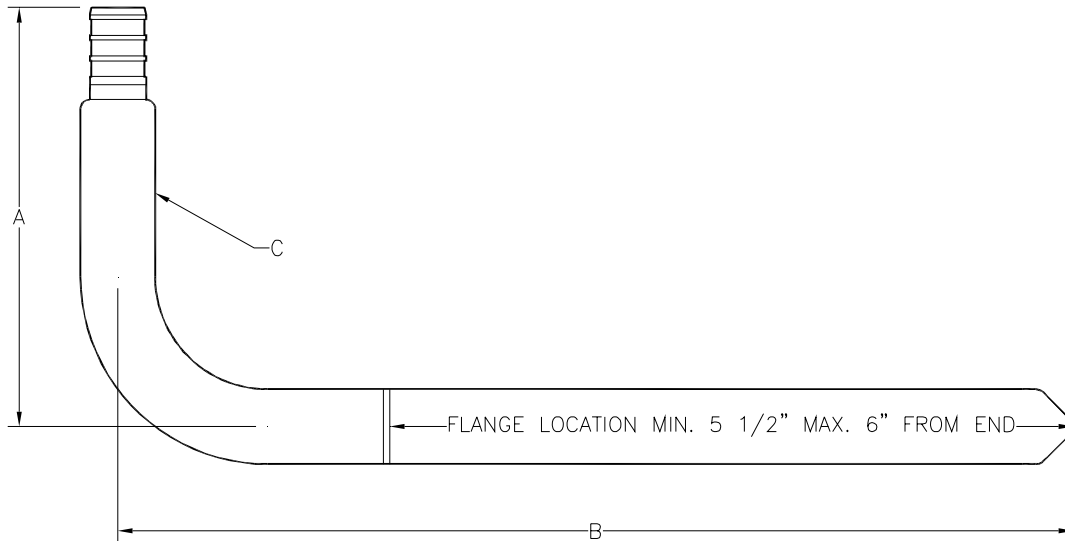

Part Number	Description	Barb Size	'A' in [mm]	'B' in [mm]	'C' in [mm]
QSTUBLXX	8" Copper Stubout Elbow	1/2"	3-1/2 [89]	8 [203]	1/2"
QSTUBLXXF	8" Copper Stubout Elbow with Nailing Flange	1/2"	3-1/2 [89]	8 [203]	1/2"
QSTUBL6XX2	6" Copper Stubout Elbow	3/8"	3-1/2 [89]	6 [152]	3/8"
QSTUBL6XX	6" Copper Stubout Elbow	1/2"	3-1/2 [89]	6 [152]	1/2"
QSTUBLXX4	8" Copper Stubout Elbow	3/4"	4-1/2 [114]	8 [203]	3/4"
QSTUBLXX5	8" Copper Stubout Elbow	1"	6 [152]	8 [203]	1"

Engineering Specification: ZurnPEX® 1/2" Copper Stubout Elbow. The QSTUBL__ elbow is used in conjunction with PEX tubing. End spun closed allows for system testing before valves or other fittings are installed. Meets NSF® and ASTM requirements.

Accessories

- ___ QCLP2X 3/8" QuickClamp™ Crimp Rings
- ___ QCLP3X 1/2" QuickClamp™ Crimp Ring
- ___ QCLP4X 3/4" QuickClamp™ Crimp Rings
- ___ QCLP5X 1" QuickClamp™ Crimp Ring
- ___ QCR2X 3/8" Copper Crimp Ring
- ___ QCR3X 1/2" Copper Crimp Ring
- ___ QCR4X 3/4" Copper Crimp Ring
- ___ QCR5X 1" Copper Crimp Ring

Rev. A	Date: 06/20/08	C.N. No. 98666
Dwg. No. 82627		Prod. No. QSTUBL