

TAG _____

Architectural/Engineering Specification:

19" x 16" vitreous china undermount lavatory.

Product Features:

- 19" [483 mm] x 16" [406 mm]
- · Vitreous china
- · Rimless oval design for undermount
- installation
- Front overflow
- Waste: 1-1/4" O.D.
- Depth: 5"
- Shipping Weight: 22 lbs.


Recommended Trim:

Z8743-PC	Grid Strainer
Z8700 Series	P-Trap
Z8800 Series	Top with Flexible Supplies
Z8946-1-NT	ADA Trap, Stop, and Supply
	Protectors

Optional Trim:

Z8746-PC	ADA Grid Strainer
Z8946-3-NT	ADA Trap, Stop, and Supply
	Protectors for Offset Grid Strainer



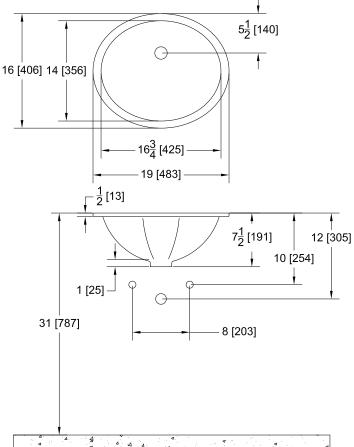

Architectural/Engineering Approval

Rough-in/Overview dimensions for Z5220 Series

The information contained in this document is subject to change without notice. Please contact Zurn for most up to date information.

See Zurn One Systems for suggested packages.

Compliance and Certification:

ADA Compliant



Meets the American Disabilities Guidelines and ANSI A117.1 requirements when installed 34"[84mm] from finished floor. Fixture dimensions meet ASME A112.19.2/CSA B45.1 requirements. In Canada - Consult local codes and standards.

ZURN INDUSTRIES, LLC 511 W. Freshwater Way, Milwaukee, WI U.S.A. 53204 · Ph. 1-855-ONE-ZURN, Fax 919-775-3541 In Canada: ZURN INDUSTRIES LIMITED 7900 Goreway Drive, Unit 10, Brampton, Ontario L6T 5W6, Ph. 905-405-8272, Fax 905-405-1292