




Z1350-EZ

NARROW WALL HYDRANT WITH MOUNTING BRACKETS Encased, Moderate Climate

SPECIFICATION SHEET

TAG _____

Dimensional Data (inches and [mm]) are Subject to Manufacturing Tolerances and Change Without Notice

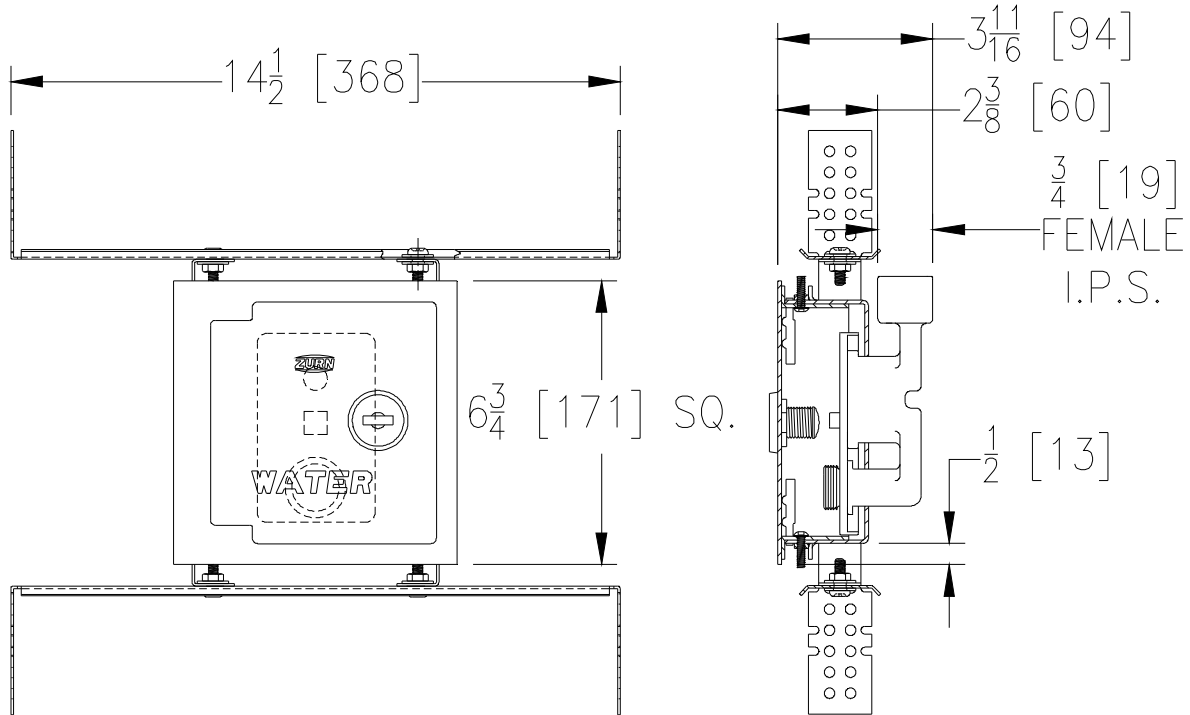

Wall Thickness Inches	Approx. Wt. Lbs. [kg]
4 [102]	6 [3]

ENGINEERING SPECIFICATION: ZURN Z1350-EZ Encased moderate climate wall hydrant for narrow wall installation. Complete with bronze body, all bronze interior parts, replaceable seat washer, screwdriver operated stop valve in supply, key operated control valve, and 3/4 [19] IP female inlet and 3/4 [19] male hose connection standard, stainless steel box and hinged cover with cylinder lock and "WATER" stamped on cover. Complete with mounting brackets and hardware for installation and horizontal adjustment inside a 16 [406] on center stud wall.

OPTIONS (Check/specify appropriate options)

SUFFIXES

- ___ -RK Hydrant Parts Repair Kit
- ___ -VB 3/4 [19] Adapter Vacuum Breaker
- ___ -24 Mounting Brackets (For 24 [610] on Center Stud Wall)
- ___ -34EL 3/4 [19] 90° IP Inlet Elbow Adapter
- ___ -34FS 3/4 [19] Solder Female Inlet Adapter



****NOTE:** The adjustable sleeve on the stainless steel box is provided with a gasket as standard, but additional caulking of all inside joints is required (by others) after the hydrant box has been properly set. Caulking should be performed on all open seams, including the seams where the gasket is present.

REV. B	DATE: 10/22/10	C.N. NO. 111946
DWG. NO. 82523	PRODUCT NO. Z1350-EZ	