




# Z1391 POST HYDRANT

SPECIFICATION SHEET

TAG \_\_\_\_\_

Dimensional Data (inches and [ mm ]) are Subject to Manufacturing Tolerances and Change Without Notice

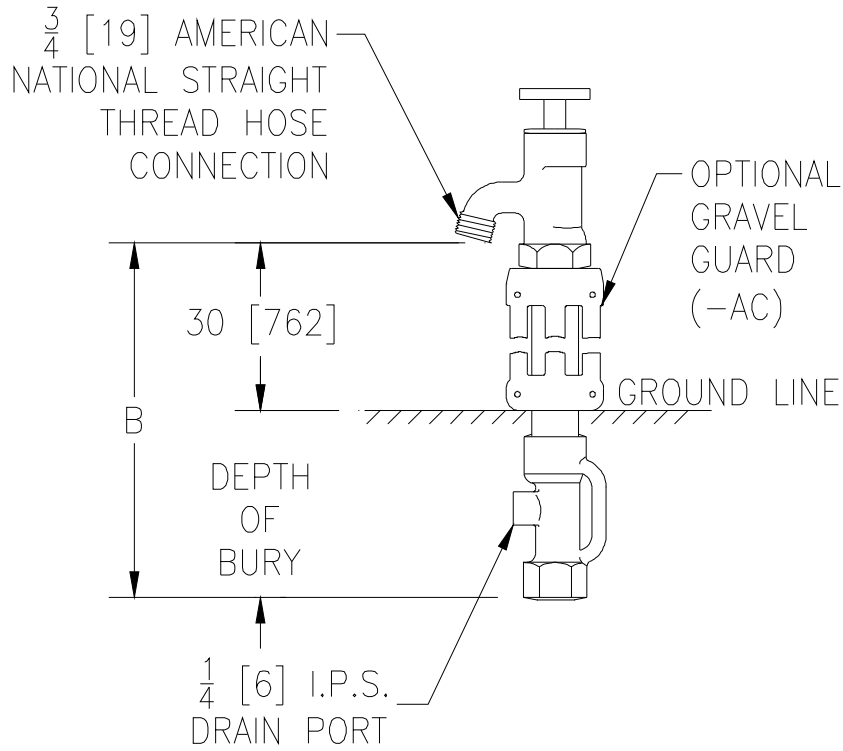

Depth of Bury in Feet [mm]	B Feet [mm]	Approx. Wt. Lbs. [kg]
2 [610]	4-1/2 [1372]	25 [11]
3 [914]	5-1/2 [1676]	29 [13]
4 [1219]	6-1/2 [1981]	33 [15]
5 [1524]	7-1/2 [2286]	37 [17]
6 [1829]	8-1/2 [2591]	41 [19]
7 [2134]	9-1/2 [2896]	45 [20]
8 [2438]	10-1/2 [3200]	49 [22]

**ENGINEERING SPECIFICATION:** Z1391 Exposed, non-freeze post hydrant, complete with galvanized casing, all bronze interior parts, bronze seat, replaceable seat washer, and non-turning operating rod with free-floating compression closure valve and 3/4 [19] connection. Operating key included. Hydrant is equipped with a tapped 1/4 [6] drain port in valve housing.

**OPTIONS** (Check/specify appropriate options)

**SUFFIXES**

- \_\_\_ -AC Aluminum Casing Guard
- \_\_\_ -VB External Vacuum Breaker
- \_\_\_ -WH Wheel Handle
- \_\_\_ -HG Hydrant Guard

\* Regularly furnished unless otherwise specified.

Zurn Industries, LLC | Specification Drainage Operation  
 1801 Pittsburgh Avenue, Erie, PA U.S.A. 16502 · Ph. 855-663-9876, Fax 814-454-7929  
 In Canada | Zurn Industries Limited  
 3544 Nashua Drive, Mississauga, Ontario L4V 1L2 · Ph. 905-405-8272, Fax 905-405-1292  
[www.zurn.com](http://www.zurn.com)

Rev. D  
 Date: 01/07/14  
 C.N. No. 130402  
 Prod. | Dwg. No. Z1391