




Z831B4-XL-ICT-TR

TempReady®
TAG _____

TempReady® 8" Widespread Gooseneck Faucet



Patented and Patents Pending

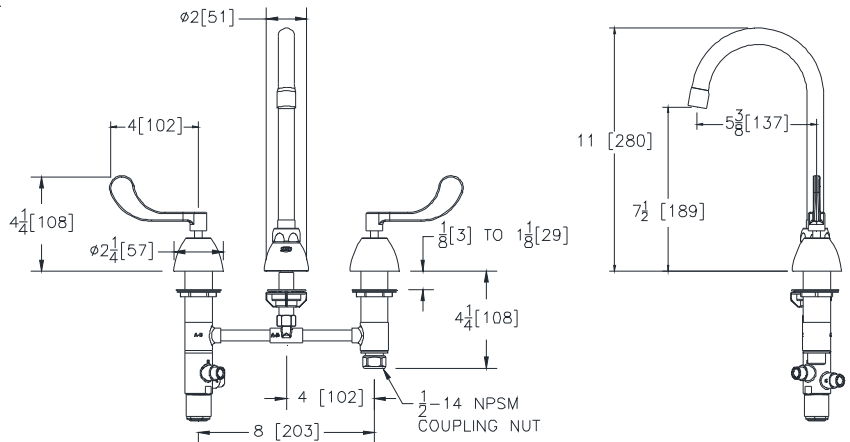

Note: All dimensions are for reference only. Do not use for pre-plumbing

Product Description

Zurn TempReady® is an ASSE 1070 listed faucet and features an integral thermostatic mixing cartridge to assist in the prevention of scalding. Hot water temperature may be set between 80°F - 120°F (27°C - 49°C). The body is chrome plated, cast brass. The assembly includes quarter turn ceramic disc cartridges and a 5-3/8" (137 mm) centerline rigid or swing gooseneck spout. Faucet is furnished with a 2.2 GPM (8.3 L/min) pressure compensating aerator, 4" (101.6 mm) color coded metal wrist blade handles, and mounting hardware.

Zurn Lead Compliant* "XL" products are a line of durable, high quality brass faucets and fixtures that are designed and manufactured to comply with state laws and local codes that mandate lead content levels. Zurn "XL" products are manufactured with *not more than 0.25% lead content when used with respect to wetted surfaces of pipes and pipe fittings, plumbing fitting and fixtures: California Health & Safety Code § 116875; Vermont 9 VCA § 2470h

Features:

- Outlet Temp Range 80°-120°F (27-49°C)
- Hot Supply Temp 120-180°F (49-82°C)
- Cold Supply Temp 40-75°F (4-24°C)
- Set Temp Accuracy +/- 3°F (+/- 1.7°C)
- Max Working Pressure 125 psi (860 kPa)
- Max H/C Pressure Differential 20%
- Inlet check valves to protect against cross flow



Meets the American Disabilities Guidelines and ANSI A117.1 requirements when lavatory is installed 34" [864mm] from finished floor.

In Canada - Consult local codes and standards.

All dimensions and specifications are subject to change without notice.



Zurn Industries, LLC

5900 Elwin Buchanan Drive, Sanford, NC U.S.A. 27330 · Ph. 1-800-997-3876, Fax 919-775-3541

In Canada | Zurn Industries Limited

7900 Goreway Drive Unit 10, Brampton, Ontario L6T5W6 · Ph. 905-405-8272, Fax 905-405-1292

www.zurn.com

Optional Accessories

Suffix	Description
<input type="checkbox"/> -FC	2.0 GPM [7.6 L] Laminar Flow Control in Base of Spout
<input type="checkbox"/> -FC__	Plain End Spout with Flow Control in Base of Spout (Specify GPM Flow 0.5, 1.0, 1.5)
<input type="checkbox"/> -G	1-1/4" [32mm] Grid Strainer Drain
<input type="checkbox"/> -GH	1-1/4" [32mm] Offset Handicap Grid Drain
<input type="checkbox"/> -HCT	Hot/Cold Text Indexes
<input type="checkbox"/> -P	1-1/4" [32mm] Pop-up Drain
<input type="checkbox"/> -PT	1-1/4" [32mm] Cast Brass P-Trap with a 7-1/2" [191mm] Long 17-Gauge Wall Bend
<input type="checkbox"/> -140	Restricted 140 Swing Spout

Vandal-Resistant Pressure Compensating

Suffix	Description
<input type="checkbox"/> -2F	2.2 gpm/8.3 Lpm Aerator
<input type="checkbox"/> -3F	0.5 gpm/1.9 Lpm Spray Outlet
<input type="checkbox"/> -4F	2.2 gpm/8.3 Lpm Laminar Flow Outlet
<input type="checkbox"/> -16F	1.0 gpm/3.8 Lpm Spray Outlet
<input type="checkbox"/> -17F	1.5 gpm/5.7 Lpm Aerator
<input type="checkbox"/> -18F	1.5 gpm/5.7 Lpm Laminar Flow Outlet
<input type="checkbox"/> -22F	1.0 gpm/3.8 Lpm Laminar Flow Outlet
<input type="checkbox"/> -28F	0.5 gpm/1.9 Lpm Laminar Flow Outlet

Non-Vandal-Resistant Pressure Compensating

Suffix	Description
<input type="checkbox"/> -7F	1.0 gpm/3.8 Lpm Spray Outlet
<input type="checkbox"/> -14F	2.2 gpm/8.3 Lpm Laminar Flow Outlet
<input type="checkbox"/> -19F	1.5 gpm/5.7 Lpm Anti-Microbial Laminar Flow Outlet
<input type="checkbox"/> -21F	1.0 gpm/3.8 Lpm Female Laminar Flow Outlet
<input type="checkbox"/> -23F	1.5 gpm/5.7 Lpm Aerator
<input type="checkbox"/> -26F	0.5 gpm/1.9 Lpm Spray Outlet

Aqua-FIT® is a trademark of Zurn Industries, LLC.

Rev. 5
Date: 3/12/2018
C.N. No.
Prod. | Dwg. No. 316164