



# Z1400-B


FLOOR CLEANOUT WITH "TYPE B" COVER AND EZ1™ TECHNOLOGY

SPECIFICATION SHEET

TAG \_\_\_\_\_

**PATENT  
PENDING**

Dimensional Data (inches and [ mm ]) are Subject to Manufacturing Tolerances and Change Without Notice

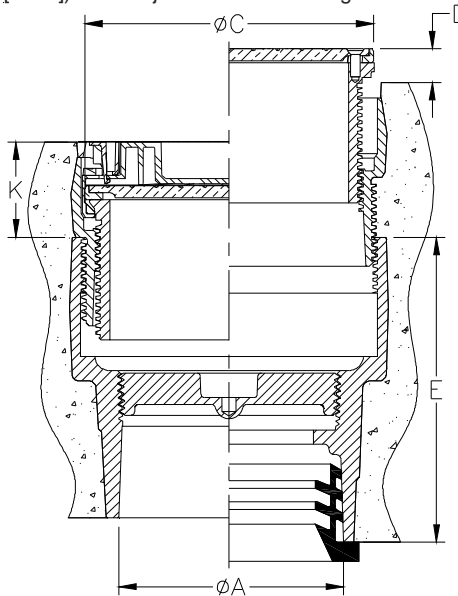

Dimensions in Inches [mm]							Approx. Wt. Lbs [kg]
A Pipe Size	Cover Designation	C	D		K		
			Min	Max	Min	Max	
2 [51]	-5B	5-5/32 [131]	0	1 [25]	1-23/32 [44]	2-15/16 [75]	10 [5]
3-4 [76-102]		5-5/32 [131]	0	1 [25]	1-23/32 [44]	2-15/16 [75]	12 [5]
2 [51]	-6B	6-8/32 [156]	0	31/32 [25]	1-11/16 [43]	2-27/32 [72]	11 [5]
3-4 [76-102]		6-8/32 [156]	0	31/32 [25]	1-11/16 [43]	2-27/32 [72]	13 [6]
6 [152]	-8B	7-7/8 [200]	0	1 [25]	1-7/8 [48]	3-1/32 [77]	19 [9]

**ENGINEERING SPECIFICATION:** ZURN Z1400-BZ1 cleanout, Dura-Coated cast iron body with bottom outlet, with gas and water tight threaded ABS tapered plug, and top assembly. EZ1™ drainage series is engineered to simplify product installation and comprised of concrete shield to provide up to 1" [25] of vertical post pour adjustment, pre-packaged shims for tilt correction, and integrated, self-contained "Type B" light duty scoriated cover with rough-in cover for protection during concrete pour. Cleanout is designed in accordance with ASME A112.36.2M.

**OPTIONS** (Check/specify appropriate options)

**PIPE SIZE**

- 2-3 [51-76]
- 4 [102]
- 6 [152]
- 2-4 [51-102]
- 3 [76]
- 6 [152]

(Specify size/type) **OUTLET**

- \_\_\_\_\_ NH No-Hub
- \_\_\_\_\_ NH No-Hub
- \_\_\_\_\_ NH No-Hub
- \_\_\_\_\_ NL Neo-Loc
- \_\_\_\_\_ NL Neo-Loc
- \_\_\_\_\_ NL Neo-Loc

**'E' BODY HT. DIM.**

- 4-3/4 [121]
- 5 [127]
- 5-1/2 [140]
- 4-3/4 [121]
- 5-7/16 [138]
- 5-1/2 [140]

**PREFIXES**

- \_\_\_\_\_ ZB D.C.C.I. w/ Polished Bronze Top
- \_\_\_\_\_ ZN D.C.C.I. w/ Polished Nickel Bronze Top\*
- \_\_\_\_\_ ZS D.C.C.I. w/ Polished Stainless Steel Top

**SUFFIXES**

- \_\_\_\_\_ -AR Acid Resisting Epoxy Coated Finish
- \_\_\_\_\_ -BP Bronze Plug (Not Available for 3 [76] Neo-Loc Outlet)
- \_\_\_\_\_ -G Galvanized Cast Iron
- \_\_\_\_\_ -TC Neo-Loc Test Cap Gasket (2-3-4 [51-76-102] NL Bottom Outlet Only)
- \_\_\_\_\_ -UP 1-3/4 [44] Pre-Pour Adjustment Extension Adapter
- \_\_\_\_\_ -VP Vandal-Proof Screws

\* Regularly furnished unless otherwise specified.