

ASSEMBLY INSTRUCTIONS

Solera 37" Barrel Chandelier

Item # SK5060


NOTICE:

This light fixture should be installed in accordance with all applicable, local installation codes, and by a person familiar with the construction and operation of it, as well as the hazards involved. Inspect item and contents carefully. If any damage or defect is found, do not install. Retain all packaging material until installation is complete and approved.

TOOLS REQUIRED (NOT INCLUDED):

Phillips Screwdriver	Slotted Screwdriver	Wire Strippers
Slip Joint Pliers	Measuring Tape	Chain Pliers
Wire Cutters		

PERSONS REQUIRED: Two

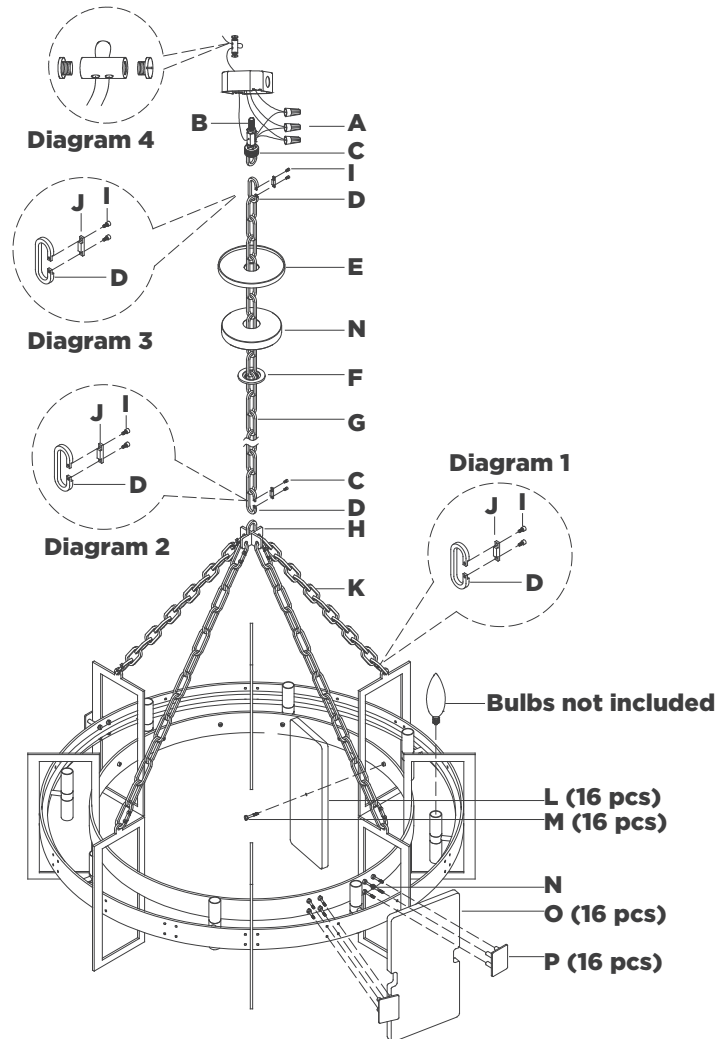

1. Carefully remove all parts from the box. Place on a clean, soft surface.
2. It is recommended to install a 1/4 IPS threaded pipe, secured to a structural member of the building. Then install threaded nipple **(B)** into receiver and tighten with wrench.

NOTE: Item must be supported independent of the junction box due to hanging weight.

3. Remove lock collar **(C)** from chain **(G)** and secure to threaded receiver attached to structural member by tightening locknut.
4. Install canopy **(E)** and crystal **(N)** to collar loop **(C)** and secure with collar ring **(F)**.
5. Determine desired overall length, and amount of chain **(G)** needed. Shorten chain using chain pliers. (Keep extra chain)


ASSEMBLY INSTRUCTIONS

Solera 37" Barrel Chandelier

Item # SK5060

NOTICE:

This light fixture should be installed in accordance with all applicable, local installation codes, and by a person familiar with the construction and operation of it, as well as the hazards involved. Inspect item and contents carefully. If any damage or defect is found, do not install. Retain all packaging material until installation is complete and approved.

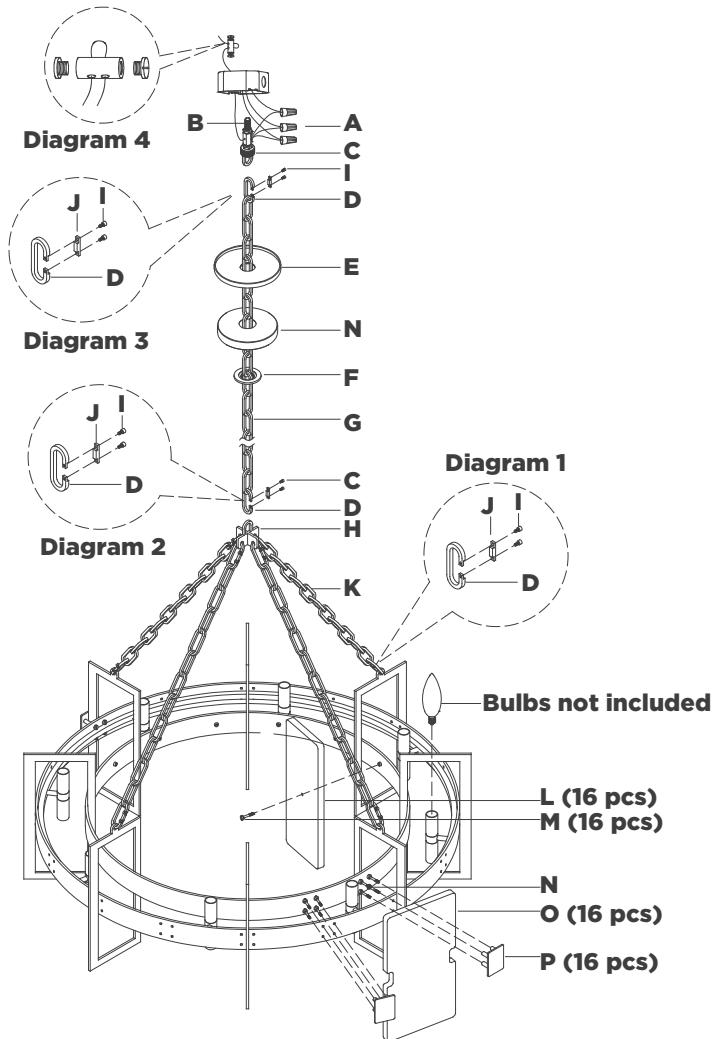

6. Attach chains **(K)** to hooks on fixture frame and hooks on fixture loop **(H)** using quick links **(D)**. Then secure quick links **(D)** by securing metal part **(J)** to quick links **(D)** using screws **(I)** (see diagram 1).

NOTE: It is recommended to have a helper assist in supporting the fixture for step 7.


7. Attach chain **(G)** to collar loop **(C)** and fixture loop **(H)** using quick links **(D)**. Then secure quick links **(D)** by securing metal part **(J)** to quick links **(D)** using screws **(I)** (see diagram 2 & 3).
8. Thread fixture wire, ground wire and safety cable through chain **(K)**, fixture loop **(H)** and chain **(G)**.

NOTE: When you reach the collar loop **(C)**, ensure there is no tension on the wires. Cut excess wires, being sure to leave enough to reach the junction box. Do not cut safety cable.

9. Separate two sides of molded wire, and strip insulation on each 5/8".
10. Loosen collar ring **(F)** and let crystal **(N)** and canopy **(E)** slip down chain **(G)** carefully.
11. Twist all fixture wires together, and slip through center hole of collar loop **(C)**.

NOTE: Untwist wires and separate to prepare for connection.

ASSEMBLY INSTRUCTIONS

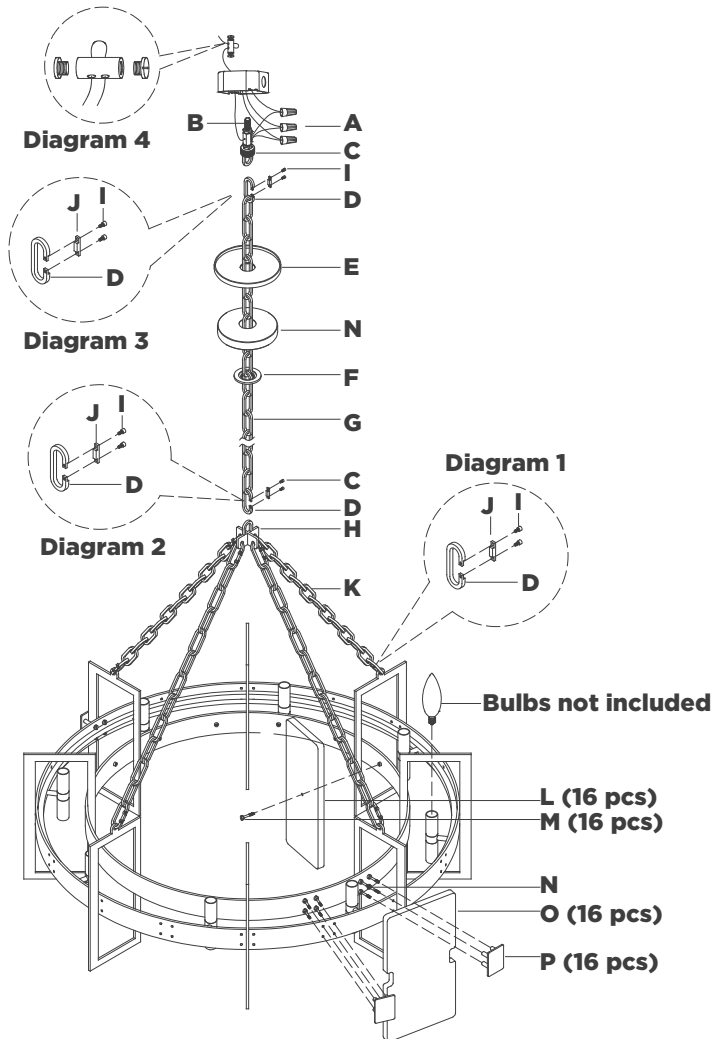

Solera 37" Barrel Chandelier

Item # SK5060

NOTICE:

This light fixture should be installed in accordance with all applicable, local installation codes, and by a person familiar with the construction and operation of it, as well as the hazards involved. Inspect item and contents carefully. If any damage or defect is found, do not install. Retain all packaging material until installation is complete and approved.

12. Loosen cable lock and install to end of safety cable. Run safety cable through junction box and around structural member of building. Insert cable through cable lock and tighten the ends with a screwdriver to secure (See diagram 4).
13. Connect fixture ground wire (bare copper) to the supply ground wire (usually green or bare copper) using wire nut **(A)**.
NOTE: It is imperative that the fixture is grounded.
14. Connect fixture neutral wire (ribbed) to the supply neutral wire (usually white) using wire nut **(A)**.
15. Connect fixture hot wire (smooth with markings) to the supply hot wire (usually black) using wire nut **(A)**.
CAUTION: Do not reverse the hot and neutral connections.
16. Make sure all wire connections are tight, then carefully tuck into the junction box.
17. Install canopy **(E)** and crystal **(N)** to collar loop **(C)** and secure with collar ring **(F)**.
NOTE: It is recommended to have a helper assist in supporting the fixture for step 18.
18. Install glass sheets **(O)** to outer fixture frame and secure by securing thumb screws **(N)** to metal plates **(P)**. Tighten thumb screws **(N)**.


ASSEMBLY INSTRUCTIONS

Solera 37" Barrel Chandelier

Item # SK5060

NOTICE:

This light fixture should be installed in accordance with all applicable, local installation codes, and by a person familiar with the construction and operation of it, as well as the hazards involved. Inspect item and contents carefully. If any damage or defect is found, do not install. Retain all packaging material until installation is complete and approved.

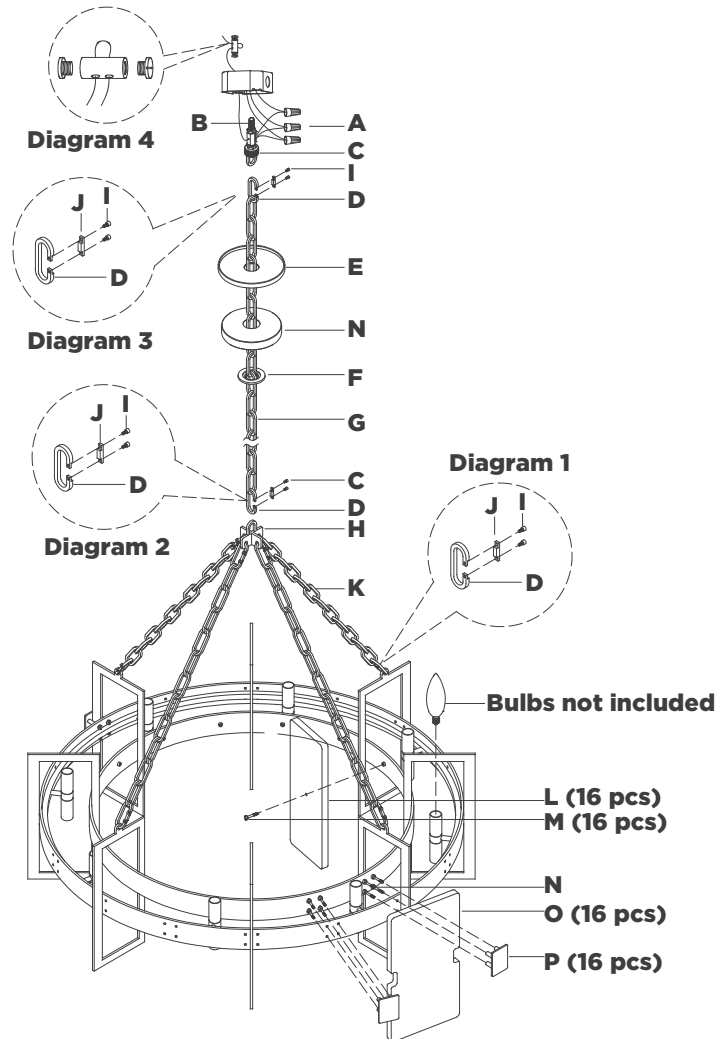

19. Install glass sheets **(L)** to inner fixture frame and secure by securing thumb screws **(M)**. Tighten thumb screws **(M)**.
20. Install light bulbs into the sockets.

CARE INSTRUCTIONS: Clean only with a soft dry cloth or feather duster. Do not use abrasive or chemical agents.