

- ☐ Model 4737 Recessed ☐ Model 4737-10 — Semi-Recessed (recesses 21/8"; projects 2") □ Model 4737-11 — Surface-Mounted (projects 41/8")
- Contemporary Series Satin Finish
- Concealed Hinge and Lock

#### **Product Materials**

**CABINET:** 22 gauge stainless steel with exposed surfaces in architectural satin finish. Welded construction with burr-free edges.

**DOOR:** 18 gauge stainless steel. ½" return for maximum rigidity. Concealed full length stainless steel piano hinge and tumbler lock.

PUSH FLAP DOOR: 22 gauge stainless steel with exposed surfaces in architectural satin finish. Heavy-duty stainless steel piano hinge.

**WASTE RECEPTACLE INSERT** fabricated of leakproof molded plastic.

### Capacity

1.5 gal (0.2 cu. ft.)

## Operation

Waste container removable by unlocking cabinet door. Furnished with waxed paper liner. Box of 500 waxed paper liners are available by ordering part number P11-022.

#### Installation

Page 1 of 2

Verify all rough-in dimensions prior to installation. Recessed unit requires rough wall opening 11%"W x 1534"H x 4"D (Semi-recessed unit only 21/8" deep). Secure to framing with mounting screws (included) at holes provided. Shim at screw points as required.

## **Guide Specification**

Recessed napkin disposal shall be fabricated of stainless steel with exposed surfaces in satin finish. Door with full-length concealed piano hinge and lock. Self-closing push flap door secured by piano hinge. Removable molded plastic receptacle.


Overall dimensions: 13"W x 17%"H x 41/8"D.



# **& ADA Compliant**

- Consult local and national accessibility codes for proper installation guidelines.
- Conformity and compliance to local and national codes is the responsibility of the installer.



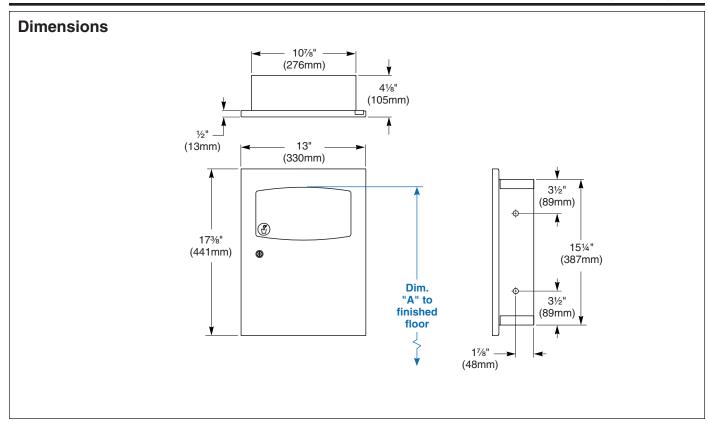

Dim. "A" Key Surface:	For Dim. "A"	Top of Rough Wall Opening	Bottom of Rough Wall Opening
Top of Door (5½" Door Opening) to Finished Floor	48" (1219mm)	49" (1245mm)	33¼" (845mm)
	45" (1143mm)	46" (1168mm)	30¼" (768mm)
	42" (1067mm)	43" (1092mm)	27¼" (692mm)
	36" (914mm)	37" (940mm)	21¼" (540mm)
	33" (838mm)	34" (864mm)	18¼" (464mm)
Rough wall opening:			
Surface Mount:	No rough opening, see overall dimensions		
Recessed:	11%" (289mm) Wide x 15%" (400mm) High x 4" (102mm) Deep		
Semi-Recessed:	11%" (289mm) Wide x 15%" (400mm) High x 2" (51mm) Deep		