


**OPTIONAL ELECTRONIC ADD-ON  
3 POSITION SWITCH**

- AUTO:** Electronic Faucet functions according to regular settings.
  - OFF:** Solenoid is blocked from operating so cleaning staff can clean out sink without faucet operating.
  - ON:** Solenoid goes into continuous run so water lines can be flushed with high temperature water.
- (Note: Verify on the specific product specification sheet what temperature it should be limited to as higher temperatures may damage sensor components.)

**060651A**

- 3 Position Switch Add-on Package – Keyed Switch  
For use on 590-PHDF, 590T, 591T, 590TP, 591TP, 600T, 620TP, 630TP, 1500T3, 1500T4 and 3000T Series.

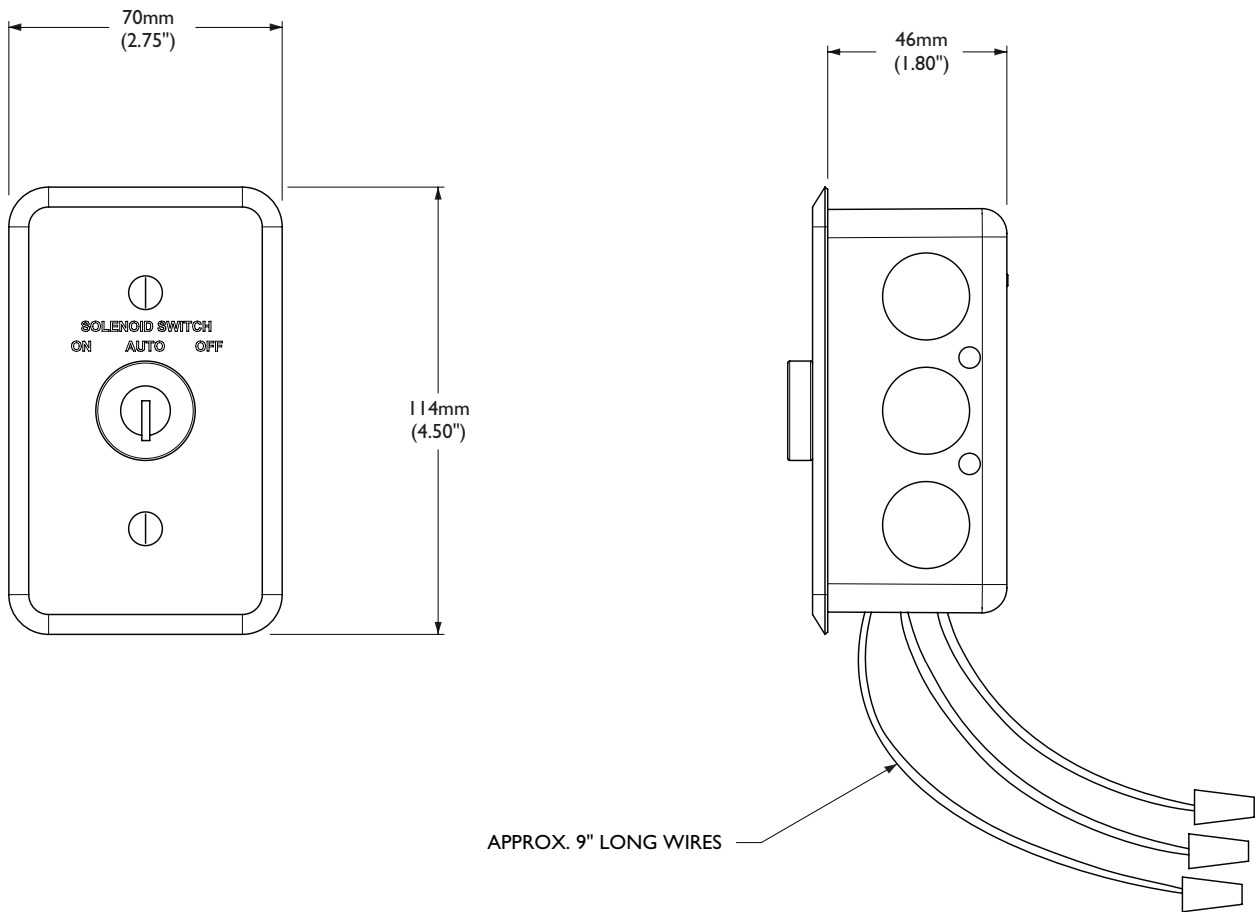

**Note:** May be used with ALL control box options where prolonged 'ON' or 'OFF' water is required (ie., cleaning of sink).

**Note:** To be used with control box option No. 0 and ELAVT0001ARI in 'ON' position for high temperature water flush as dictated by facility infection control procedure. Refer to the specific product specification sheet for high temperature/cycle time applicable to the faucet being specified. Not recommended for ELAVT0008ARI as thermostatic mixing valve limits the higher temperature water flow output.

Note: Measurements may vary ± 6mm (0.25")

Refer to [www.specselect.com](http://www.specselect.com) for individual models.

Note: Use this page front and back as a product submittal sheet.