



Brenham™
Wall-Mount Bathroom Sink
K-1997-SS1NR

Features

- Single faucet hole
- Oval basin
- Sealed overflow drain
- Right-hand hole drilled for soap or lotion dispenser
- Includes wall hanger
- Antimicrobial finish inhibits the growth of mold-, mildew-, stain-, and odor-causing bacteria on the fixture surface. This product does not protect users against bacteria, viruses, or other disease organisms. Always clean and wash this product thoroughly before and after each use

Material

- Vitreous china

Installation

- Wall-mount
- Drilled for concealed arm carrier installation

Optional Products/Accessories

K-8998 P-Trap
K-1998 Shroud



ADA **CSA B651** **OBC**

Codes/Standards

ASME A112.19.2/CSA B45.1
ADA
ICC/ANSI A117.1
CSA B651
OBC

KOHLER® Vitreous China Bathroom Sink Lifetime Limited Warranty



See website for detailed warranty information.

Available Colors/Finishes

Color tiles intended for reference only.

Color Code Description

 0 White

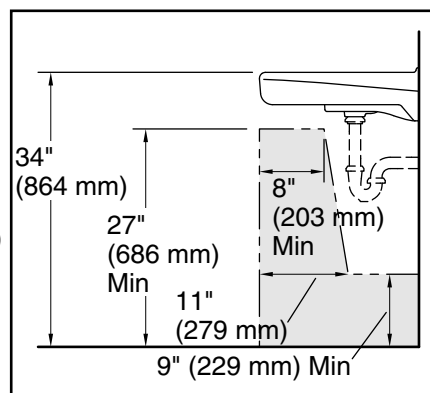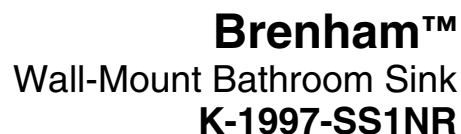

Technical drawing of a standard installation of a 12-inch horizontal branch connection. The drawing shows a side view of the fitting with various dimensions in inches and millimeters. Key dimensions include:

- Total height: 31" (787 mm)
- Distance from top to centerline: 29-1/8" (714 mm)
- Distance from centerline to bottom: 28-1/2" (724 mm)
- Horizontal distance from wall to centerline: 21-15/16" (557 mm)
- Horizontal distance from wall to branch centerline: 9-1/4" (235 mm)
- Branch diameter: 3-1/2" (89 mm)
- Branch offset: 1-1/2" (38 mm)
- Distance from branch centerline to bottom: 6-1/2" (165 mm)
- Distance from bottom to concealed arm hole locations: 7-3/4" (197 mm)
- Horizontal distance between concealed arm hole locations: 4" (102 mm)

Labels include: OD (Outside Diameter), Hot, Cold, and Concealed Arm Hole Locations.

Notes

NOTES
Install this product according to the installation instructions.

Product dimensions are nominal and may vary per ASME A112.19.2 tolerances.

ADA, OBC, CSA B651 compliant when installed to the specific requirements of these regulations.

Number of deck holes: 2

Soap/Lotion hole: 1-1/4" (32 mm)

Drain hole: 1-3/4" (44 mm)