


AXENT
SWITZERLAND



AXENT.ONE C PLUS
E314

INSTALLATION INSTRUCTIONS

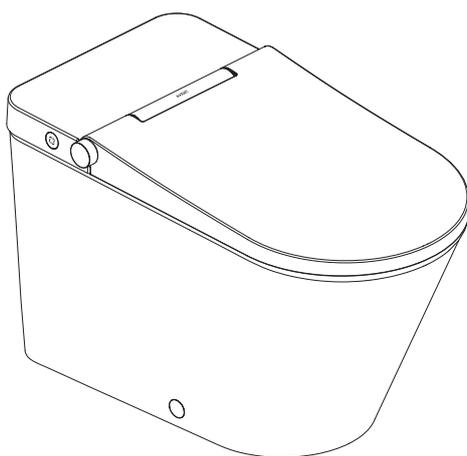

SAFETY SYMBOLS

The following warning signs warn you of dangerous situations and their severity:



DANGER!

High Risk, Lethal Hazards, Severe Injuries



WARNING!

Medium Risk, Severe Injuries



CAUTION!

Low Risk, Minor Injuries



NOTE!

Damage to Property

TARGET READERSHIP AND INSTALLER QUALIFICATIONS

Installation must be carried out by qualified professionals.
Repairs should only be performed by trained and qualified persons.



NOTE!

Follow all local installation regulations and country specific voltage and plumbing standards. DO NOT install the intelligent toilet in rooms where there is a danger of frost. The room temperature and water temperature must not be less than 4°C (39°F).

Condensation may form when the intelligent toilet is brought from a cold location to a warm one. Leave the unit switched off for a few hours before operating.



DANGER!

Risk of fatal electric shock

The appliance must be grounded and plugged into a GFCI outlet.
DO NOT remove individual components from (inside of) the intelligent toilet.
If the unit has a damaged cord or plug, return the product to a service center for repair. The cord or plug may only be changed by qualified personnel.



CAUTION!


DO NOT reuse old hoses. Please use new hoses and included components.
Axent Corp is not liable or responsible for damaged caused by 3rd party components

TECHNICAL SUPPORT


For any questions or any assistance with this product, please contact your dealer or call us at
1-800-769-4857
support@axentproducts.com
www.axentbath.us

SCOPE OF DELIVERY


Standard delivery contents

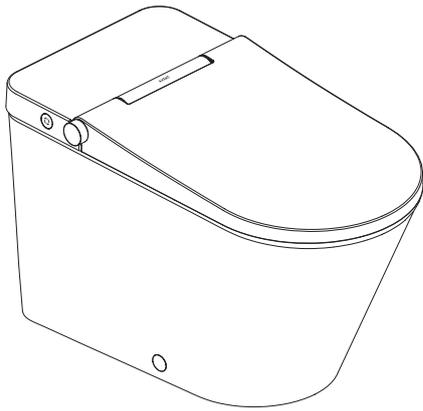

Main body




12" Base Flange




Remote Control



Adhesive




User Manual




Inlet Hose and Filter
(Filter Adapter Requires 1/2" FIP Connection.)



Bowl Mounting Hardware



Holder and Rubber plug



Installation Manual



Bowl Plug



Remote Control Mounting Hardware



Battery



Anti-theft Screws



The below parts are not included with the toilet.



Wax Ring




Bolts



Floor Mount


1

1/2" Nominal Pipe Thread (NPT)
 (Some 7/16" & 1/2" Slip-joint valve stops
 utilize 1/2" NPT. Verify mating connection
 with the included filter adapter first before
 installation)

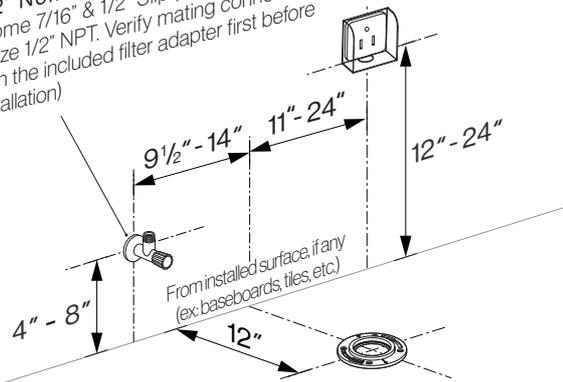


! Please verify these dimensions before beginning installation. These dimensions may vary in some locations. Recommended operating pressure 40 - 80 psi.

2




5~15sec

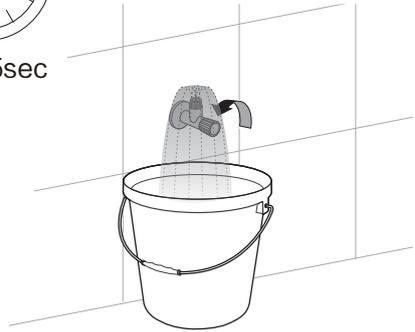


! Please run water until clear.


3

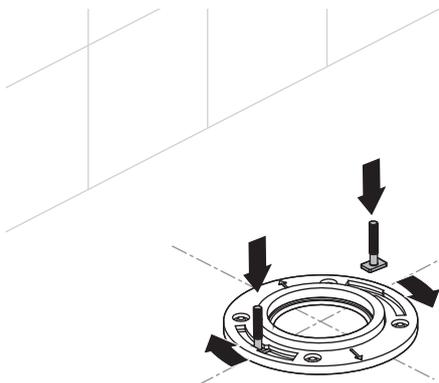


4

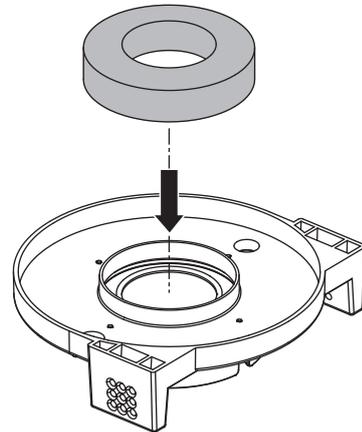

5

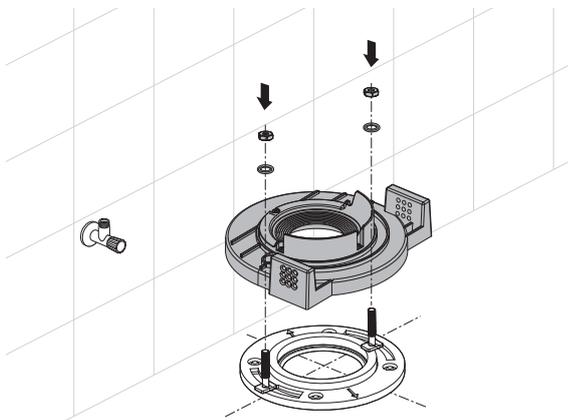


6

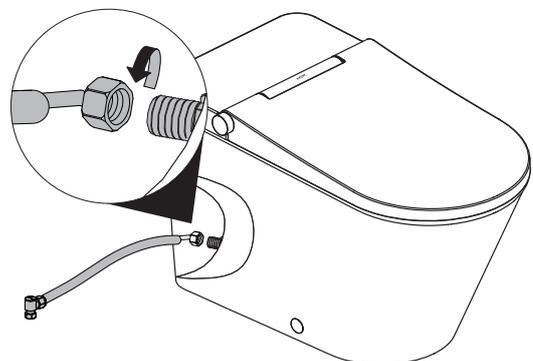


INSTALLATION


7

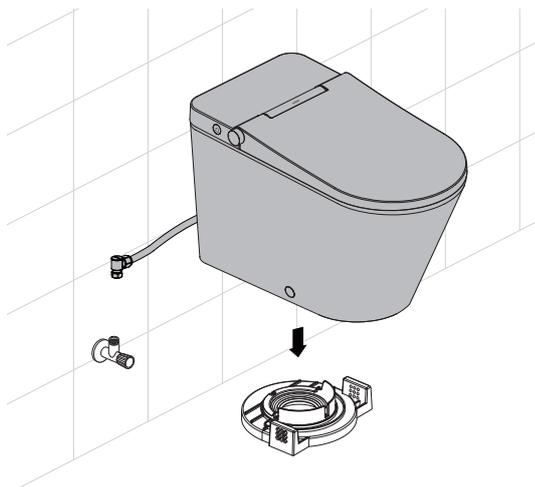


8

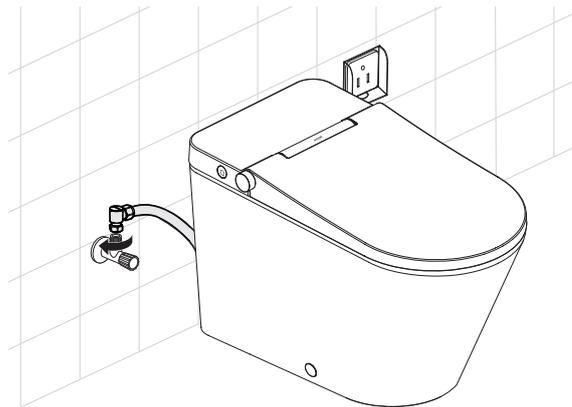

9

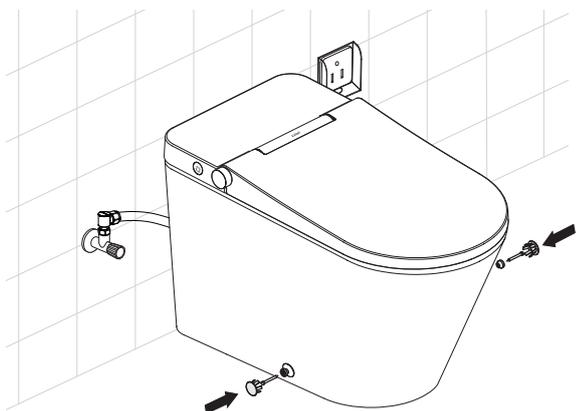


10

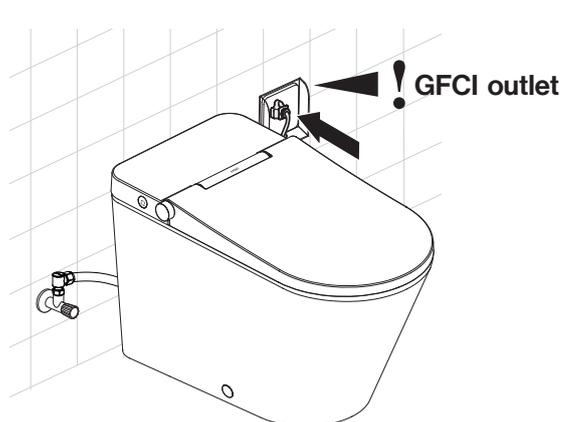



2

1


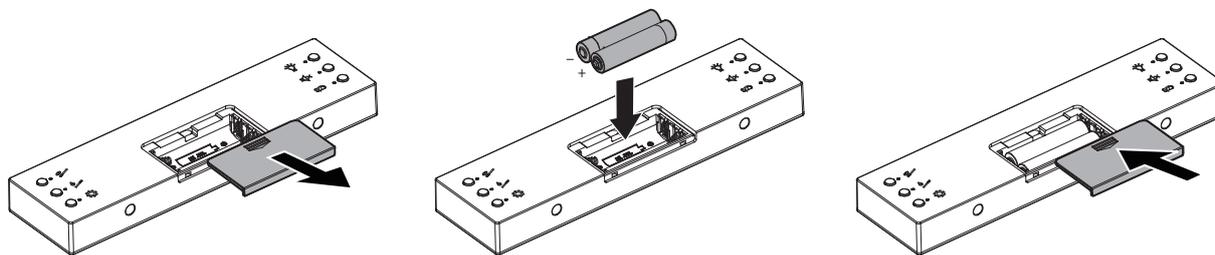


INSTALLATION


2




3

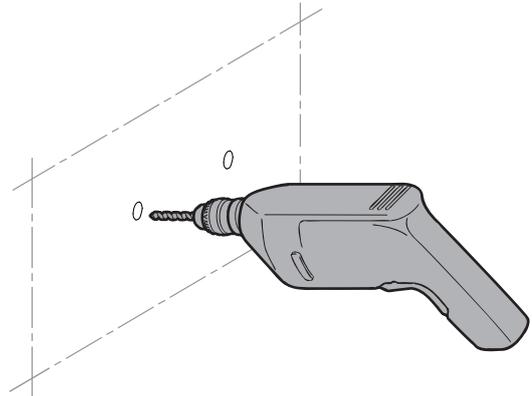


4




5




6

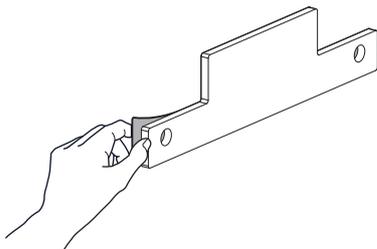


7

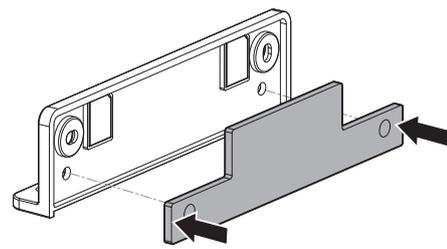

8




9

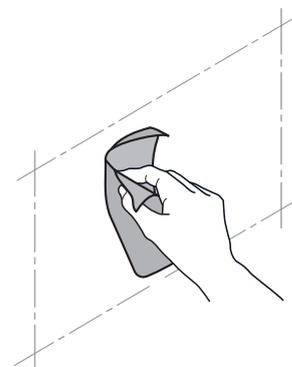


INSTALLATION

10




11



12



≥ 55 min




13




OPTIONAL


①

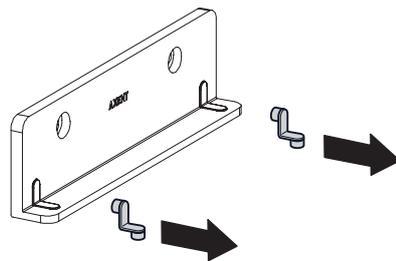


②

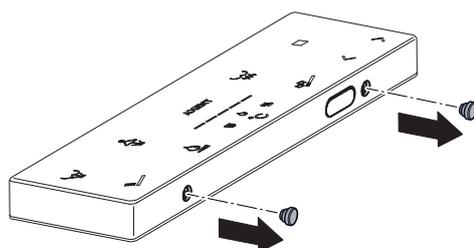

③



④



3

1




ON

2




ON

3

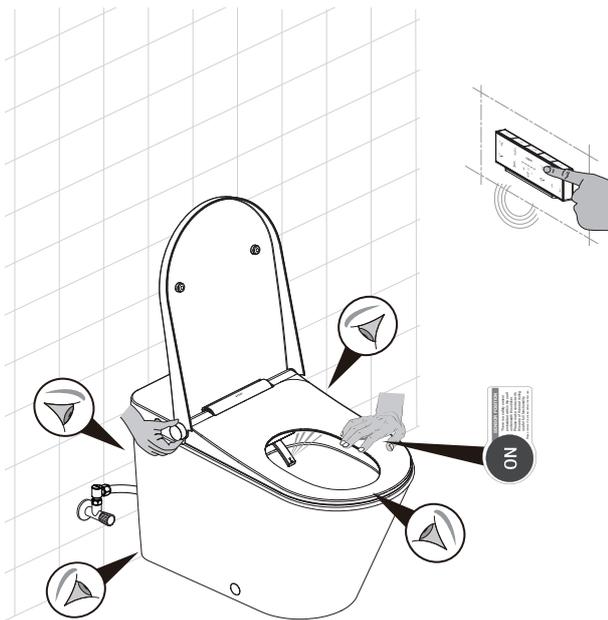


4

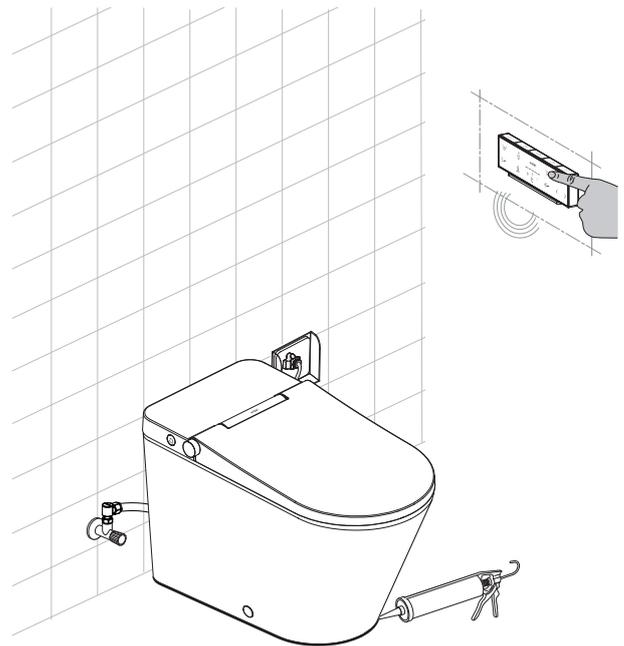

! Please check for leaks before caulking.

Place serial number sticker here
for reference:

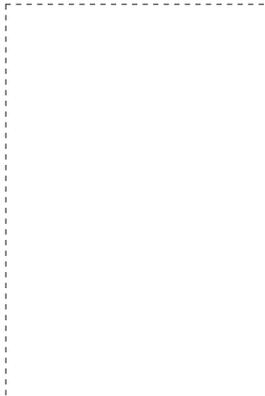

AXENT Corporation Ltd.

www.axentbath.us
support@axentproducts.com
1-800-769-4857