For Residential and Commercial Applications

Job Name	Engineer / Architect	
Job Location	Wholesaler	
Submittal Date	Contractor	

BRPX19V120H / BRPX19V160H / BRPX19V200H / BRPX19V300H Vinyl One-Piece Faucet Supply Kit — Barbed PEX Multi-Turn Angle Stop

Use: For use in potable water distribution systems in accessible locations only. Not intended for recirculating systems that produce continuous use temperatures above 115° F. For those applications, use our KTTM series ball stop.

Design Features:

- Everything you need. These kits combine our trusted BrassCraft® supply stop and vinyl water connector for an easy-to-install connection
- PEX end designed to ASTM F1807
- **For use with** ASTM F876 PEX tubing, in ASTM F877 water distribution systems using ASTM F1807, and/or F2098 connection methods

Vinyl connector provides:

- No kink hose. The specially engineered reinforced PVC hose provides unique flexibility to prevent kinking and crimping
- Strong and durable with a tighter weave and two-layer bonded construction, outperforms conventional vinyl connectors
- Rubber washers provide a large pliable sealing surface and ensure a long-lasting, water-tight connection
- 8-sided pneumatic crimp provides greater dependability for reliable nut-to-hose connections


Multi-turn stop provides:

- Machined, one-piece brass body provides strength, durability, and long-lasting performance
- Oval knurled handle provides a secure grip and smooth on/off operation
- Easy-to-remove handle with screw attachment helps protect against accidental stop operation during rough-ins

Operating Specifications:

Temperature: 40° - 160° F, intermittent to 180° F

Pressure: 125 PSI maximum **Tubing Diameter:** 0.300" ID (0.500" OD)

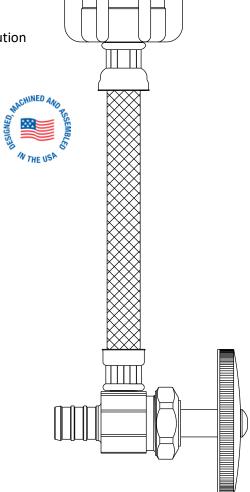

BRPX19V120H / BRPX19V160H / BRPX19V200H / BRPX19V300H Vinyl One-Piece Faucet Supply Kit — Barbed PEX Multi-Turn Angle Stop


CONNECTOR I	CONNECTOR MATERIAL SPECIFICATIONS	
Hose	Reinforced PVC	
Barb	Brass	
Ferrule	Steel, zinc plated	
Nut	Engineered Polymer	
Washer	Rubber	
O-ring	Rubber	

STOP MATERIAL SPECIFICATIONS		
Body	Brass, plated	
Stem	POM	
Bib & Packing Washer	Rubber	
Handle	Polycarbonate	
Handle Screw	Steel, zinc plated	
Packing Nut	Brass, plated	

Part Listing:

	BRPX19V160HX B	1/2" nom barb x 1/2" FIP x 16" length, chrome finish, bulk	
	BRPX19V200HX B	1/2" nom barb x 1/2" FIP x 20" length, chrome finish, bulk	
	BRPX19V300HX B	1/2" nom barb x 1/2" FIP x 30" length, chrome finish, bulk	

PART DIMENSIONS (Inches)			
Model	DIM. A	DIM. B	
BRPX19V160HX	16.50	2.62	
BRPX19V200HX	20.50	2.62	
BRPX19V300HX	30.50	2.62	

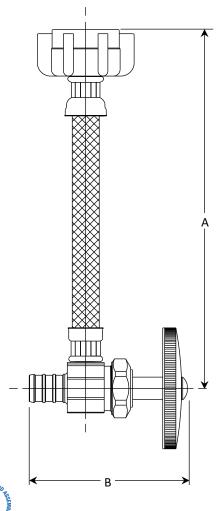

Listings & Certifications:

 IAPMO listed to ASME A112.18.1 / CSA B125.1 (includes NSF/ANSI372 and NSF61)





