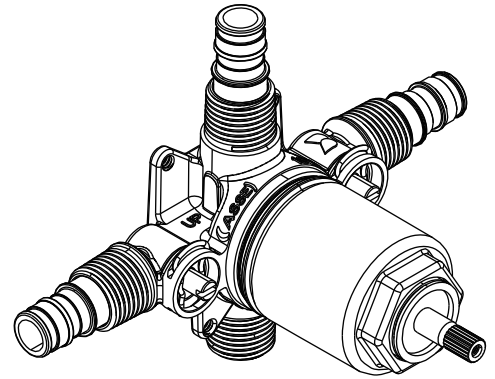


CFG

Pressure Balancing Tub/Shower Cycling In-Wall Valve

DESCRIPTION

- Brass construction
- 1/2" connection: Cold Expansion PEX
- Pressure balancing 4 port cycling valve
- Inlets - 1/2" CPEX adaptors, straight
- Shower outlet - 1/2" CPEX adaptors, straight
- Male IPS/CC tub outlet
- Valve comes completely assembled with nose cone, cartridge and plaster ground
- Six(6) individual boxes per master carton
- Do not use plastic pipe for tub drop
- 1/4" turn shut-off stops

OPERATION

- Pressure balancing mechanism maintains selected discharge temperature to $\pm 3.6^{\circ}\text{F}$
- For use with stud thicknesses 2-1/2" or greater

CARTRIDGE


- Ceramic disc technology
- Non-metallic, non-ferrous, and plastic material

STANDARDS

- Third party certified to ASME A112.18.1/CSA B125.1, ASSE 1016, and all applicable requirements referenced therein
- All CFG products are compliant to all plumbing codes that require 3rd party certification to the applicable plumbing/fitting standards

WARRANTY

- Ten(10) year limited warranty against defects in materials and manufacturing workmanship
- Refer to the installation instructions enclosed with each CFG product or call 1-888-450-5522 for complete warranty information.

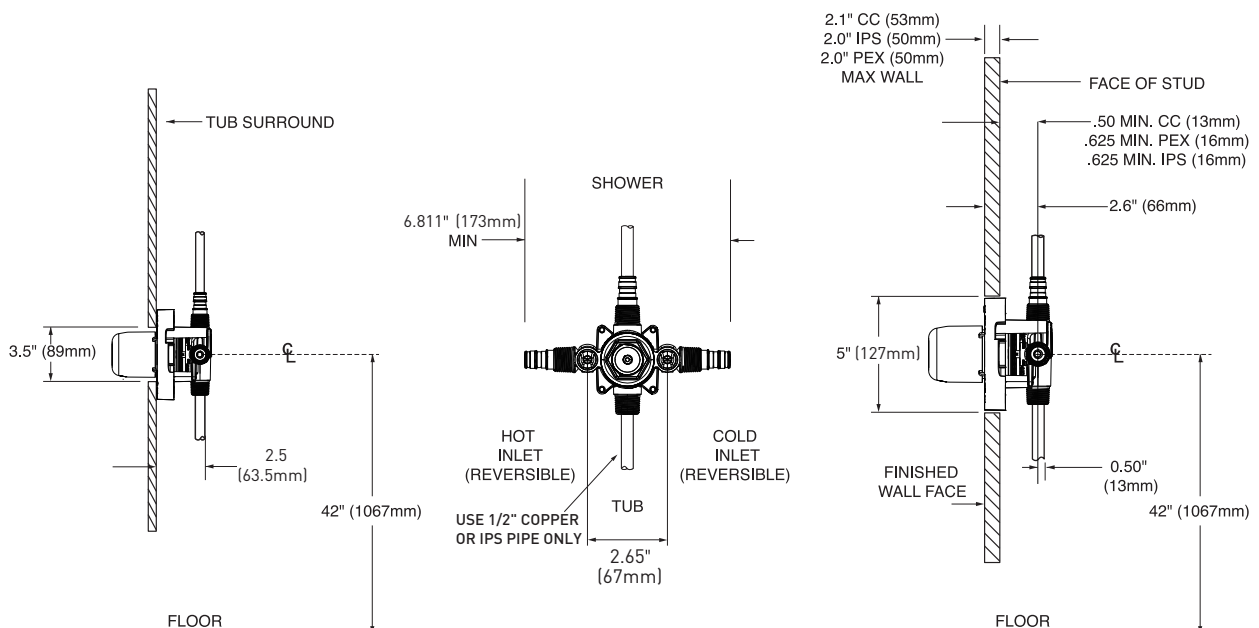

THIN WALL

THICK WALL