


570LF-WFHDF



Submitted Model No.: _____

Specific Features: _____

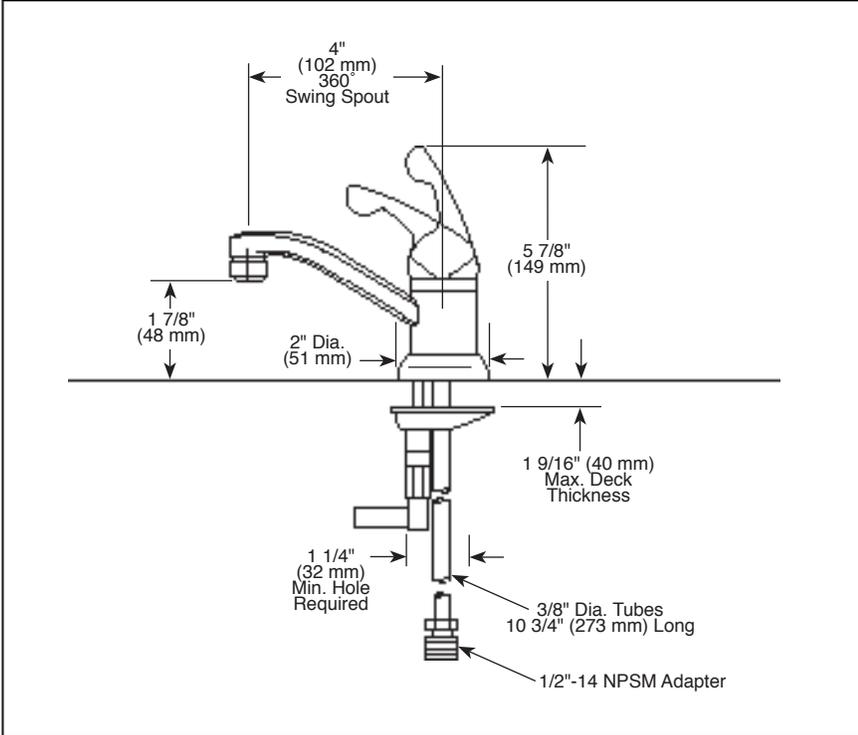

DELTA[®] COMMERCIAL

LAVATORY FAUCETS

■ Single Handle Deck Mount

STANDARD SPECIFICATIONS:

- Max. 1.20 gpm @ 60 psi, 4.54 L/min @ 414 kPa
- One hole mount
- Solid brass fabricated body
- Vandal resistant lever handle. Red/blue indicator markings
- Control mechanism shall be of the rotating stainless steel ball type with replaceable non-metallic seats operating in stainless steel lined sockets.
- Adjustable handle limit stop
- All operating parts shall be replaceable from the top
- Available Options for Field Conversion:
 - 6" (152 mm) Long Swing Spout. Order RP9633.
 - 8" (203 mm) Long Swing Spout. Order RP5654.
 - 6" (152 mm) Long Elbow Handle with Red/Blue Graphics to Indicate Hot/Cold Temperatures. Order RP5645.

WARRANTY

- Lifetime limited warranty on parts (other than electronic parts and batteries) and finishes: or, for commercial users, for 5 years from the date of purchase.
- 5 year limited warranty on electronic parts (other than batteries); or, for commercial users, for 1 year from the date of purchase. No warranty is provided on batteries.

COMPLIES WITH:

- ASME A112.18.1 / CSA B125.1



Indicates compliance to ICC/ANSI A117.1

- Verified compliant with .25% weighted average Pb content regulations.

Delta reserves the right (1) to make changes in specifications and materials, and (2) to change or discontinue models, both without notice or obligation. Dimensions are for reference only. See current full-line price book or www.deltafaucet.com for finish options and product availability.

DSP-L-570LF-WFHDF Rev. D



55 E. 111th Street, Indianapolis, Indiana 46280
350 South Edgeware Road, St. Thomas, Ontario Canada N5P 4L1
© 2016 Masco Corporation of Indiana