

Flush Valve for Washdown Urinals

Lever handle Back inlet supply flush valve for washdown urinal w/union inlet stop- brass oscillating lever handle -inlet cover tube -set screw wall flange

Model No: 86T505

COMPLIES WITH:

- IAPMO listed to ASSE 1037/ASME A112.1037/CSA B125.37
- Lever Handle Indicates compliance to ICC/ANSI A117.1
- (Contact Delta Representative for State and/or Local Approvals)





SPECIFICATION:

- Heavy Duty Cast Brass valve for 3/4" IP spud urinal
- Polished chrome plated finish
- Delta® slow close cartridge, factory set for 0.5 gallon (1.9 litres) flush
- 1/2" universal FIP/copper sweat inlet
- For Washdown Urinals
- Chrome plated union inlet stop
- Back inlet supply
- Brass oscillating lever handle, coupling nuts, inlet cover tube
- Set screw wall flange
- Spud flange and spud nut
- Outlet tube


OPERATION:

- INSTALLATION WARNING:
- Models supllied LESS vacuum breakers must be installed on fixtures providing suffucient air gap protection against backflow.

(Dimensional drawing on following page)

Delta reserves the right (1) to make changes to specifications and materials, and (2) to change or discontinue models, both without notice or obligation. Dimensions are for reference. Measurement may vary plus or minus 6mm(0.25"). Mounting locations are suggested only. Check with local codes for requirements in your area. This spec was produced April 13, 2021.



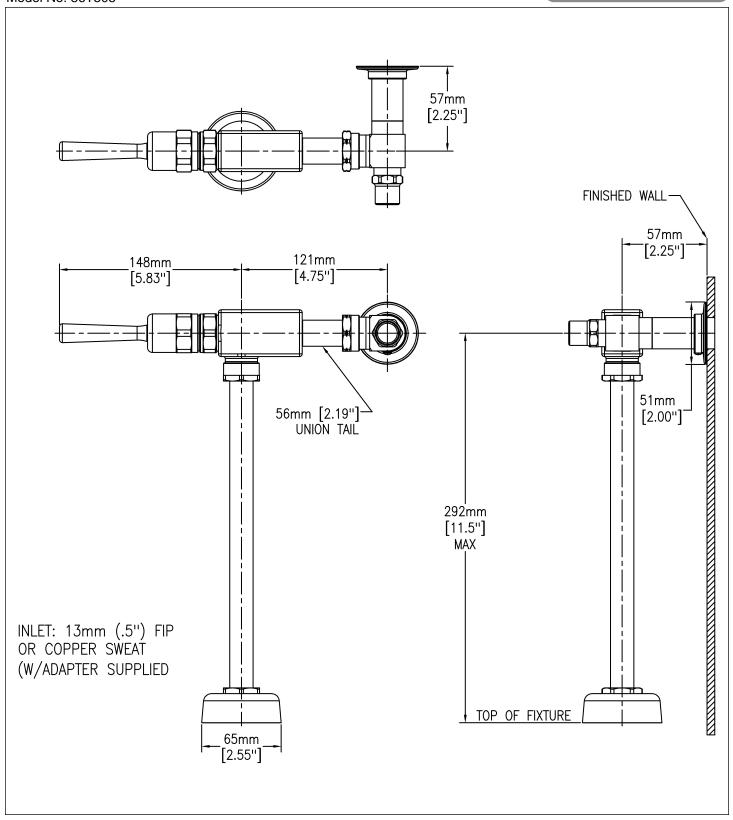

Delta reserves the right (1) to make changes to specifications and materials, and (2) to change or discontinue models, both without notice or obligation. Dimensions are for reference. Measurement may vary plus or minus 6mm(0.25"). Mounting locations are suggested only. Check with local codes for requirements in your area. This spec was produced April 13, 2021.