

INSTALLATION INSTRUCTIONS



DXV Modulus™ Bidet Model D25010 Series

Thank you for selecting DXV. To ensure this product is installed properly, please read these instructions carefully before you begin. (Certain installations may require professional help.) Also be sure your installation conforms to local codes.


⚠ CAUTION: PRODUCT IS FRAGILE. TO AVOID BREAKAGE AND POSSIBLE INJURY HANDLE WITH CARE!

NOTE: Pictures may not exactly define contour of china and components.


ALL INSTALLATION PROCEDURES MUST COMPLY IN STRICT ACCORDANCE WITH APPLICABLE LOCAL PLUMBING AND BUILDING CODES

RECOMMENDED TOOLS AND MATERIALS

Most of the procedures require the use of common tools and materials, which are available from hardware and plumbing supply stores. It is essential that the tools and materials be on hand before work has begun.

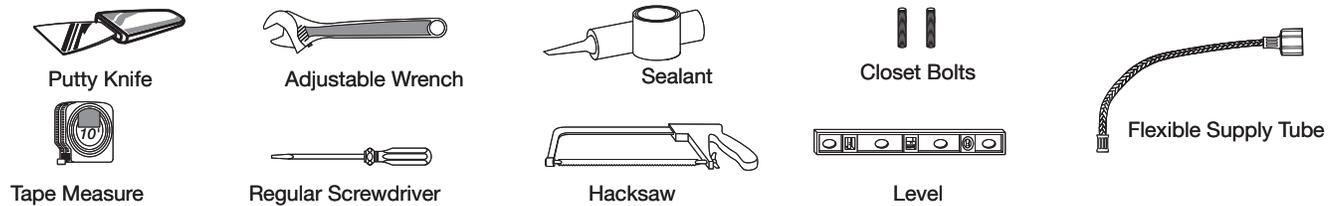

ROUGHING-IN DIMENSIONS: If a side by side toilet and bidet installation is desired, a comfortable separation of 2 feet (610 mm) is required between the units.

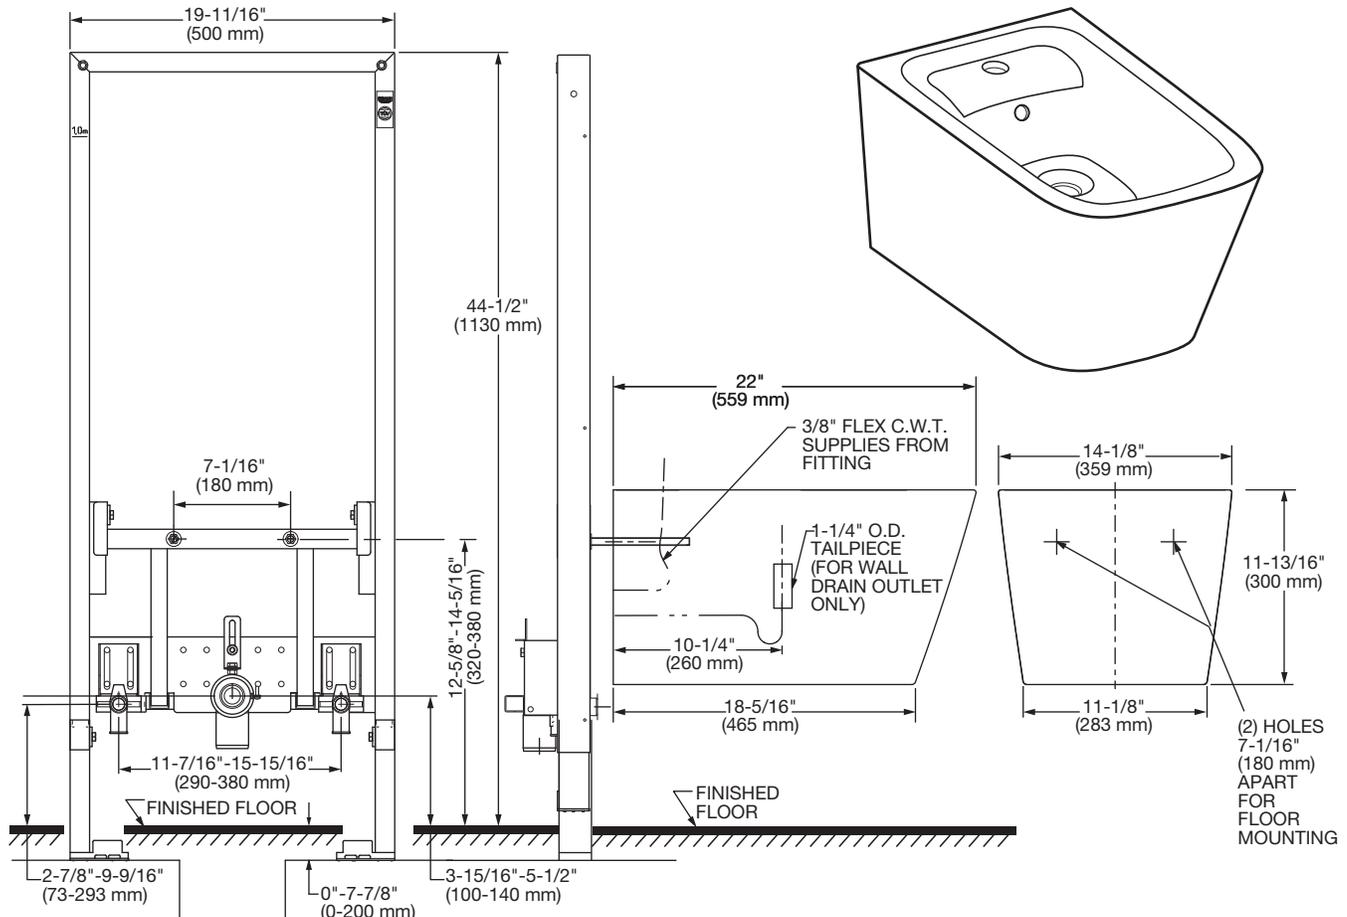

SAVE FOR FUTURE USE

REPLACEMENT USE:

When replacing an original unit be sure to shut off water supply before removing the unit or disconnecting water supply lines and drain fittings. Original supply lines and shutoff valves should be replaced and used with fittings and adapters to match the hookups on the replacement unit.

USE TEFLON SEALANT TAPE ON PIPE THREADS FOR WATERTIGHT CONNECTIONS!


INSTALLATION PROCEDURES:

Bidet installation includes: wall preparation and installation of internally mounted wall carrier system to mount bidet, (ref Bidet Rough-In and internal wall mounted Carrier installation instruction), installation of hot and cold water supply lines and shutoff valves; mounting bidet to wall mounted carrier; and connection to house water supply and drain.


Bidet Mounting Provisions – Bidets are usually installed adjacent to a toilet; if this is done, ensure at least 24" (610 mm) floor space be provided between fixtures. The bidet is installed via an internal, wall mounted carrier system. (ref Carrier installation instructions). Wall hung Bidet is mounted directly to internally wall mounted carrier system via 2 threaded rods and female threaded nuts. Also note when installing the Modulus bidet a specific faucet is required.

- 1 Refer to internally mounted wall carrier system instructions for installation of carrier system.
- 2 Install drain outlet. (Reference Carrier installation and Bidet Rough-In illustrations).
- 3 Install hot and cold water supplies to carrier unit (reference Carrier installation and Bidet Rough-In illustrations).


- 4 Remove protective plastic sleeves from threaded mounting rods. Install rods with a protruding length of 1-3/8" (35 mm) from the finished wall. Then fully install the female threaded nuts leaving approximately 3/8" (10 mm) of the threaded rod exposed. Also insure the concave portion of the nut is facing down.

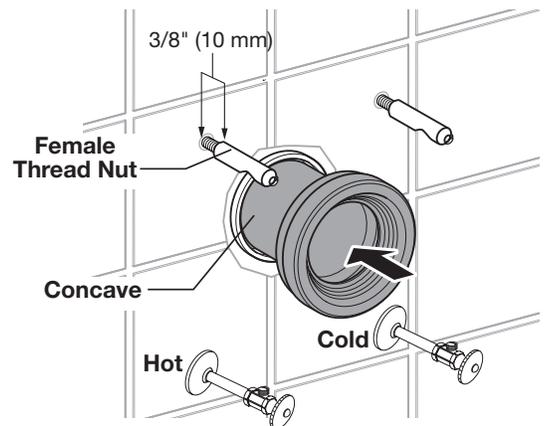

- 5 Ensure each of the pre-installed 4 fingered plastic mounts are securely mounted into each mounting hole of the bidet. Then install both bidet faucet and drain pipe.

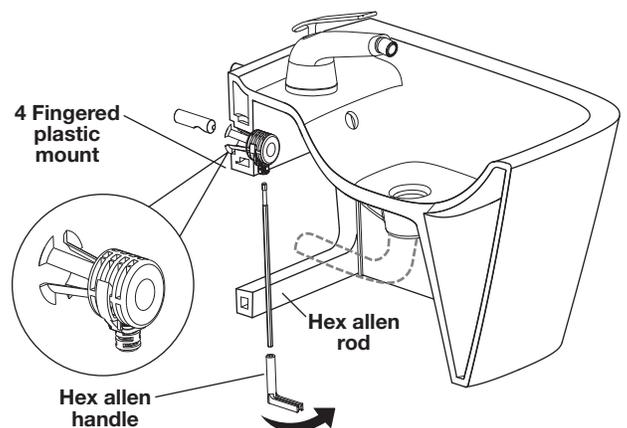


- 6** Move the bidet to the carrier, connect the hot and cold water lines. Place the bidet onto female threaded nuts and drain pipe of the carrier system. Carefully insert bidet so the threaded female nuts go into the plastic finger housings mounted in the bidet.

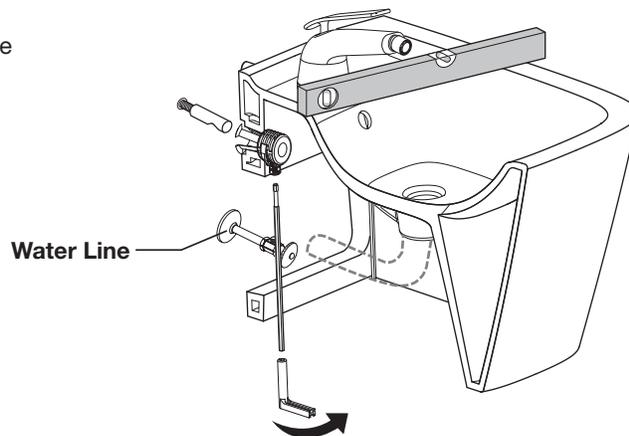

Once bidet is fully mounted into the female threaded nuts, turn the hex allen rod inserted into the plastic housing clockwise to tighten bidet into the finished wall.

- 7** Seal gap around bidet with waterproof sealant.

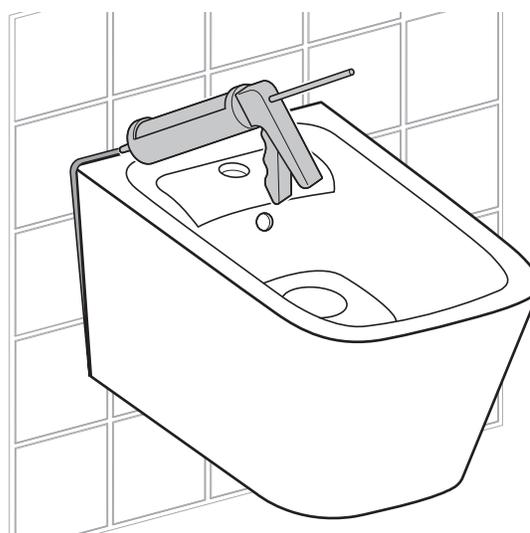

COMPONENT	DESCRIPTION
D25010001.415	Wall Hung Bidet
D35120012.XXX	Bidet Faucet
D29050044.000	Wall Hung Bidet Carrier

In the United States:

DXV
One Centennial Avenue
Piscataway, New Jersey 08855
Attention: Director of Customer Care

For residents of the United States, warranty information may also be obtained by calling the following toll free number: (800) 227-2734
www.DXV.com

In Canada:

DXV
5900 Avebury Road
Mississauga, Ontario
L5R 3M3
Canada

Toll Free: 1-800-387-0369
Local: 905-306-1093
Fax: 1-800-395-1498
www.DXV.ca

In Mexico:

DXV
Via Morelos 330
Col. Santa Clara Coatitla
Ecatepec, Estado de México 55540

Toll Free: 01-800-8391200
www.DXV.mx