

PRODUCT SPECIFICATIONS

Universal Vandal-Resistant 3000 Gal. Filtration Kit with Filter Status Monitor. Overall dimensions are 7-7/8" x 5-7/8" x 16-3/8". Made of Stainless Steel.

Special Features:	Vandal Resistant, Filtered, Visual Filter Monitor
Material:	Stainless Steel
Finish:	Stainless Steel
Dimensions:	7-7/8" x 5-7/8" x 16-3/8"
Shipping Weight:	8 lbs.
Flow Rate:	1.5 GPM (5.6 L/m)
Capacity:	
Temperature:	40-100°F (4-38°C)
Initial Pressure Drop:	2-5 PSI (14-34 kPa)
Maximum Pressure:	105 PSI (724 kPa)
Minimum Pressure:	20 PSI (138 kPa)
Water Inlet:	3/8" (9.5mm) O.D. tube
Water Outlet:	1/4" (6.4mm) O.D. tube

Special Note: Includes WaterSentry Filter. Order 51300C as a replacement filter.

- Filter is tested and certified to NSF/ANSI standards 42 and 53 for the reduction of PFOA and PFOS; two prevalent PFAS chemicals, lead, Class 1 particulates, cysts and chlorine taste and odor
- Filter is tested and certified to NSF/ANSI 401 for the reduction of microplastics.
- Filter should be replaced every 2,250 gallons; expires 1 year after installation
- Vandal-resistant enclosure made from 20-gauge stainless steel to protect filter and discourage tampering; Torx bit included for added security
- Versatile mounting near accessible water line; box includes conduit punchouts on sides and bottom and an open back for thru-wall plumbing; vandal-resistant conduit not provided
- Universal box works with Elkay and non-Elkay units to turn any non-filtered cooler or fountain into a filtered unit
- LED filter status monitor and audio alert indicate when filter replacement is needed



Included with Product: WaterSentry Filter, Filter Status Monitor, 20-Gauge stainless steel mounting box

A Century of Tradition and Quality. For more than 100 years, Elkay has been making innovative products and providing exceptional customer care. We take pride in offering plumbing products that make life easier, inspire change and leave the world a better place.




Product Compliance: NSF 61 (Q≤1)
NSF 372 (lead free)
NSF 42
NSF 53
NSF 401



[Installation Instructions \(PDF\) - 2000001249](#)
[Warranty \(PDF\)](#)

PART: _____ QTY: _____
PROJECT: _____
CONTACT: _____
DATE: _____
NOTES: _____
APPROVAL: _____

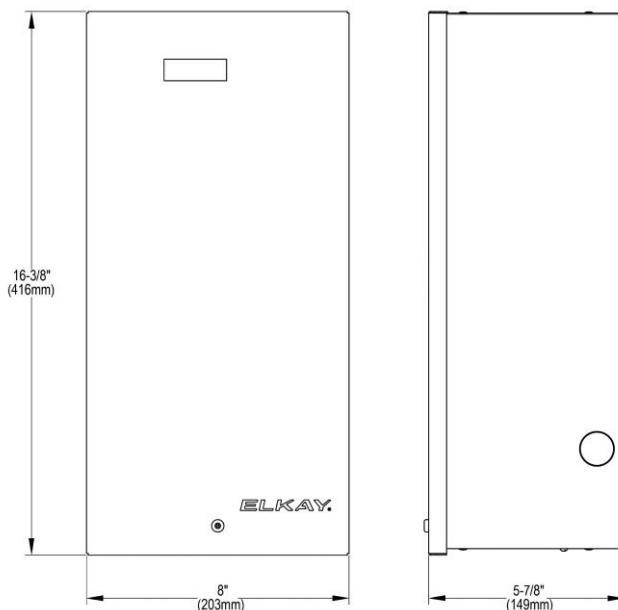

In keeping with our policy of continuing product improvement, Elkay reserves the right to change product specifications without notice. Please visit elkay.com for the most current version of Elkay product specification sheets. This specification describes an Elkay product with design, quality, and functional benefits to the user. When making a comparison of other producers' offerings, be certain these features are not overlooked.