

Talis N
HighArc Kitchen Faucet, O-Style 2-Spray Pull-Down with sBox, 1.75 GPM
 Finish: **polished nickel** Part no. : **72801831**



Description


Features

- Consists of: Single lever kitchen mixer, hose box
- Swivel range adjustable in 4 steps 60°, 110°, 150° or 360°
- Aerated spray, needle spray, Shower spray pattern
- Toggle spray diverter
- MagFit magnetic sprayhead docking
- Deck mounted
- Max. flow: 1.75 GPM (6.6 L/Min)
- Ceramic cartridge
- 3/8" connections
- Integrated double backflow prevention
- SBox for smooth, protected hose guidance in the cabinet
- Extension length up to 30" (76cm)
- Single lever kitchen mixer, connection hoses, Fastening set, Assembly instructions

Item details

List Price \$ 974.00

Technology

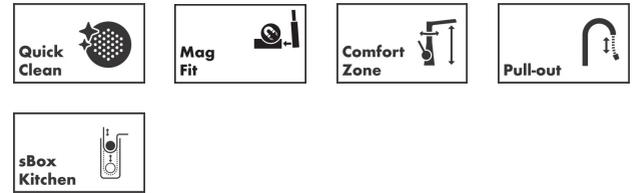


Compliance / Sustainability



Product image



Scale drawing

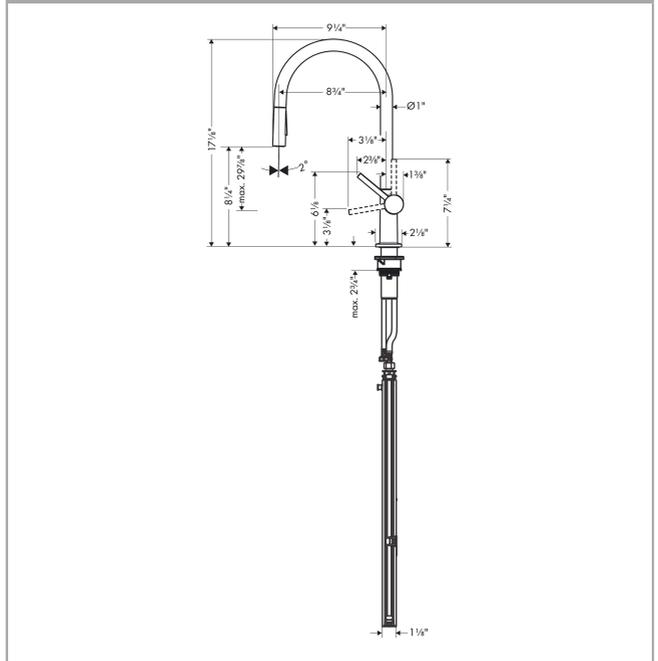


Talis N
HighArc Kitchen Faucet, O-Style 2-Spray Pull-Down with sBox, 1.75 GPM
 Finish: **polished nickel** Part no. : **72801831**



Exploded drawing

Year of production: >06/20

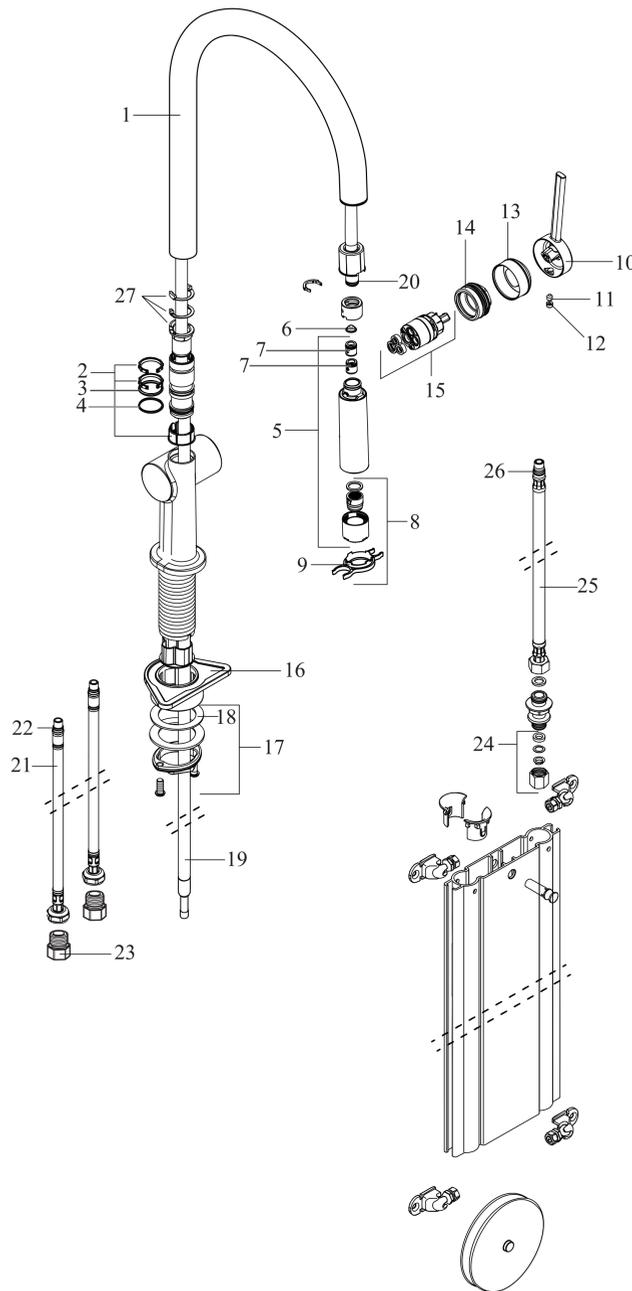

Talis N

HighArc Kitchen Faucet, O-Style 2-Spray Pull-Down with sBox, 1.75 GPM

Finish: polished nickel Part no. : 72801831



Spare parts list

Year of production: >06/20

Pos.	Description	Part no.	Price	PU
1	spout cpl.	93739830	-	1
2	set of lever collars	98365000	-	1
3	O-ring 19x2	98426000	-	1
4	O-ring 20x1,5	98197000	-	1
5	handspray	93741831	-	1
6	filter	98516000	-	1
7	non return valve DW 10	96456000	-	1
8	spray former	93342001	-	1
9	service tool	95910000	-	1
10	handle	93736830	-	1
11	flange	93737830	-	1
12	hollow set screw M5x5	98446000	-	1
13	screw cover	93735610	-	1
14	nut	93738000	-	1
15	cartridge, assy	93740000	-	1
16	support	97523000	-	1
17	fixing set (Ø 34)	95049000	-	1
18	lever collar	97548000	-	1
19	hose	93754000	-	1
20	O-ring 8x2	98112000	-	1
21	connection hose 900 mm M8x0,75 G3/8	93746000	-	1
22	O-ring 6,6x1,6	93019000	-	1
23	adapter for connection hose	88802000	-	1
24	squeezing connection	96099000	-	1
25	connection hose 450 mm M8x0,75 G3/8	97206000	-	1
26	O-ring 7x1,5	98422000	-	1
27	set of locating rings (60° / 110° / 150°)	94911000	-	1
a	extension set	43333000	-	1