


# JSL-46-AC / JSL-46-B

# **FAUCET GROUP**

BACKSPLASH MOUNT - SENSOR FAUCET AC or BATTERY POWER



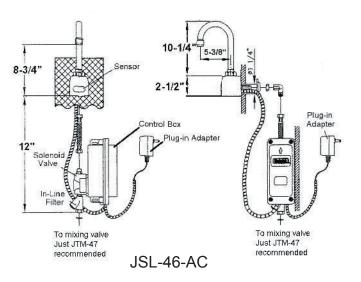

# **TECHNICAL DATA**

## **CONSTRUCTION:**

Single hole backsplash mount - non-mixing Sensor range - 6" - 30" - Preset/Adjustable Automatic time-out -

Preset/adjustable to 0, 15, 30 or 60 sec.

Shut-off delay - Preset - Adjustable 1 to to 8 sec.

In-line filter with clean-out trap

Slow closing, piston operated solenoid

Control circuit- Solid state, AC or Battery (field switchable)

Solenoid valve - VSI silicone elastomer piston seal

6V DC, normally closed .4W (idle), 5W (in use)

Operating pressure - 5psi to 125 psi

	APPROVED FOR MANUFACTURING	
MODEL NO.:		_QTY:
JOB NAME:		
TAG/ITEM:		
CUSTOMER:		
SIGNATURE:		

Control module- wall mountable

Control/power cable - armored, vandal resistantAC Mode

- Power Adapter (UL/CSA)

Standard plug-in: Input AC 120V 60Hz or 220V

Output DC 12V. 0.8A/Class 2

Armored, vandal resistant

Power cable: Battery Mode - (UL/CSA)

Batteries - uses (4) AA Alkaline batteries

Battery Life - 400,000 on/off cycles, up to 4yrs

### **FLOW RATE**

1.5 GPM Laminar Flow Control

#### **FINISH**

Chrome plated

### **OPTIONS**

Multi-unit adapter - serves up to (8) faucets Input AC 120V, Output DC 12V, 3A

JUST MFG. COMPANY CONTINUES TO MAKE QUALITY AND FUNCTIONALITY A MARK OF THE JUST PRODUCT LINE. WE RESERVE THE RIGHT TO CHANGE PRODUCT INFORMATION WITHOUT NOTICE. DIMENSIONS MAY CHANGE AND MAY BE SUBJECT TO CHANGE WITHOUT NOTICE. NO RESPONSIBILITY IS ASSUMED FOR USE OF SUPERCEDED OR VOIDED DATA. JUST MFG. CO. SINKS ARE MADE IN THE U.S.A. WHEN COMPARING OTHER BRAND PRODUCTS, BE SURE TO COMPARE USA QUALITY ALONG WITH FEATURES AND DIMENSIONS.

JUST MANUFACTURING COMPANY		9233 KING STREET . FRANKLIN PARK . ILLINOIS . 60131-2111
PH: 847-678-5150 . FAX: 847-678-6817		E-MAIL: custserv@justmfg.com . www.justmfg.com