



ASSEMBLY & INSTALLATION INSTRUCTIONS

MODEL: 505054
PALISADE 6 LIGHT CHANDELIER

I M A G E



If you have any questions or problems assembling your fixture please call us for assistance.

Customer Service: (702) 361-4345 or (800) 525-2655

customer.services@kalco.com

WARNING! TO REDUCE THE RISK OF FIRE OR INJURY PLEASE TAKE PRECAUTION AND FOLLOW THE STEPS BELOW.

1. If you are unfamiliar with electrical wiring, call a qualified electrician to install this unit. More than one person may be necessary to install fixture, make sure you have enough qualified help.
2. Turn off the power to the fixture's circuit at the service panel. Use a voltage detector to verify that the power is off.
3. DO NOT install bulb which exceeds the maximum wattage specified on the socket label.

Si vous avez des questions ou des problèmes assemblage de votre dispositif s'il vous plait appel pour l'assistance.


Customer Service: (702) 361-4345 or (800) 525-2655

customer.services@kalco.com

AVERTISSEMENT! POUR RÉDUIRE LES RISQUES D'INCENDIE OU DE BLESSURES S'IL VOUS PLAÎT PRENDRE DES PRÉCAUTIONS ET SUIVEZ LES ÉTAPES CI-DESSOUS.

1. Si vous n'êtes pas familier avec le câblage électrique, appelez un électricien qualifié pour installer cet appareil. Plus d'une personne peut être nécessaire d'installer appareil, assurez vous que vous disposez de l'aide assez qualifié.
2. Coupez l'alimentation au circuit de l'appareil sur le tableau de service. Utiliser un détecteur de tension pour vérifier que l'alimentation est coupée
3. NE PAS installer l'ampoule qui excède la puissance maximale indiquée sur l'étiquette du socket.


WIRING DIAGRAM

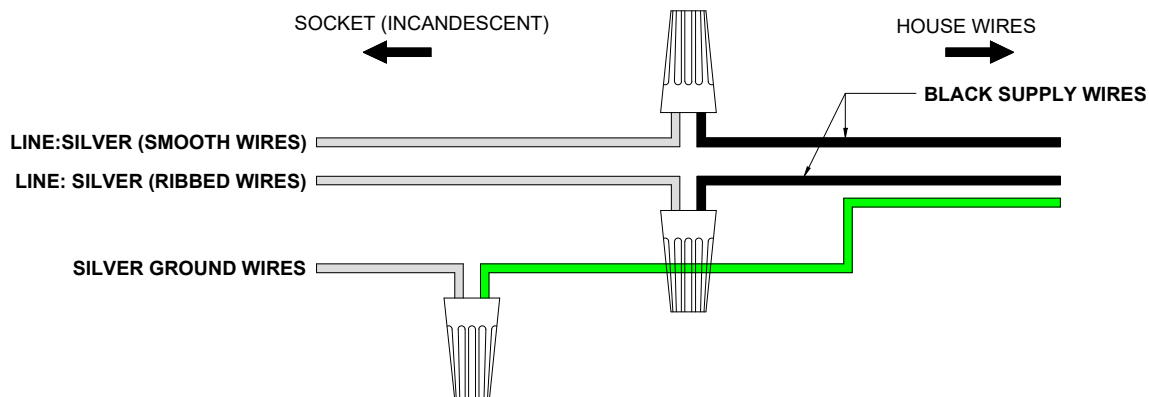

ASSEMBLY & INSTALLATION INSTRUCTIONS

MODEL: 505054
PALISADE 6 LIGHT CHANDELIER

KNOCK DOWN ASSEMBLY

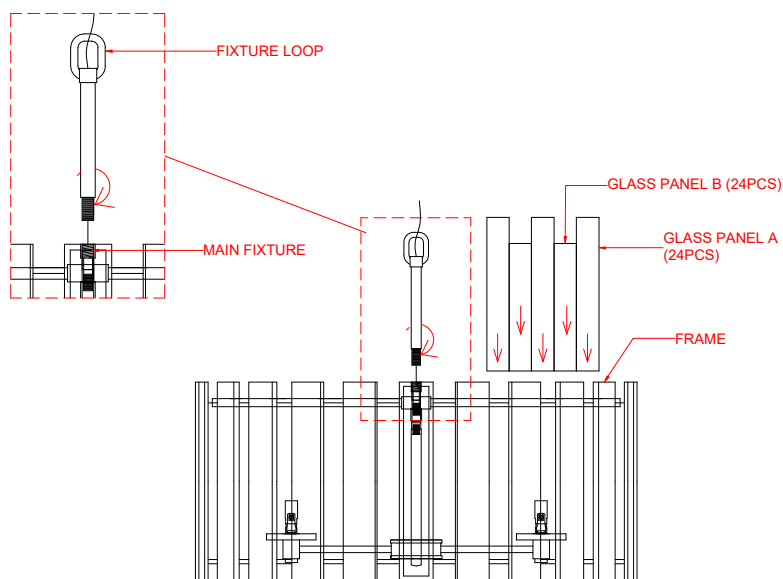

- STEP 1:** Carefully remove all parts from the box and lay them on a soft clean surface. Check to ensure no parts are missing.
- STEP 2:** Carefully attach the fixture loop to the main fixture as shown.
- STEP 3:** Insert all the glass panel to the main fixture frame as shown.

FOR LIGHTING MAINTENANCE:

- Regular cleaning of fixture with proper and gentle care using a soft duster, soft lint-free or damp cloth is recommended.
- Refrain from using harsh cleaning liquids that may cause chemical reaction on the hand painted finishes.
- Always refer to the Assembly Instruction before removing any components.
- **HANDLE WITH CARE.**




ASSEMBLY & INSTALLATION INSTRUCTIONS

MODEL: 505054
PALISADE 6 LIGHT CHANDELIER

ELECTRICAL / MOUNTING INSTALLATION

- STEP 4:** Assemble the **Mounting Plate** with the **Threaded Nipple, Star Washer and Hex nuts**. Attach the **collar loop** and remove the **Collar Loop Ring**.
- STEP 5:** Install the mounting assembly to the **j-box** using (2) **8-32" x 3/4" Screws (provided by others)**. Place the **canopy** onto the assembly. The face of the **canopy** should be located at about the center of the threaded section.
- STEP 6:** After determine the **canopy** height remove the **swivel ring** and **canopy**. Tighten the bottom **hex nut** to lock the position of the **Swivel** and tighten the top **hex nut** to lock the position of the **Mounting Plate**.
- STEP 7:** Unscrew the **screw(A) (provided by other)** to remove the mounting plate and lock the position of **collar loop** and **mounting plate** using the (2) **nut** provided.
- STEP 8:** Determine fixture height. Make adjustment if needed. Attach the **chain** to **fixture loop** using **quick link**.
- STEP 9:** Insert the **collar loop ring** and **canopy** to the chain.
- STEP 10:** Lace the wires through the **chain** (every other link).
- STEP 11:** Attached the end chain to the **quick link chain with collar loop**.
- STEP 12:** Pull ends of wire through center hole of **collar loop** and out the openings of the **Mounting Plate**. determine the wire length needed and cut all excess wires.
- STEP 13:** Refer to wiring diagram. With wire carefully threaded though **canopy**, connect the **black color (smooth) supply wire** to the **silver color fixture smooth wire** with wire connector, connect the **Black color (ribbed) supply wire** to the **fleet silver color fixture ribbed wire** with wire connector. Connect **ground wire** from fixture with **supply ground wire**.
- STEP 14:** Carefully tuck in all wires and raise the **canopy** to the junction box.
- STEP 15:** Secure the **canopy** with **collar loop ring**.
- STEP 16:** Insert the **Glass Panel** to the **glass holder**.
- STEP 17:** Insert the (6) **Candle Cover** to the (6) **E12 socket**.
- STEP 18:** Install the (6) **E12 Bulb**, Do not install bulb that exceed 60 watts.

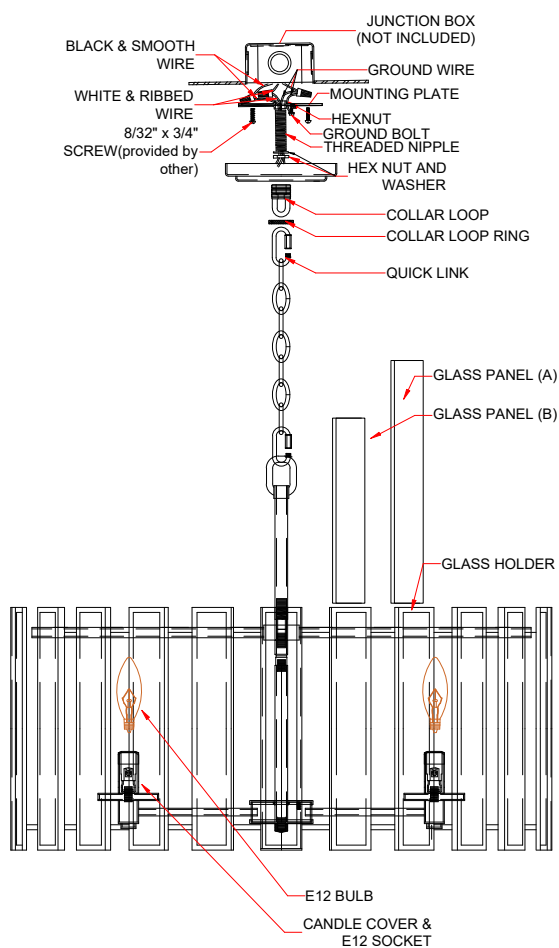



ASSEMBLY & INSTALLATION INSTRUCTIONS

MODEL: 505054
PALISADE 6 LIGHT CHANDELIER

PARTS LIST

PART NO.	PARTS NAME	IMAGE/DRAWING	QTY
KS-A-56	Mounting Plate (1/4IP THREAD)		1 pc
	Hex Nut (1/4IP THREAD)		2 pcs
	Washer (1/4 IP)		2 pcs
	Threaded Nipple Short 1/4IP THREAD (1/2" Ø X 2 1/2" L.)		1 pc
	Strain Relief (1/8 IP)		2 pcs
KS-A-250	Collar Loop & Collar Loop Ring (Gauge 7)		1 pc
LS-A-318	QUICK LINK (Gauge 7)		2 pcs
LS-A-43	CHAIN (OVAL SHAPE CHAIN GAUGE 7 X 4 FT.)		1 pc
	Canopy (6 1/2" Ø X 3/4" HT X 1" Ø CENTER HOLE)		1 pc
LS-A-137	Candle Cover 7/8 IN. DIA. X 2-1/8 IN. HT.		6 pcs
PC-G-457	Glass Panel 11-3/4 IN. X 1-11/16 IN. X 3/16 IN. THK CLEAR GLASS PANEL		24 pcs
PC-G-458	Glass Panel 9-1/2 IN. X 1-11/16 IN. X 3/16 IN. THK CLEAR GLASS PANEL		24 pcs