



# Wellworth® | K-3977

Two-piece round-front toilet, 1.6 gpf

## Features

- Two-piece design
- Round-front bowl offers an ideal solution for smaller bathrooms and powder rooms
- Left-hand Polished Chrome trip lever
- Combination consists of toilet bowl and tank
- Coordinates with other products in the Wellworth collection
- KOHLER's canister flush valve harnesses the natural force of gravity and optimizes flushing performance
- 1.6 gpf (6.0 lpf)
- 2-1/8" (54 mm) fully glazed trapway
- Class Five® canister optimizes the flow out of the tank, harnessing gravity and the natural, powerful reducing cascade of water to increase the power and effectiveness of the flush



## Available Colors/Finishes

*Color tiles intended for reference only.*

- |    |             |
|----|-------------|
| 0  | White       |
| 96 | Biscuit     |
| 7  | Black Black |



1-800-4KOHLER (1-800-456-4537)

Kohler Co. reserves the right to make revisions without notice to product specifications.

For the most current specification sheet, go to [www.kohler.com](http://www.kohler.com) USA or [www.kohler.ca](http://www.kohler.ca) Canada.

7-06-2026 22:08 - US-CA

THE BOLD LOOK  
OF **KOHLER**

## Codes/Standards

*Accessibility standards may require controls to be located on the open side of the toilet.*

*Plumbing codes may require elongated toilets and elongated, open-front seats in public bathrooms.*

ASME A112.19.2/CSA B45.1  
DOE - Energy Policy Act 1992

## Warranty

See website for detailed warranty information.

KOHLER® Toilets and Seats Limited Warranty

## Technical Information

|                       |                                    |
|-----------------------|------------------------------------|
| Rough-in:             | Standard 12" (305mm)               |
| Flush Type:           | Class Five                         |
| Flush Rate:           | 1.6 gpf (6 lpf)                    |
| Bowl Shape:           | Round-front                        |
| Seat-Mounting Holes:  | 5-1/2" (140 mm)                    |
| Waste Outlet:         | Floor                              |
| Trapway Size:         | 2-1/8" (54 mm)                     |
| Trapway Type:         | Exposed                            |
| Water Surface Size:   | 10-1/2" x 7-3/4" (267 mm x 197 mm) |
| Rim to Water Surface: | 5-1/4" (133 mm)                    |

## Included Combo Skus

- K-4197 Round-front toilet bowl
- K-4468 Toilet tank, 1.6 gpf

## Recommended Products/Accessories

1023457 Toilet Wax Ring And Hardware Kit

1265114 12" Toilet Supply Line


K-23726 Drain treatment

K-9379 Trip lever

K-5420 Low-profile toilet bolt caps

K-4639-RL ReadyLatch® Quiet-Close™ round-front toilet seat



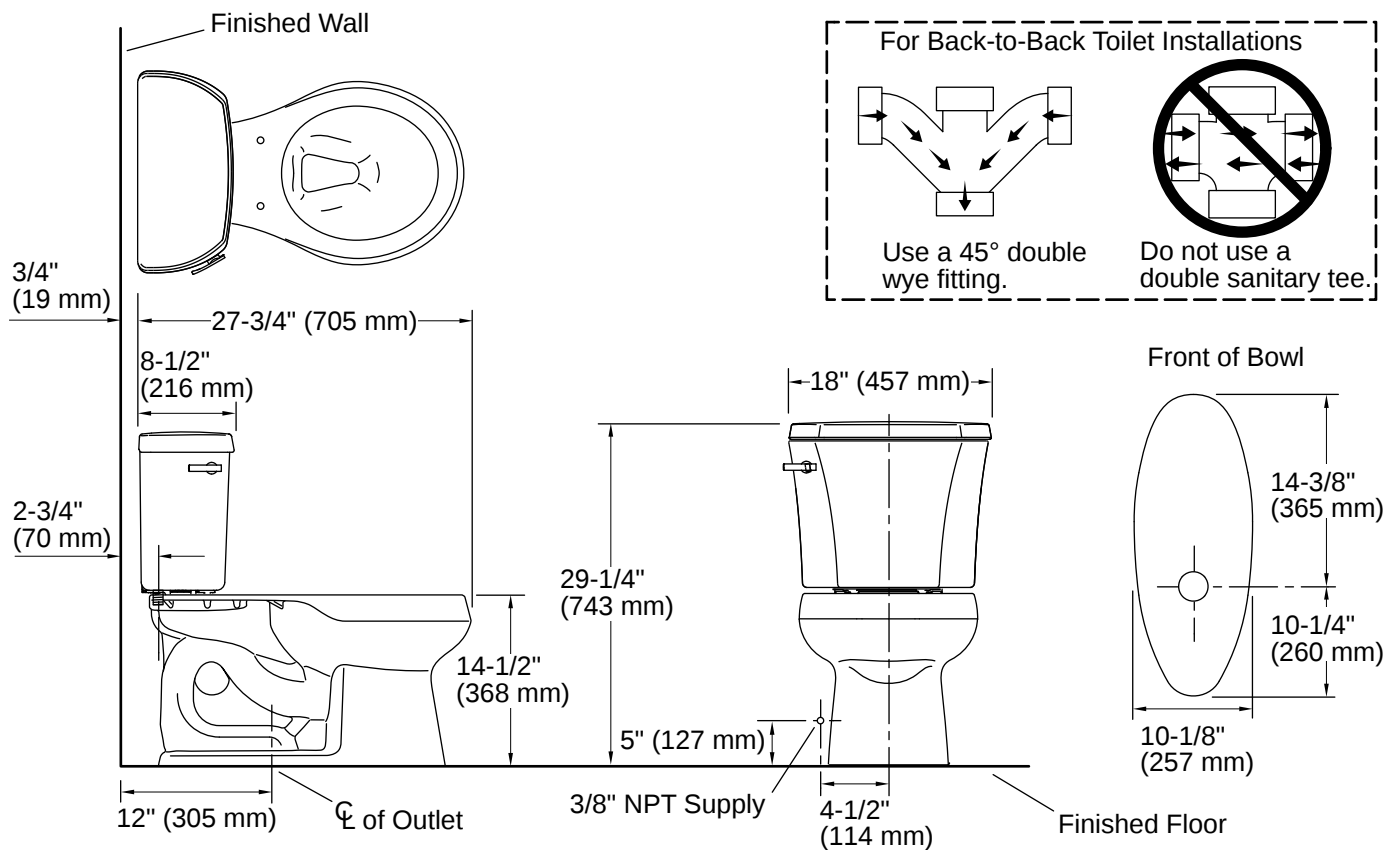

## Installation

- Standard 12" (305 mm) rough-in
- Three-bolt quick-connect installation
- Seat and supply line sold separately

## Installation Notes

*Install this product according to the installation instructions.*

For back-to-back toilet installations: Use only a 45° double wye fitting.

Product dimensions are nominal and may vary per ASME A112.19.2 tolerances.



1-800-4KOHLER (1-800-456-4537)

Kohler Co. reserves the right to make revisions without notice to product specifications.

For the most current specification sheet, go to [www.kohler.com](http://www.kohler.com) USA or [www.kohler.ca](http://www.kohler.ca) Canada.

7-06-2026 22:08 - US-CA