

Highline® Curve Comfort Height®

The Complete Solution® round-front 1.28 gpf toilet K-30369

Features

- Two-piece toilet.
- Round-front bowl offers an ideal solution for smaller baths and powder rooms.
- Comfort Height® feature offers chair-height seating that makes sitting down and standing up easier for most adults.
- 1.28 gallons per flush (gpf).
- Standard left-hand Polished Chrome trip lever included.
- Complete Solution® toilets provide everything you need in one box, including bowl, tank, seat, wax ring and floor hardware.

Technology

- Single-flush gravity uses the force of gravity and a precision-engineered tank, bowl, and trapway to create a strong siphon during flushing.
- Class Five® flushing technology offers virtually plug-free performance and rinsing power for a clean bowl.

Installation

- Standard 12" rough-in.
- Three-bolt installation.
- Supply line not included.

Required Products/Accessories

K-75758 Cachet® Nightlight Quiet-Close™ Round-Front Toilet Seat

or

K-5589 Purefresh® Round-Front Toilet Seat

or

K-75796 Cachet® Nightlight Quiet-Close™ Elongated Toilet Seat

or

K-5588 Purefresh® Elongated Toilet Seat

Recommended Products/Accessories

K-23726 Drain treatment

K-23734 Toilet bowl cleaner & disinfectant


K-23724 Toilet cleaner & disinfectant

Included Components

Additional Components:

Polished Chrome trip lever





Codes/Standards

ASME A112.19.2/CSA B45.1 DOE - Energy Policy Act 1992 EPA WaterSense® California Energy Commission (CEC) ADA ICC/ANSI A117.1 CSA B651 OBC

KOHLER® Toilets and Seats Limited Warranty

See website for detailed warranty information.

Available Colors/Finishes

Color tiles intended for reference only.

Color Code Description


) White



KOHLER

Highline® Curve Comfort Height®

The Complete Solution® round-front 1.28 gpf toilet K-30369

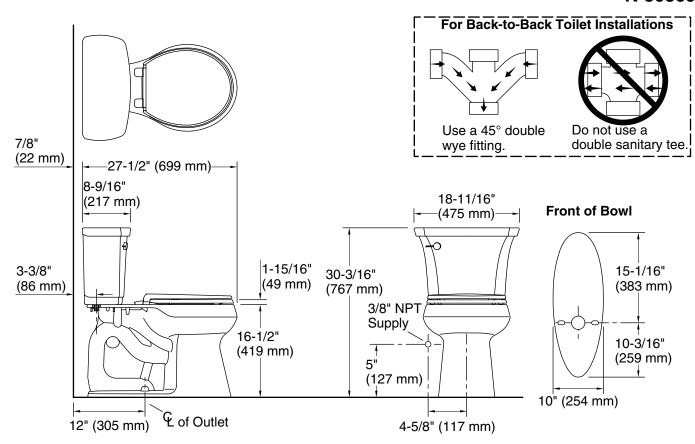

Technical Information

All product dimensions are nominal.

Toilet type: Two-piece, Floor-mount

Waste Outlet: Floor

Bowl shape: Round-front
Flush type: Class Five®
Trap passageway: 2-1/8" (54 mm)

Water Consumption

Full: 1.28 gpf (4.8 lpf)

Water surface size: 10-1/2" x 8-1/4" (267 mm x 210 mm)

Rim to water surface: 5-3/8" (137 mm) Rough-in: 12" (305 mm)

Notes

Install this product according to the installation instructions.

For back-to-back toilet installations: Use only a 45° double wye fitting.

ADA, OBC, CSA B651 compliant when installed to the specific requirements of these regulations. Plumbing codes may require elongated toilets and elongated, open-front seats in public bathrooms.

Accessibility standards may require controls to be located on the open side of the toilet.

