



Tall two-piece round-front toilet, 1.6 gpf K-35717

Features

- Two-piece design
- Round-front bowl offers an ideal solution for smaller bathrooms and powder rooms
- Tall height offers seating 2-1/2" (63.5 mm) higher than Comfort Height® for enhanced comfort, ease of sitting and standing, and gracious accessibility
- 1.6 gpf (6.0 lpf)
- Left-hand Polished Chrome trip lever
- 2-1/8" (54 mm) fully glazed trapway
- Precision-engineered tank, bowl, and trapway create strong siphon during flushing
- Class Five® canister optimizes the flow out of the tank, harnessing gravity and the natural, powerful reducing cascade of water to increase the power and effectiveness of the flush
- Easy-to-flush canister design requires less force to actuate than a 3" (76 mm) flapper, and has 90% less exposed seal material which resists conditions that cause wear, tear, shrinkage and swelling
- Combination consists of 35643 bowl and 4468 tank

Installation

- Standard 12" (305 mm) rough-in
- Seat and supply line sold separately



Codes/Standards

ASME A112.19.2/CSA B45.1 DOE - Energy Policy Act 1992

KOHLER® Toilets and Seats Limited Warranty

See website for detailed warranty information.

Available Colors/Finishes

Color tiles intended for reference only.


Color	Code	Description
	0	White
	96	Biscuit
	7	Black Black™







Tall two-piece round-front toilet, 1.6 gpf K-35717

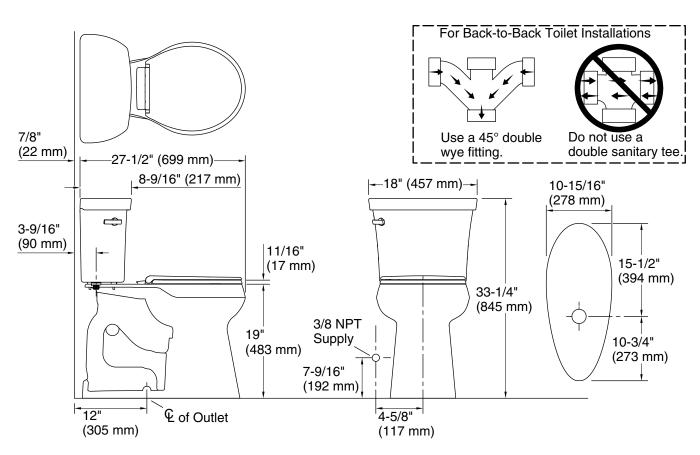

Technical Information

All product dimensions are nominal.

Toilet type: Floor-mount

Waste Outlet: Floor
Flush type: Class Five
Trap passageway: 2-1/8" (54 mm)
Rim to water 6-3/8" (162 mm)

surface:

Rough-in: 12" (305 mm)

Fixture Supply Requirements

Min static pressure: 20 psi (137.9 kPa) Max static pressure: 80 psi (551.6 kPa)

Notes

Install this product according to the installation instructions.

Product dimensions are nominal and may vary per ASME A112.19.2 tolerances.

