

## Cimarron® Comfort Height®

two-piece elongated 1.28 gpf toilet K-3609-UR

### **Features**

- Two-piece toilet.
- Elongated bowl offers added room and comfort.
- Comfort Height® feature offers chair-height seating that makes sitting down and standing up easier for most adults.
- 1.28 gallons per flush (gpf).
- Right-hand Polished Chrome trip lever included.
- Insuliner® tank liner minimizes condensation on the tank when exposed to high humidity.
- Combination consists of the K-4309 bowl and the K-4421-UR
- Coordinates with other products in the Cimarron collection.

### Technology

- Single-flush gravity uses the force of gravity and a precision-engineered tank, bowl, and trapway to create a strong siphon during flushing.
- AquaPiston canister allows water to flow into the bowl from all sides (360 degrees), increasing the power and effectiveness of the flush.
- Flush valve's 3:2 ratio harnesses the natural force of gravity and optimizes flush performance.
- Durable canister design has 90% less exposed seal material than a 3-inch flapper, for leak-free performance.
- Light-touch canister flush requires a lower actuation force than a flapper.
- AquaPiston canister flush valve optimizes flush performance and resists warping and deterioration.

### Installation

- Standard 12-inch rough-in.
- DryLock<sup>™</sup> System saves installation time and helps prevent water leakage.
- Seat and supply line not included.

### **Water Conservation & Rebates**

- WaterSense® toilets meet strict EPA flushing guidelines, including using at least 20 percent less water than 1.6-gallon toilets.
- Eligible for consumer rebates in some municipalities.

### **Recommended Products/Accessories**

K-4636 Cachet® Quiet-Close™ Elongated Toilet Seat

K-5588 Purefresh® Elongated Toilet Seat

K-4108 C3®-230 elongated cleansing toilet seat

K-5420 Low-Profile Bolt Caps

K-9466-L Left-Hand Trip Lever

K-9470-L Left-Hand Trip Lever

1023457 Wax Ring/Hardware Kit

1265114 Connector Hose





CSA B651 ADA

**OBC** 

Codes/Standards ASME A112.19.2/CSA B45.1 DOE - Energy Policy Act 1992 EPA WaterSense® ADA ICC/ANSI A117.1

CSA B651 OBC

### **KOHLER® One-Year Limited Warranty**

See website for detailed warranty information.

#### Available Colors/Finishes

Color tiles intended for reference only.


Color	Code	Description
	0	White
	96	Biscuit
	47	Almond



# **KOHLER**®

## Cimarron® Comfort Height®

two-piece elongated 1.28 gpf toilet K-3609-UR

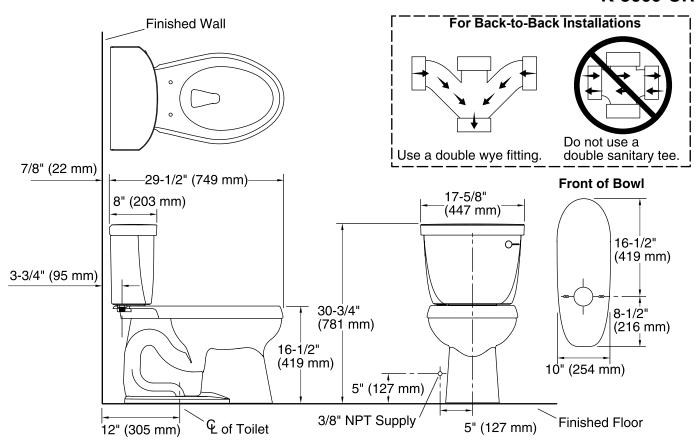

### **Technical Information**

All product dimensions are nominal.

Toilet type: Two-piece, Floor-mount

Waste Outlet: Floor
Bowl shape: Elongated
Flush type: AquaPiston®
Trap passageway: 2-1/8" (54 mm)

Water Consumption

Full: 1.28 gpf (4.8 lpf)

Water surface size: 10-1/2" x 7-7/8" (267 mm x 200 mm)

Rim to water surface: 6-3/8" (162 mm)
Rough-in: 12" (305 mm)
Seat-mounting holes: 5-1/2" (140 mm)

#### **Notes**

Install this product according to the installation instructions.

For back-to-back toilet installations: Use only a 45° double wye fitting.

ADA, OBC, CSA B651 compliant when installed to the specific requirements of these regulations. Plumbing codes may require elongated toilets and elongated, open-front seats in public bathrooms.

Accessibility standards may require controls to be located on the open side of the toilet.

