

Memoirs® Stately

Two-piece round-front toilet, 1.28 gpf K-3933-U

Features

- Two-piece design
- Round-front bowl offers an ideal solution for smaller bathrooms and powder rooms
- Comfort Height® feature offers chair-height seating that makes sitting down and standing up easier for most adults
- Left-hand Polished Chrome trip lever
- Insuliner® tank liner minimizes condensation on the tank
- Combination consists of toilet bowl and tank
- Coordinates with other products in the Memoirs collection with Stately design
- Easy-to-flush canister design requires less force to actuate than a 3" (76 mm) flapper, and has 90% less exposed seal material which resists conditions that cause wear, tear, shrinkage and swelling
- Eligible for consumer rebates in some municipalities
- 1.28 gpf (4.8 lpf)
- 2-1/8" (54 mm) fully glazed trapway
- AquaPiston® canister optimizes the flow out of the tank, harnessing gravity and the natural, powerful reducing cascade of water to increase the power and effectiveness of the flush

Installation

Seat and supply line sold separately

Recommended Products/Accessories

K-5589 Purefresh® Deodorizing round-front toilet seat K-76923 PureWash® M250 Quiet-Close™ round-front manual bidet toilet seat K-5420 Low-Profile Bolt Caps K-9167-L Trip Lever 1023457 Wax Ring/Hardware Kit 1265114 Connector Hose K-23726 Drain treatment

Included Components

K-4387 Round-front bowl with exposed trapway K-4434-U Toilet tank, 1.28 gpf





Codes/Standards

ASME A112.19.2/CSA B45.1 DOE - Energy Policy Act 1992 EPA WaterSense® California Energy Commission (CEC) ADA ICC/ANSI A117.1 CSA B651

KOHLER® Toilets and Seats Limited Warranty

See website for detailed warranty information.

Available Colors/Finishes

Color tiles intended for reference only.

Color Code Description


0 White





Memoirs® Stately

Two-piece round-front toilet, 1.28 gpf K-3933-U

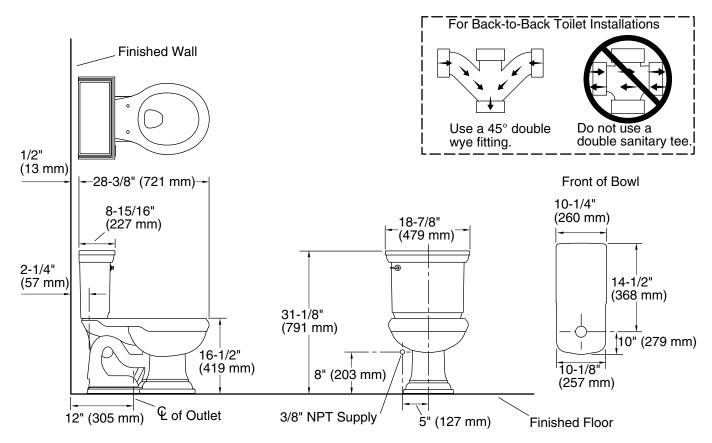

Technical Information

All product dimensions are nominal.

Toilet type: Floor-mount

Waste Outlet: Floor

Bowl shape: Round-front
Flush type: AquaPiston
Trap passageway: 2-1/8" (54 mm)

Water surface size: 11-1/2" x 8-3/4" (292 mm x 222 mm)

Rim to water 6-1/8" (156 mm)

surface:

Rough-in: 12" (305 mm) Seat-mounting 5-1/2" (140 mm)

holes:

Notes

Install this product according to the installation instructions.

For back-to-back toilet installations: Use only a 45° double wye fitting.

Product dimensions are nominal and may vary per ASME A112.19.2 tolerances.

ADA, CSA B651 compliant when installed to the specific requirements of these regulations. Plumbing codes may require elongated toilets and elongated, open-front seats in public bathrooms.

Accessibility standards may require controls to be located on the open side of the toilet.

