



Two-piece round-front toilet, 1.28 gpf K-3947

#### **Features**

- Two-piece design
- Round-front bowl offers an ideal solution for smaller bathrooms and powder rooms
- Left-hand Polished Chrome trip lever
- Combination consists of toilet bowl and tank
- Coordinates with other products in the Wellworth collection
- KOHLERs canister flush valve harnesses the natural force of gravity and optimizes flushing performance
- Eligible for consumer rebates in some municipalities
- 1.28 gpf (4.8 lpf)
- 2-1/8" (54 mm) fully glazed trapway
- Class Five® canister optimizes the flow out of the tank, harnessing gravity and the natural, powerful reducing cascade of water to increase the power and effectiveness of the flush

#### Installation

- Three-bolt quick-connect installation
- Seat and supply line sold separately

### **Recommended Products/Accessories**

K-5420 Low-Profile Bolt Caps K-9379 Trip Lever 1023457 Wax Ring/Hardware Kit 1265114 Connector Hose K-23726 Drain treatment

K-4639-RL Cachet® ReadyLatch® Quiet-Close™ round-front See website for detailed warranty information. toilet seat

## **Included Components**

K-4197 Round-front toilet bowl K-4841 Toilet tank, 1.28 gpf





## Codes/Standards

ASME A112.19.2/CSA B45.1 DOE - Energy Policy Act 1992 EPA WaterSense® California Energy Commission (CEC)

# **KOHLER® Toilets and Seats Limited** Warrantv

### Available Colors/Finishes

Color tiles intended for reference only.


Color	Code	Description
	0	White
	96	Biscuit
	7	Black Black™







Two-piece round-front toilet, 1.28 gpf **K-3947** 

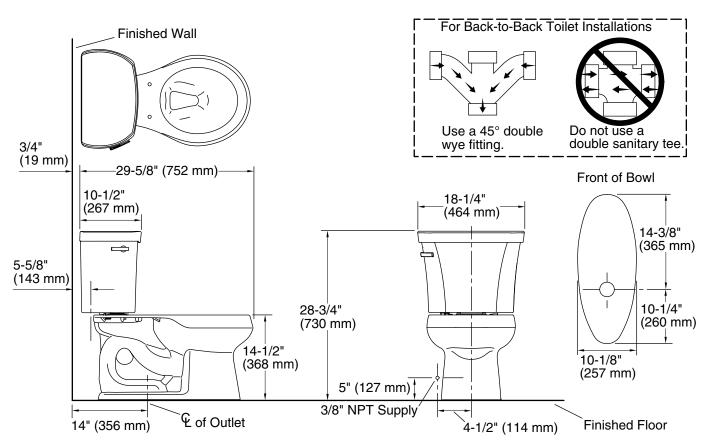

### **Technical Information**

All product dimensions are nominal.

Toilet type: Floor-mount

Waste Outlet: Floor

Bowl shape: Round-front
Flush type: Class Five
Trap passageway: 2-1/8" (54 mm)

Water surface size: 10-1/2" x 7-3/4" (267 mm x 197 mm)

Rim to water 5-1/4" (133 mm)

surface:

Rough-in: 14" (356 mm) Seat-mounting 5-1/2" (140 mm)

holes:

### **Notes**

Install this product according to the installation instructions.

Product dimensions are nominal and may vary per ASME A112.19.2 tolerances.

