



Rear spud flushometer bowl with integral seat K-4398

Features

- Elongated bowl offers added room and comfort
- Angle back and wall outlet
- Integral seat
- 4-1/2" (114 mm) rough-in
- 1-1/2" (38 mm) rear spud
- 2-3/8" (60 mm) passageway
- 11" (279 mm) x 9-1/2" (241 mm) water area
- 1.6 gpf (6.0 lpf)

Material

Vitreous china

Installation

Designed for use in prisons and mental healthcare facilities.
Not anti-ligature



Codes/Standards

ASME A112.19.2/CSA B45.1 DOE - Energy Policy Act 1992

KOHLER® One-Year Limited Warranty

See website for detailed warranty information.

Available Colors/Finishes

Color tiles intended for reference only.


Color Code Description

0 White





Rear spud flushometer bowl with integral seat K-4398

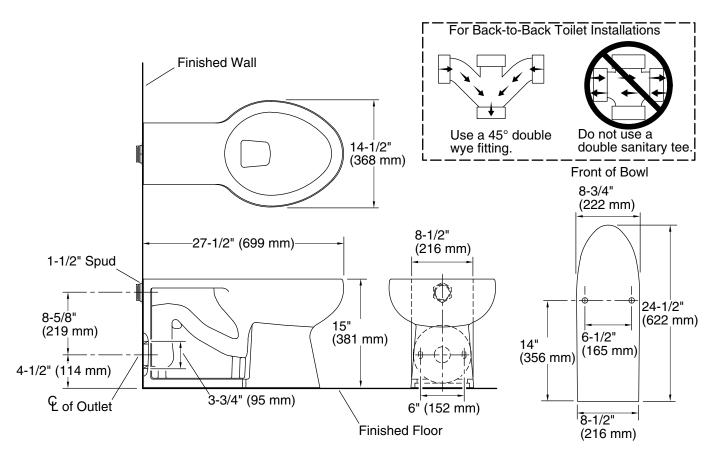

Technical Information

All product dimensions are nominal.

Toilet type: Floor-mount

Waste Outlet: Wall

Bowl shape: Elongated

Spud size: 1-1/2"", Inlet, Rear Trap passageway: 2-1/2" (63 mm)

Water surface size: 11" x 9-1/2" (279 mm x 241 mm)

5-1/4" (133 mm)

Rim to water

surface:

Rough-in: 4-1/2" (114 mm) Seat-mounting 5-1/2" (140 mm)

holes:

Notes

Install this product according to the installation instructions.

Refer to manufacturer's instructions and local codes for flushometer requirements.

For back-to-back toilet installations: Use only a

45° double wye fitting.

Ensure valve is braced properly.

Ensure pressure and flow are correct.

Product dimensions are nominal and may vary

per ASME A112.19.2 tolerances.

