

DAS 4930
Built-in ventilation hood
with intuitive SmartControl controls



- Elegant design – Obsidian Black control panel, 90 cm wide
- Unique user convenience – Con@ctivity
- LED strip for uniform lighting
- Efficient filtration- 10-ply stainless steel grease filters
- Recirculation mode – Active AirClean or Longlife AirClean filter

EAN: 4002516496199 / Material number: 11878550 / Old Material Number: 28S4930BUSA

Construction type	
Built-in ventilation hood	•
Operating modes	
Recirculated mode	Convertible
Recirculation conversion kit (order separately)	DUU 151
OdorFree charcoal filter (order separately)	DKFS 31-P, DKFS 31-R
Design	
Color	Obsidian black
Control panel	
Miele@home	•
Automatic function Con@ctivity 3.0 (WiFi)	•
Electronic controls	•
Touch controls on glass	•
Programmable Intensive switch-off	•
Delayed shutdown for 5 or 15 minutes	•
Grease filter saturation indicator	•
Programmable grease filter saturation indicator	•
Programmable charcoal filter saturation indicator	•
Cleaning convenience	
Easy to clean canopy interior CleanCover	•
Filter system	
Number of dishwasher-safe stainless-steel grease filters	1
Lighting	
LED	•
Number x W	1 x 3 W
Light intensity in lx	300 lx
Color temperature in K	3500 Kelvin
Light dimmer function	•
Blower	
Dual-action blower	•
AC motor	•
Safety	
Safety shut-off	•
Single-ply safety glass (ESG)	•
Technical data	
Canopy width in in.(mm)	35 3/8 (896)
Canopy height in in.(mm)	1 1/2 (36)
Canopy depth in in.(mm)	10 3/4 (273)
Minimum height above electric hobs in mm	24 1/8 (610)
Minimum height above gas hobs (max. 12.6 kW total power, burner ≤ 4.5 kW) in mm	26 (660)
Net weight in lbs. (kg)	36 (16.0)
Length of electrical wire in ft (m)	2 (0.8)
Standard plug fitted	•
Total connected load in kW	0.35
Voltage in V	120
Fuse rating in A	15
Number of phases	1
Frequency in Hz	60


DAS 4930
Built-in ventilation hood
with intuitive SmartControl controls



EAN: 4002516496199 / Material number: 11878550 / Old Material Number: 28S4930BUSA


Installation notes	
Vent connection at top	•
Accessories supplied	
Non-return flap	•
Optional accessories	
OdorFree charcoal filter	Nein

DAS 4930 Built-in ventilation hood with intuitive SmartControl controls

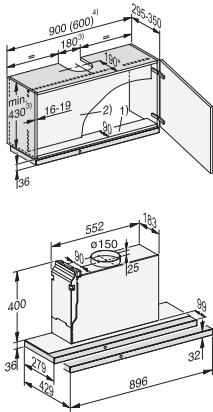

DAS4930, DAS4931, Installation drawings

1) The front section of the wall unit must be fitted with a base panel to secure the cooker hood. If the appliance is fitted further back, e.g. to accommodate a front panel, then the shelf depth should be deeper accordingly. , 2) If a partition wall is to be provided in the unit, it must be removable., 3) Extraction, recirculation with conversion kit DUU 150., 4) Installation is also possible in a 600 mm wide unit., * In this installation situation, the deflector plate is flush with the front edge of the housing unit carcass. , If you wish to position the cooker hood further forward or further back, dimensions have to be adapted accordingly., , Extraction: the height of the wall unit and the cut-out dimensions must take into account any accessories fitted, e.g. silencer, recirculation hood conversion kit).

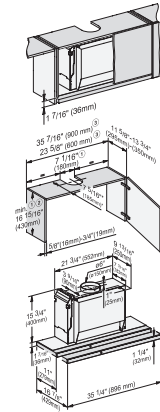

DAS4930, DAS4931, drawing – US

1) Exhaust air, mounted accessories must be taken into account for dimensions of cabinet height and cutouts., 2) Exhaust air, recirculation with DUU 150 conversion kit., 3) Installation is also possible in a 600 mm wide cabinet., , *In this installation situation, the screen is flush with the front edge of the cabinet. If the cooker hood is positioned further to the front or rear, the dimensions must be adjusted accordingly.