



Project:	Type:
Prepared By:	Date:

Technical Specifications

Performance

Product Type:

Decorative

Input Wattage:

5W

Wattage Equivalency:

60W Incandescent

Lumens (Nominal):

500lm

Efficacy:

91 lm/W

L70 Lifespan:

15,000 Hours

Construction

Bulb Shape:

B11

Finish:

Clear

Base Type:

E26

For Use Outdoors in Open Fixtures:

No

LED Characteristics

Color Temperature:

2700K Soft White

Color Accuracy (CRI):

90 CRI

Electrical

Power Factor:

0.7

Operating Temperature:

-20°C - 45°C (-4°F - 113°F)

**Technical Specifications (continued)**

**Electrical**

**Dimmable:**

Yes, down to 10%

**Input Voltage:**

120V

**Flicker:**

<30%

**Optical**

**Beam Angle:**

360°

**Other**

**Warranty:**

RAB warrants that our LED products will be free from defects in materials and workmanship for a period of three (3) years from the date of delivery to the end user, including coverage of light output, color stability, driver performance and fixture finish. RAB's warranty is subject to all terms and conditions found at [rablighting.com/warranty](http://rablighting.com/warranty).

**Buy American Act Compliance:**

RAB values USA manufacturing! Upon request, RAB may be able to manufacture this product to be compliant with the Buy American Act (BAA). Please contact customer service to request a quote for the product to be made BAA compliant.

**Compliance**

**ETL Qualified:**

Yes

**ENERGY STAR V2.0:**

This product is ENERGY STAR® Version 2.0 Certified

**Energy Star ID:**

2330371


**California Energy Commission (CEC) Status:**

Lawful for sale in California


**Case and Pallet Dimensions**

	QTY	LENGTH (in)	WIDTH (in)	HEIGHT (in)
CASE	12	6.5	4.9	4.7
PALLET	3180	38.4	46.3	39.4

**Dimension**

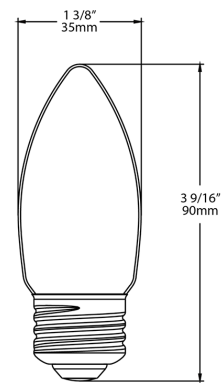

**Light Distribution**

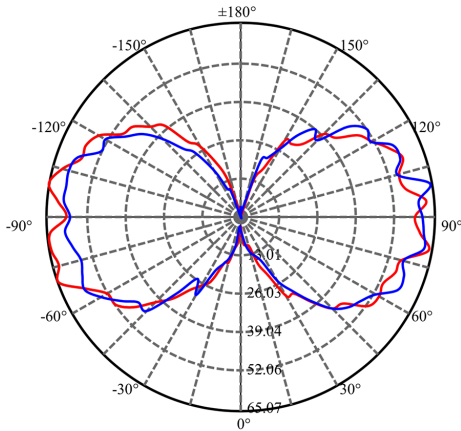

**Features**

- Replacement for conventional decorative lamps
- Filament LED construction gives a unique traditional look and feel for decorative and ambient applications
- Produces rich and vibrant colors, >90CRI
- Rated for use in enclosed and open fixtures in dry and damp locations
- Longer lifespan compared to legacy equivalents minimizes replacement and maintenance costs
- Title 20 Compliant, ENERGY STAR Compliant, UL Listed
- Smooth uniform dimming down to 10% (check dimmer compatibility list)

**Ordering Matrix**

Family	Wattage	Base Type	CRI/Color Temp	Type	Finish
B11	5	E26	927	F	C
	3 = 3W	E12 = E12	940 = 90 CRI, 4000K	F = Filament	C = Clear
	5 = 5W	E26 = E26	930 = 90 CRI, 3000K		F = Frosted
			927 = 90 CRI, 2700K		