


<b>Project:</b>	<b>Type:</b>	<b>Prepared By:</b>	<b>Date:</b>
-----------------	--------------	---------------------	--------------

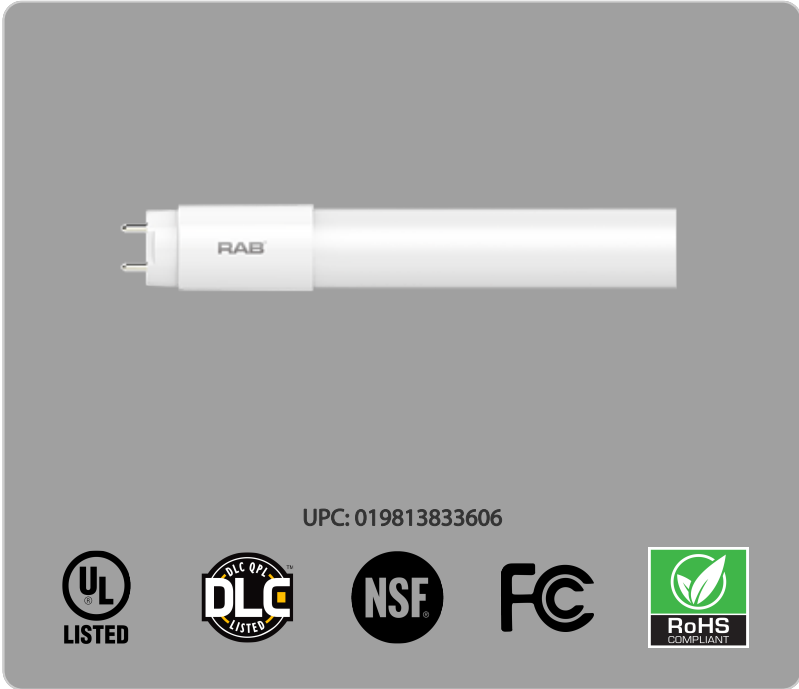

### Features and Benefits

- Direct Replacement for Fluorescent Lamps: F32T8/32W, F32T8/30W, F32T8/28W, F32T8/25W
- Easy to install plug and play that requires no rewiring, no tools, no instructions
- 50,000 hour Lifespan
- Rated for use in enclosed and open fixtures in dry or damp locations
- Diffused frosted lens will maintain the same light quality over time
- Compatible with most instant start electronic T8 ballasts, Please check Compatibility List
- Approximately 40% more efficient than fluorescent T8 lamps
- Instant on full brightness
- Environmentally friendly, no mercury used
- NSF Listed: NSF/ANSI Standard 2 - Food Equipment - Splash Zone (Not for Direct Food Zone without additional fixture considerations)
- Compatible with RAB specified 0-10V dimming system

### Technical Specifications

Performance	Construction	LED Characteristics
<b>Product Type:</b> Linear	<b>Material:</b> Coated Glass	<b>Color Temperature:</b> 4000K Cool White
<b>Input Wattage:</b> 14W	<b>Bulb Shape:</b> T8	<b>Color Accuracy (CRI):</b> 80 CRI
<b>Lumens (Nominal):</b> 2200 lm	<b>Nominal Length:</b> 4 FT	<b>Electrical</b>
<b>Efficacy:</b> 157 lm/W	<b>Finish:</b> Frosted	<b>THD:</b> ≤25%
<b>L70 Lifespan:</b> 50,000 Hours	<b>Base Type:</b> G13	<b>Power Factor:</b> Ballast Dependent
<b>Wattage Equivalency:</b> 32W Fluorescent	<b>For Use Outdoors in Open Fixtures:</b> No	<b>Operating Temperature:</b> -20°C - 45°C (-4°F - 113°F)

**Technical Specifications (continued)**

**Electrical**

**Dimming:**

Yes with 0-10V dimmer & plus ballast. See Dimmer Compatibility List.

**Input Voltage:**

Ballast Dependent

**Operating Frequency:**

Ballast Dependent

**Input Current @ 120V:**

Ballast Dependent

**Input Current @ 277V:**

Ballast Dependent

**Flicker:**

Ballast Dependent

**Other**

**Warranty:**

RAB warrants that our LED products will be free from defects in materials and workmanship for a period of five (5) years from the date of delivery to the end user, including coverage of light output, color stability, driver performance and fixture finish. RAB's warranty is subject to all terms and conditions found at [rablighting.com/warranty](http://rablighting.com/warranty).

**Installation**

**Installation Type:**

Type A, Plug and Play

**Compliance**

**UL Listed:**

Yes

**NSF Listed:**

Meets NSF/ANSI standards for use in Food Zone (non-contact), Splash, and Non-Food Zones. Tube guard required in open fixtures.

**DLC Model Number:**

T10017

**California Energy Commission (CEC) Status:**

Lawful for sale in California

**Application:**

Suitable for damp locations and totally enclosed fixtures.

**DLC Listed:**

This product is on the Design Lights Consortium (DLC) Qualified Products List and is eligible for rebates from DLC Member Utilities. Designed to meet DLC 5.1 requirements.  
DLC Product Code: PL5P4N7GYLU5

**Optical**

**Beam Angle:**

180°


**Ballast Performance**

	0.78BF	0.88BF	1.88BF
Lumens	1750	2200	3000
System Power (W)	13	16	22.3


**Case and Pallet Dimensions**

	QTY	LENGTH (in)	WIDTH (in)	HEIGHT (in)
CASE	25	49.4	7.7	7.5
PALLET	625	43.3	40.6	51.2

**Wiring Diagram**

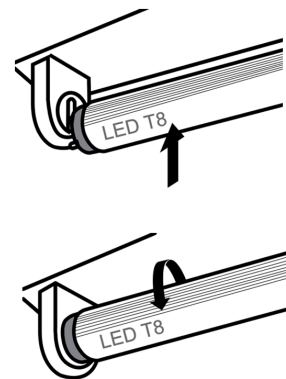

**Dimension**

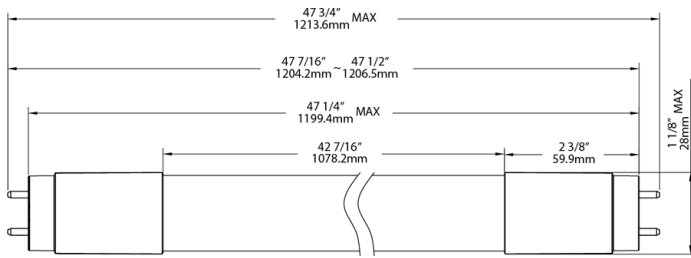

**Light Distribution**

