



PRODUCT SUBMITTAL 700

RAUPANEL Aluminium Heating Panel

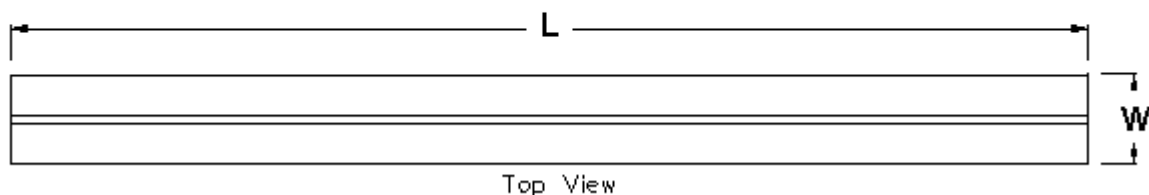

Product: RAUPANEL™ Aluminum Panel
Date: 01 September 2021 (supersedes 24 July 2014)

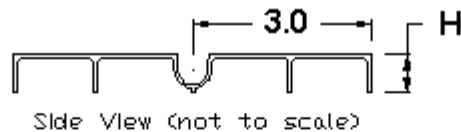

Article No.	Description	Length L in (mm)	Width W in (mm)	Height H in (mm)	Floor coverage ft ² (m ²)	Unit weight Lb (kg)
235307-001	RAUPANEL aluminum panel	72.0 (1830)	6.0 (152)	0.625 (15.9)	3.0 (0.28)	3.8 (1.7)

TECHNICAL DESCRIPTION

Material	Aluminum, 0.060 in (1.5 mm) thick
----------	-----------------------------------

FUNCTIONAL DESCRIPTION

RAUPANEL high-performance heat transfer panels are designed for radiant heating systems in new construction and retrofit installations. These heat transfer panels are used in radiant floors, walls and ceilings to efficiently and evenly distribute the heat from REHAU RAUPEX® pipe into the room. Panels are installed between the subfloor and the finished floor. Walls and ceilings may be used to increase the heat output of a room; panels are installed between the joists and the wall or ceiling covering in these applications. RAUPANEL aluminum panels have a special groove design that allows pipe to be snapped into place, maintaining excellent thermal contact for conductivity. Silicone or other filler materials are not required. Typically, components are secured to the subfloor or wall/ceiling joists and then the 3/8 in. RAUPEX pipe snaps into place. Pipe spacing can be 6 in (152 mm) or 8 in (203 mm) on-center, or a combination of both depending on the piping layout. RAUPANEL components are 5/8 in (15.9 mm) thick. Radiant floor heating systems are quieter than many other heating systems, but no one can ever guarantee that a heated floor will be noise free. By following proper installation practices and observing all manufacturers' recommendations, noise during heating system operation can be minimized. For additional precautions refer to REHAU *Technical Bulletin 257, Minimizing Noise in Heated Panel and Plate Systems*. REHAU RAUPANEL Product Instructions include specific recommendations regarding noise. A plywood subfloor is preferred underneath RAUPANEL; if OSB subflooring is used, REHAU recommends applying a non-asphalt synthetic felt between the OSB subflooring and RAUPANEL.

For updates to this publication, visit na.rehau.com/resourcecenter

The information contained herein is believed to be reliable, but no representations, guarantees or warranties of any kind are made as to its accuracy, suitability for particular applications or the results to be obtained therefrom. Before using, the user will determine suitability of the information for user's intended use and shall assume all risk and liability in connection therewith.

© 2021 REHAU

PRODUCT SUBMITTAL 700

RAUPANEL Aluminium Heating Panel



MATERIAL PLANNING

For quick estimating purposes, the following guidelines may be of use for a typical piping layout. This material estimating information is not intended to be used for any particular project, nor as a final drawing requirement or specification, and is only provided as an aid for quick quotation purposes. REHAU LoopCAD® radiant design software is recommended for calculating material lists for any particular project.

	Piping layout pipe spacing	Heated area ft ²		Material estimating factor	=	Estimated material requirements
Art. 235307-001 aluminum panel	6 in (152 mm) on-center	_____	x	0.29	=	_____ pieces
	8 in (203 mm) on-center	_____	x	0.22	=	_____ pieces
				Sum total	Σ	_____ pieces

For updates to this publication, visit na.rehau.com/resourcecenter

The information contained herein is believed to be reliable, but no representations, guarantees or warranties of any kind are made as to its accuracy, suitability for particular applications or the results to be obtained therefrom. Before using, the user will determine suitability of the information for user's intended use and shall assume all risk and liability in connection therewith.

© 2021 REHAU