# SLOAN.

### CODE NUMBER

3913349

#### DESCRIPTION

1.0 gpf, Rough Brass Finish, Single Flush, 12.75 L Dimension, Royal® Concealed Manual Urinal Flushometer.

## DETAILS

- Flush Volume: 1.0 gpf (3.8 Lpf)
- Finish: Rough Brass (RB)
- Valve: Diaphragm
- Valve Body Material: Semi-red Brass
- Fixture Type: Urinal
- Fixture Connection: Rear spud
- Rough-In Dimension: 13 <sup>1</sup>/<sub>2</sub>" (343mm)
- Spud Coupling: <sup>3</sup>/<sub>4</sub>" (19mm)
- Supply Pipe: <sup>3</sup>/<sub>4</sub>" (19mm)
- L Dimension: 12 <sup>3</sup>/<sub>4</sub>" (324mm) (12-3/4-LDIM)

## FEATURES

Quiet, Concealed, Diaphragm Type, Rough Brass Urinal Flushometer for either

- Vacuum Breaker
- Spud Coupling for 3/4" Concealed Back Spud Urinals
- Elbow Flush Connection
- Non-Hold-Open Handle, Fixed Metering Bypass and No External Volume Adjustment to Ensure Water Conservation
- Diaphragm, Handle Packing and Vacuum Breaker to be molded from PERMEX® Rubber Compound for Chloramine Resistance
- ADA Compliant Metal Oscillating Non-Hold-Open Handle
- 3/4" I.P.S. Wheel Handle Bak-Chek® Angle Stop



## **COMPLIANCES & CERTIFICATIONS**



(ADA Compliant, cUPC Certified, BAA Compliant)

## **RECOMMENDED SPECIFICATION**

Valve Body, Cover, Tailpiece and Control Stop shall be in conformance with ASTM Alloy Classification for Semi- Red Brass. Valve shall be in compliance with the applicable sections of ASSE 1037 and ANSI/ASME 112.19.2.

#### VALVE OPERATING PRESSURE (FLOWING)

15-80 PSI (103-552 kPa). Specific fixtures may require greater minimum flowing pressure - consult manufacturer requirements.

#### DOWNLOADS

- Sloan Concealed Installation Instructions
- Control Stop Repair and Maintenance Guide
- Flush Connections Flanges Repair and Maintenance Guide
- Tail Piece Repair and Maintenance Guide
- Additional Downloads

#### NOTES

All information contained within this document subject to change without notice.

Looking for other variations of the ROYAL 195 product? View the general spec sheet with all options.


Find a compatible urinal for this flushometer. Find a compatible water closet for this flushometer.

Sloan 10500 Seymour Ave, Franklin Park, IL 60131

# ROYAL® MANUAL FLUSHOMETER ROYAL 195-1.0-12-3/4-LDIM



## **ROUGH-IN**

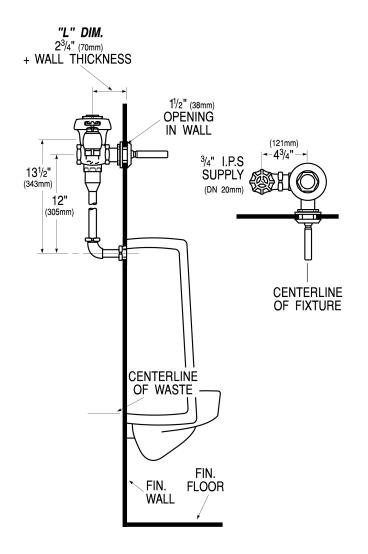

Sloan 10500 Seymour Ave, Franklin Park, IL 60131 Phone: 800.982.5839 • Fax: 800.447.8329 • sloan.com