

SPEAKMAN® SE-675

Combination Shower with Eye/Face Wash System

EYE/FACE WASH FEATURES: (SE-575)

- (2) yellow plastic spray outlets with flip-top dust caps
- ½ in. NPT female brass, chrome-plated, full flow stay-open ball valve
- Stainless steel push handle activator
- ½ in. NPT male inlet
- 4.5 gpm @ 30 psi
- Universal Emergency Sign Included

SHOWER FEATURES:

- 8 in. yellow plastic showerhead
- Internal 20 gpm restrictor flow control
- 1 in. NPT female brass, chrome-plated, full flow stay-open ball valve
- Powder coated yellow, aluminum triangular pull rod activator
- 1¼ in. IPS galvanized steel piping stanchion with brass fittings
- 1¼ in. NPT female inlet
- 20 gpm @ 30 psi

FINISHES:



DuraJade™



Stainless Steel

COMPLIANCE:

- Certified to ANSI/ISEA Z358.1


OPTIONS:

Add suffix to model #

- | | |
|---|---------------------------------|
| • Anti-freeze protection valve | <input type="checkbox"/> -FPV |
| • Hand & foot operation | <input type="checkbox"/> -HFO |
| • Hand-held spray | <input type="checkbox"/> -HS |
| • Self-closing shower valve with chain & ring | <input type="checkbox"/> -SCSV |
| • Stainless steel pull rod | <input type="checkbox"/> -SPR |
| • Anti-scald protection valve | <input type="checkbox"/> -SPV |
| • 1 in. IPS stainless steel ball valve | <input type="checkbox"/> -SSBV1 |
| • 1/2 in. IPS stainless steel ball valve | <input type="checkbox"/> -SSBV2 |
| • Stainless steel showerhead | <input type="checkbox"/> -SSH |

WARRANTY:

- 3 year limited

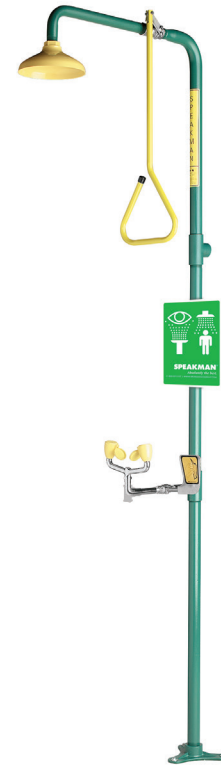

DIMENSIONS: NOTE: 1. All dimensions are in inches (millimeters) unless otherwise specified and are subject to change without notice.

