



Accord®

60" tile bath/shower with right-hand drain
71140123-N



Features

- Modular design allows it to be moved around corners and through doorways with ease.
- Durable high-gloss finish.
- Realistic tile wall surround features molded-in shelves for generous storage.
- 15" apron.
- Includes three Matte Silver grab bars (one 80011032-N and two 80001024-N) individually packed inside the wall set box.
- Realistic tile wall surround features molded-in shelves for generous storage.

Material

- Compression-molded from our exclusive Vikrell® material.

Installation

- Alcove.
- Four-piece modular design with pivot "snap together" installation.
- Caulkless seam installation.


Recommended Products/Accessories

- 500C-59 Framed Sliding Bath Door
- 690B-59 Framed Sliding Bath Door
- 5325EZ-57 Frameless Sliding Bath Door
- 5425-57 Frameless Sliding Bath Door
- 5425-59 Frameless Sliding Bath Door
- 5905-59 Framed Sliding Bath Door
- 5906-59 Framed Sliding Bath Door
- 5907-59 Framed Sliding Bath Door
- 542808-59 frameless sliding bath door
- 572005-59 Framed Sliding Bath Door
- 581005-59 frameless sliding bath door
- 80001012 12" Grab Bar
- 80001018 18" Grab Bar
- 80001036 36" Grab Bar
- VA-80172 Window Trim Kit
- 71147103 ADA Adaptable Grab Bar Kit
- 71147104 30" Bath Seat Kit

Included Components

Product consists of:

- 71144103-N 60" x 30" Tile Wall Set w/ AIP Grab Bars
- 71141120 60" x 30" Bath
- 80011032 32" Grab Bar
- 80001024 24" Grab Bar (Qty 2)

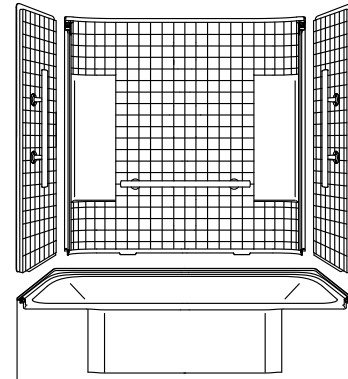

Codes/Standards

- CSA B45.5/IAPMO Z124
- ASTM E162
- ASTM E662
- Greenguard UL 2818 - Gold
- HUD, UM Bulletin 73



Warranty – Bathing Fixtures (and) Kitchen and Utility Sinks Made of Solid Vikrell® Material

STERLING® Warranty - Grab Bars

See website for detailed warranty information.

Available Colors/Finishes

Color tiles intended for reference only.

| Color | Code | Description |
|--|------|----------------|
|  | 0 | White |
|  | 96 | KOHLER Biscuit |


1-800-STERLING (1-800-783-7546)

Kohler Co. reserves the right to make revisions without notice to product specifications.

For the most current Specification Sheet, go to www.sterlingplumbing.com.

4-26-2019 00:19 - US

60" tile bath/shower with right-hand drain 71140123-N

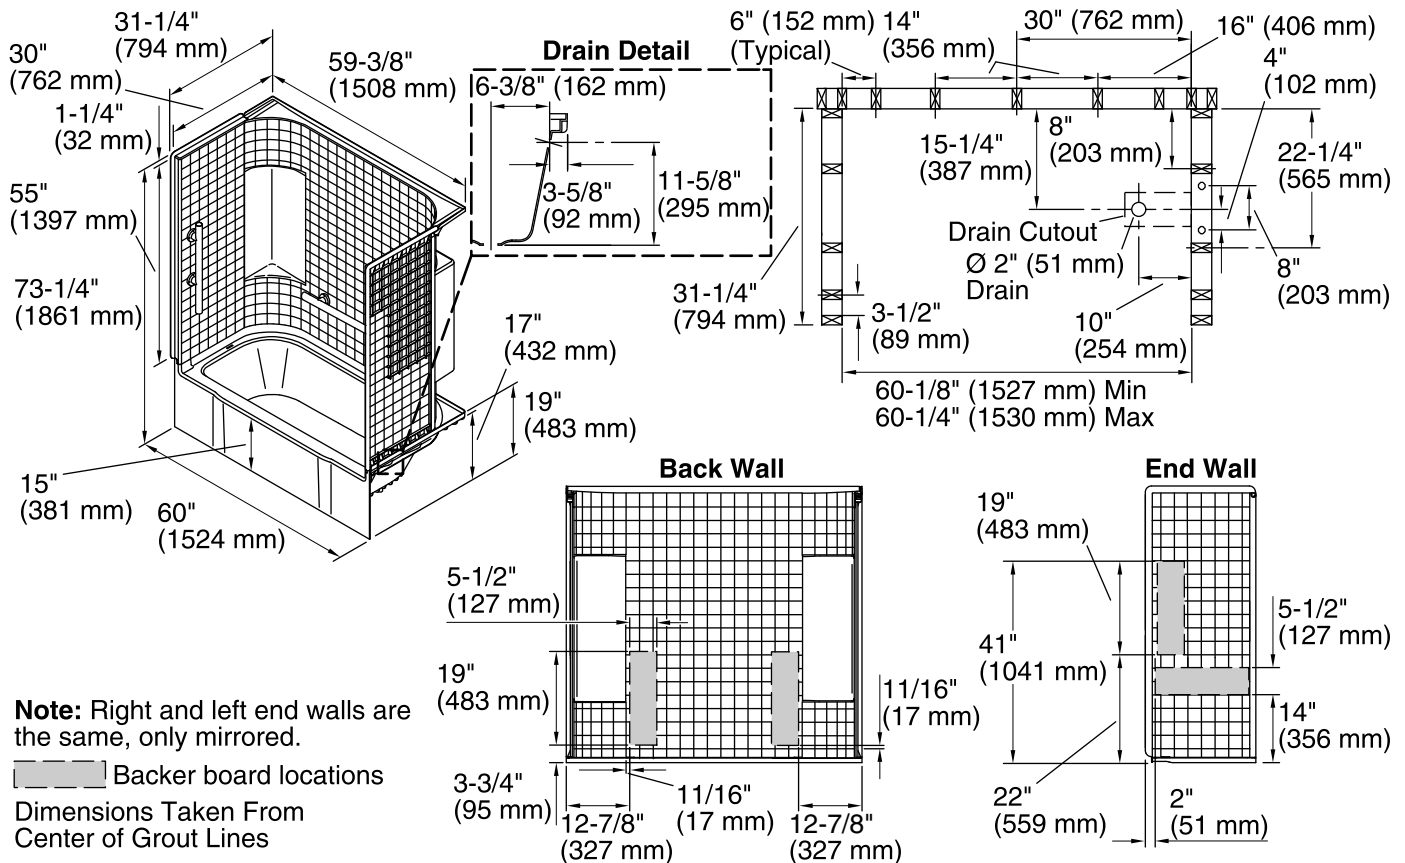

Technical Information

All product dimensions are nominal.

| | |
|------------------------|--------------------------------------|
| Installation: | Three-wall alcove |
| Drain location: | Right |
| Basin area, bottom: | 46-1/4" x 20-1/2" (1175 mm x 521 mm) |
| Basin area, top: | 52-1/4" x 22-1/2" (1327 mm x 572 mm) |
| Water depth: | 11" (279 mm) |
| Water capacity: | 34 gal (128.7 L) |
| Minimum flat for door: | 2-3/4" (70 mm) |
| Maximum door height: | 56-1/2" (1435 mm) |
| Maximum door width: | 56-3/4" (1441 mm) |

Notes

- Install this product according to the installation instructions.
- Product is designed to be used with a single-hole mixer valve with an escutcheon cover not to exceed 7-3/4" (197 mm) in width.
- Studs should be positioned roughly as shown.
- Double studing is recommended for pivot shower door installations.
- Bath cannot be installed without the wall surround.
- Attach grab bars at the specified backerboard locations only.
- Width of back wall at top transitions from 60" (1524 mm) at the front to 59-3/8" (1508 mm) in the back corners. Furring strips approximately 1/4" (6 mm) thick should be used at the back corner studs if drywall is to be installed over the nailing flange.