

### Windham™

# Two-piece round-front 1.28 gpf toilet 402320-RA

#### **Features**

- Two-piece design.
- Round-front bowl offers an ideal solution for smaller bathrooms and powder rooms.
- Standard height.
- 1.28 gpf (4.8 lpf).
- Right-hand Polished Chrome trip lever.
- 2-1/8" (54 mm) fully glazed trapway.

### **Technology**

 Pro Force® Plus flushing technology delivers greater flushing power than previous Pro Force® models.

#### Installation

- Three-bolt quick-connect installation.
- Standard 12" (305 mm) rough-in.
- Seat and supply line sold separately.

### **Recommended Products/Accessories**

K-20111 Brevia<sup>™</sup> Quiet-Close<sup>™</sup> Round-Front Toilet Seat K-4639 Cachet® Quiet-Close<sup>™</sup> Round-Front Toilet Seat K-9466-R Right-Hand Trip Lever K-5420 Low-Profile Bolt Caps K-23726 Drain treatment

### **Included Components**

Product consists of:

403017 Round-front toilet bowl

402362-RA Toilet tank

Additional Components:

Bolt cap accessory pack

Tank cover

Tank mounting pack

Trip lever





### Codes/Standards

ASME A112.19.2/CSA B45.1 DOE - Energy Policy Act 1992 EPA WaterSense® California Energy Commission (CEC)

# STERLING® Warranty - Toilets and Lavatories

See website for detailed warranty information.

### **Available Colors/Finishes**


Color tiles intended for reference only.

Color	Code	Description
	0	White
	96	KOHLER Biscuit

# STERLIN

## Windham™

### Two-piece round-front 1.28 gpf toilet 402320-RA

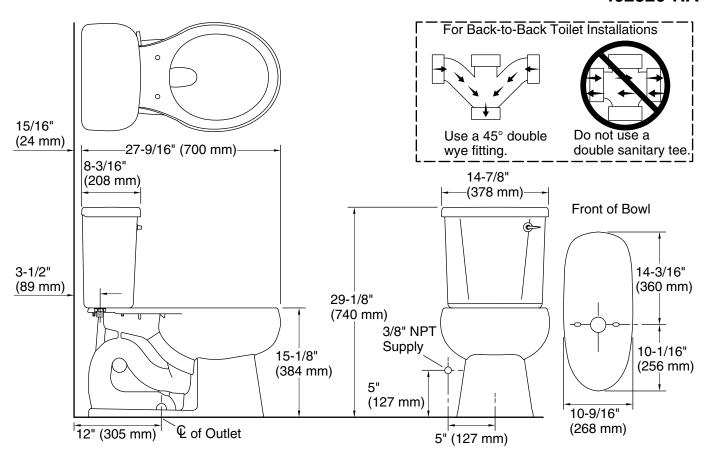

### **Technical Information**

All product dimensions are nominal.

Toilet type: Two-piece, Floor-mount

Waste Outlet: Floor

Bowl shape: Round-front Flush type: Flush Valve Trap passageway: 2-3/8" (61 mm)

Water surface size: 10" x 8" (254 mm x 203 mm)

Rim to water

6-3/16" (157 mm) surface:

Rough-in: 12" (305 mm)

### **Notes**

Install this product according to the installation instructions.

For back-to-back toilet installations: Use only a 45° double wye fitting.