

Valton™ Two-piece elongated toilet 402415-RA

Features

- Two-piece design.
- Elongated bowl offers added room and comfort.
- 1.6 gpf (6.0 lpf)
- Color-matched right-hand white trip lever included.
- 2" (51 mm) fully glazed trapway.
- Combination consists of the 403378 bowl and 404562-RA tank.

Technology

 Pro Force® Plus flushing technology delivers greater flushing power than previous Pro Force® models.

Installation

- Standard 12" (305 mm) rough-in.
- Three-bolt quick-connect installation.
- Seat and supply line sold separately.

Recommended Products/Accessories

K-20110 Brevia[™] Quiet-Close[™] Elongated Toilet Seat K-4636 Cachet® Quiet-Close[™] Elongated Toilet Seat K-5420 Low-Profile Bolt Caps K-23726 Drain treatment

Included Components

Product consists of: 403378 Elongated toilet bowl 404562-RA Toilet tank



Codes/Standards

ASME A112.19.2/CSA B45.1 DOE - Energy Policy Act 1992

STERLING® Warranty - Toilets and Lavatories

See website for detailed warranty information.

Available Colors/Finishes


Color tiles intended for reference only.

Color Code Description

0 White



Valton™ Two-piece elongated toilet 402415-RA

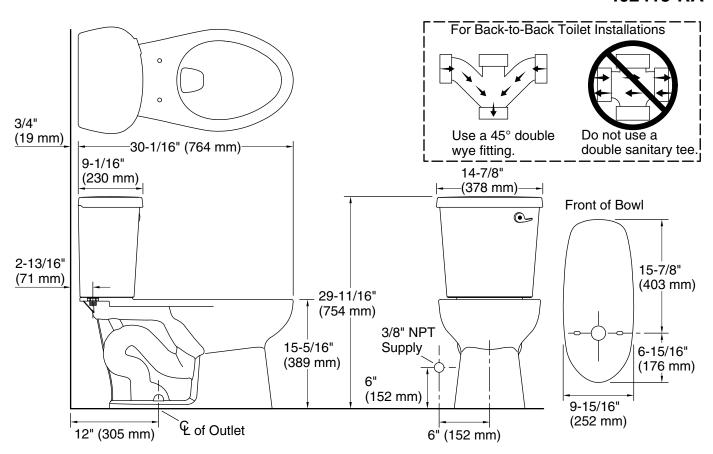

Technical Information

All product dimensions are nominal.

Toilet type: Two-piece, Floor-mount

Waste Outlet: Floor
Bowl shape: Elongated

Flush type: Gravity siphon jet

Water Consumption

Full: 1.6 gpf (6 lpf) Rough-in: 12" (305 mm)

Fixture Supply Requirements

Min static pressure: 15 psi (103.4 kPa) Max static pressure: 80 psi (551.6 kPa)

Notes

Install this product according to the installation instructions.

For back-to-back toilet installations: Use only a

45° double wye fitting.