

WATER HEATER STAND

»» 598 SERIES

SPECIFICATION

Sioux Chief Water Heater Stands shall comply with national and local code requirements when necessary to raise water heaters 18" above the floor. Water heater stand platform and legs shall be manufactured with pre-galvanized steel. Legs shall be cross braced to prevent tipping. Each stand shall include all necessary hardware for complete stand assembly.

ASSEMBLY

Detailed assembly instruction sheet is provided in each box. Lay stand top on floor. Fasten each leg to platform. Install cross braces diagonally between legs. Retighten all screws.

MATERIALS

Platform, legs and cross braces: pre-galvanized steel

Screw: 1/4-20 x 1/2" Phillips

Washer: 1/4" lock washer

Nut: 1/4-20

MAXIMUM LOAD REQUIREMENTS

Standard: 650 lbs. (30-50 gal. heater)

Fast-assembly: 650 lbs. (30-50 gal. heater)

Heavy-duty: 1,300 lbs. (50-100 gal. heater)

DIMENSIONS


	Standard	Fast-assembly	Heavy-duty
Material thickness*	18 gauge (0.0478")	18 gauge (0.0478")	16 gauge (0.0598")
A: Platform size	21" x 21"	21" x 21"	24" x 24"
B: Overall height	18"	18"	18"

* platform/legs/cross braces

ITEM # SUBMITTED	_____
JOB NAME	_____
LOCATION	_____
ENGINEER	_____
CONTRACTOR	_____
PO#	_____ TAG _____



598-010

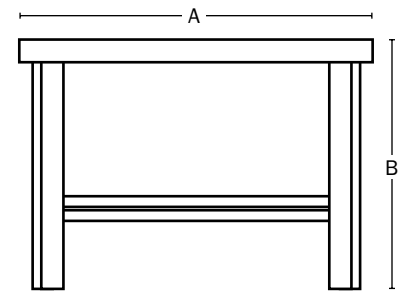

Made in USA

Create Item Number

598-01A

e.g. **598-011:** 18 gauge, 21" x 21" x 18" fast assembly water heater stand for 30-50 gallon heaters

STAND MODEL PER WATER HEATER CAPACITY **A**

- 0** = standard model for 30-50 gallon heaters
- 1** = fast-assembly model for 30-50 gallon heaters
- 2** = heavy-duty model for 50-100 gallon heaters