

# FUEL LINE HOSE

## /// POLYESTER REINFORCED PVC

### SPECIFICATION

This fuel line is made of PVC compounds blended with special additives for use with petroleum products. It is built to last with reinforced polyester braiding and a cover that is oil, grease, and ozone resistant. An excellent choice for applications involving re-circulated petroleum vapors, it also has superior fitting retention at elevated temperatures. This tubing is made for the transfer of petroleum based products when used as a fuel line, vapor emissions line, or vacuum smog control line. NOT FOR FUEL INJECTION APPLICATIONS.

### ATTRIBUTES

- It is built to last with reinforced polyester braiding and a cover that is oil, grease and ozone resistant
- Color: Black

### MATERIALS

Fuel line is made of PVC compounds blended with special additives for use with petroleum products.

### APPLICATIONS

- Transfer of petroleum based products
- Fuel line
- Vapor emissions line
- Vacuum smog control line

### RESISTANCE

(See list on website for listing of chemicals)

**Operating temperature range:** -40°F (-40°C) to 175°F (79°C)

**Material:** Polyester reinforced PVC

**Color:** Black

**Hardness:** Durometer 75+/-3


### PACKAGING

Coils, reels

\*Custom lengths available in large quantity only. Contact your local rep to confirm availability.

*See page 2.*

ITEM # SUBMITTED _____
JOB NAME _____
LOCATION _____
ENGINEER _____
CONTRACTOR _____
PO# _____ TAG _____

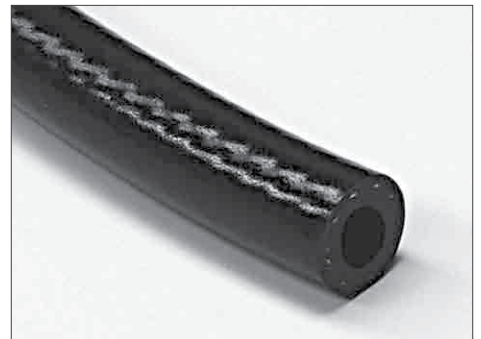

# FUEL LINE HOSE

**/// POLYESTER REINFORCED PVC**

## PRESSURE RANGE

I.D. INCH	O.D. INCH	WALL INCH	WORKING PRESSURE (PSI @ 70°F)
3/16	3/8	3/32	250
1/4	1/2	1/8	200
5/16	5/8	5/32	175
3/8	5/8	1/8	175
3/16	13/32	7/64	–



**WARNING: Not intended for fuel injection applications.  
Not intended for use with potable water.**

Create Item Number

## 900-15 A B N C D

e.g. 900-15054N01505: Fuel Line 3/16" ID X 3/8" OD (3/32" Wall), Black, 150ft Reel

ID SIZE <u>A</u>	WALL <u>B</u>	LENGTH <u>C</u>	PACKAGE <u>D</u>
05 = 3/16"	4 = 3/32"	0005 = 5ft	1 = Coils
10 = 1/4"	5 = 7/64"	0010 = 10ft	5 = Reels
15 = 5/16"	6 = 1/8"	0025 = 25ft	
16 = 3/8"	7 = 5/32"	0050 = 50ft	
		0100 = 100ft	
		0150 = 150ft	



\*Not all size, wall thickness and length combinations available. Contact your local rep to confirm availability.