


off

S0216-TRM (CDS0216-3500-TRM) Tub/Shower Trim

Installation Guide

Model Numbers	Specification	
☐ S0216-TRM Tub/Shower Trim	Tub/Shower Trim with secondary integral diverter shall include metal lever handle. Tub/Shower trim shall be made from metal construction, plated in standard polished chrome finish.	
Warranty		
Limited Lifetime - to the original end purchaser in consumer/residential installations. 5 Years - for industrial/commercial installations. Refer to www.symmons.com/warranty for complete warranty information.	E	

Dimensions

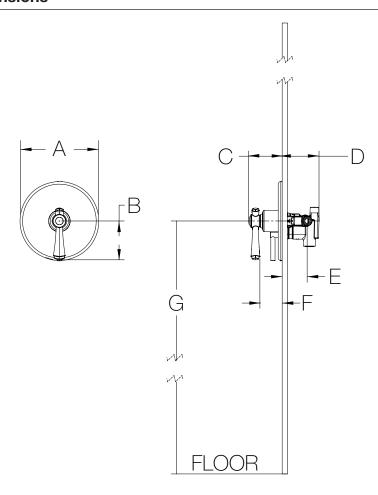


Measurements				
Α	Ø 7-1/2", 191 mm			
В	3-11/16", 94 mm			
С	3-3/16", 81 mm			
D	3-1/2", 89 mm			
Е	(Rough-in)			
	2-3/8" ± 1/2", 60 mm ± 13 mm			
F	2-1/8", 54 mm			
G	Ref. 42", 1067 mm			

Notes:

- 1) All dimensions measured from nominal rough-in (see E as reference).
- 2) Dimensions subject to change without notice.

Parts Breakdown

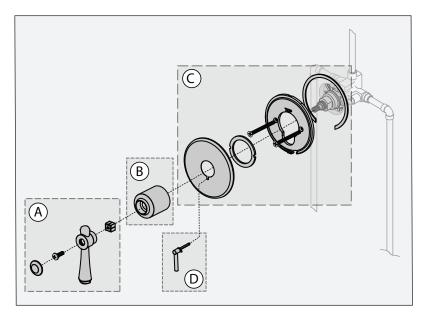

Replacement Parts				
Item	Description		Part Number	
Α	Handle Assembly		T-694	
В	Dome Cover		T-696	
С	Escutcheon		RTS-058	
D	Diverter Handle		FTS-013	
Tools Required for Installation				
	Phillips Head Screwdriver			
Si	licone	C		

Notes:

- 1) Apply a bead of silicone around the perimeter of all shower trim installed flush to the finished wall (less mounting plates and brackets). Leave opening on bottom of escutcheon for weep hole.
- 2) Apply plumber tape to all threaded connections.

MARNING: This product can expose you to chemicals including lead, which is known to the state of California to cause cancer, birth defects, or other reproductive harm. For more information, go to www.P65Warnings.ca.gov.