


ASSEMBLY INSTRUCTIONS

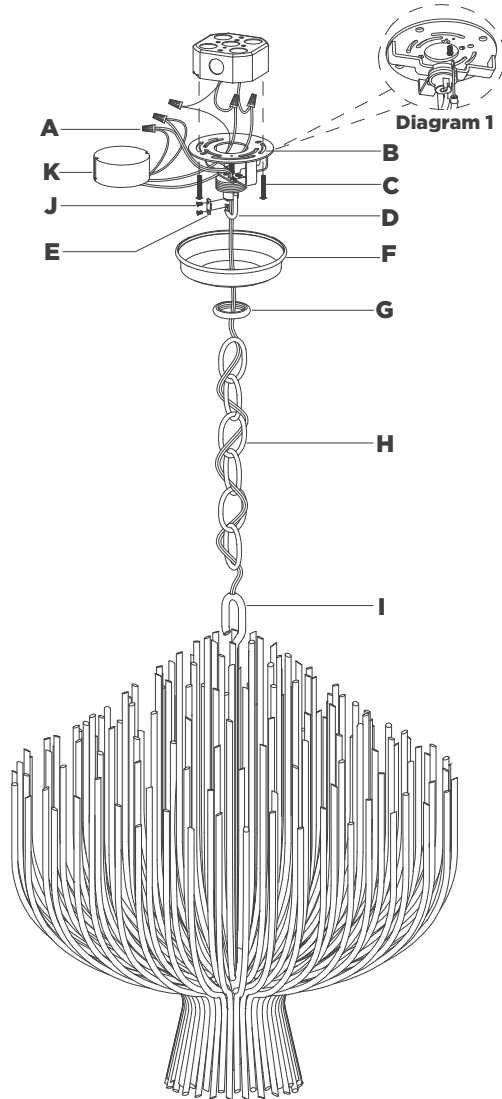

Astra 24" Sculpted Chandelier

Item # CHC5138

NOTICE:


This light fixture should be installed in accordance with all applicable, local installation codes, and by a person familiar with the construction and operation of it, as well as the hazards involved. Inspect item and contents carefully. If any damage or defect is found, do not install. Retain all packaging material until installation is complete and approved.

TOOLS REQUIRED (NOT INCLUDED):

Phillips Screwdriver	Slotted Screwdriver	Wire Strippers
Slip Joint Pliers	Measuring Tape	Chain Pliers
Wire Cutters		

1. Carefully remove all parts from the box. Place on a clean, soft surface.
2. Remove mounting plate **(B)** from canopy **(F)** by removing collar ring **(G)**.
3. Install mounting plate **(B)** to the junction box and secure with mounting screws **(C)**.
4. Install canopy **(F)** to collar loop **(D)** and secure with collar ring **(G)**.
5. Determine desired overall length, and amount of chain **(H)** needed. Shorten chain using chain pliers. (Keep extra chain)
6. Remove link **(E)** from collar loop **(D)** by removing screws **(J)**, then attach chain **(H)** to collar loop **(D)** and to fixture loop **(I)**. Then secure link **(E)** by securing screws **(J)**.
7. Thread fixture wire through chain **(H)**.
NOTE: When you reach the collar loop **(D)**, ensure there is no tension on the wires. Cut excess wires, being sure to leave enough to reach the junction box.
8. Separate two sides of molded wire, and strip insulation on each 5/8".
9. Loosen collar ring **(G)** and let canopy **(F)** slip down chain **(H)** carefully.

ASSEMBLY INSTRUCTIONS

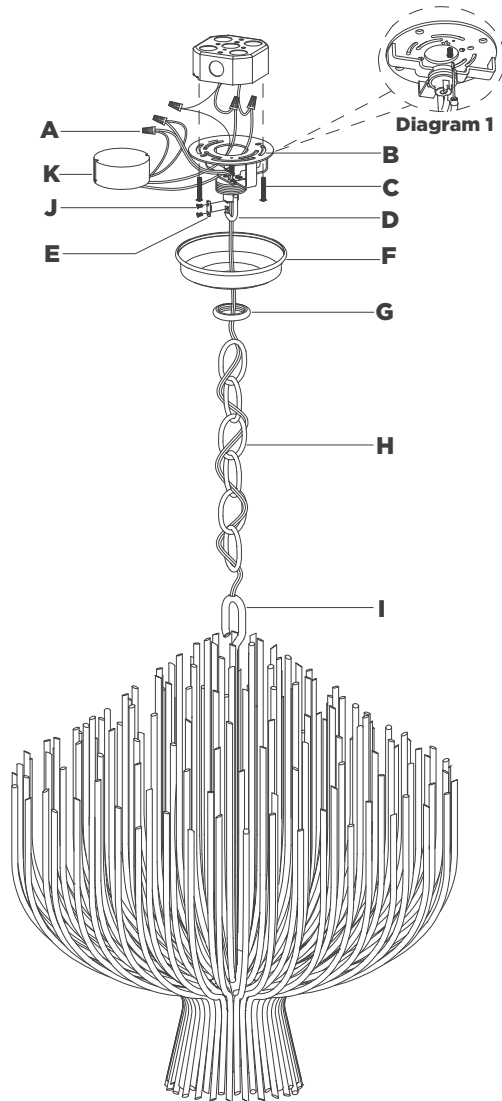

Astra 24" Sculpted Chandelier

Item # CHC5138

NOTICE:

This light fixture should be installed in accordance with all applicable, local installation codes, and by a person familiar with the construction and operation of it, as well as the hazards involved. Inspect item and contents carefully. If any damage or defect is found, do not install. Retain all packaging material until installation is complete and approved.

10. Twist all fixture wires together, and slip through center hole of collar loop **(D)**.

NOTE: Untwist wires and separate to prepare for connection.

11. Connect fixture neutral wire (ribbed) to driver **(K)** output wire (black) using wire nut **(N)**.
12. Connect fixture hot wire (smooth with markings) to driver **(K)** output wire (red) using wire nut **(N)**.
13. Connect supply ground wire (usually green or bare copper) around the green grounding screw (see diagram 1). Tighten.
14. Connect driver **(K)** input neutral wire (white) to the supply neutral wire (usually white) using wire nut **(A)**.
15. Connect driver **(K)** input hot wire (black) to the supply hot wire (usually black) using wire nut **(A)**.

CAUTION: Do not reverse the hot and neutral connections.

16. Make sure all wire connections are tight, then carefully tuck into the junction box.
17. Insert driver **(K)** into the mounting plate **(B)** bracket.
18. Install canopy **(F)** to collar loop **(D)** and secure with collar ring **(G)**.

CARE INSTRUCTIONS: Clean only with a soft dry cloth or feather duster. Do not use abrasive or chemical agents.