

ASSEMBLY INSTRUCTIONS

Bellamy 2 Light Statement Chain 16" Globe Chandelier Item # MF5412


NOTICE:

This light fixture should be installed in accordance with all applicable, local installation codes, and by a person familiar with the construction and operation of it, as well as the hazards involved. Inspect item and contents carefully. If any damage or defect is found, do not install. Retain all packaging material until installation is complete and approved.

TOOLS REQUIRED (NOT INCLUDED):

Phillips Screwdriver	Slotted Screwdriver	Wire Strippers
Slip Joint Pliers	Measuring Tape	Chain Pliers
Wire Cutters	Drill	Hammer
Pencil		

1. Carefully remove all parts from the box. Place on a clean, soft surface.
2. Remove collar ring **(G)** from collar loop **(D)** by unscrewing.
3. Install mounting plate **(B)** to junction box and secure with mounting screws **(C)**.
4. Install canopy **(F)** to collar loop **(D)** and secure with collar ring **(G)**.
5. Using metal plate **(Q)** as a guide, line up with the junction box and mark anchor positions.
6. Using a drill bit slightly smaller than the anchor, drill holes in the marked positions. Install anchors **(P)** into the holes using a hammer.
7. Install metal plate **(Q)** to ceiling and secure with wood screws **(R)** to anchors **(P)**.
8. Place collar loop **(D1)** to canopy **(F1)**, then thread canopy **(F1)** to metal plate **(Q)**.
9. Determine desired overall length, and amount of chains **(H & H1 & H2)** needed. Shorten chains by removing screws **(S)** using provided screwdriver **(T)** (see diagram 1). (Keep extra chain)
10. Place metal covers **(L & L1)** on top of fixtures **(M)**.

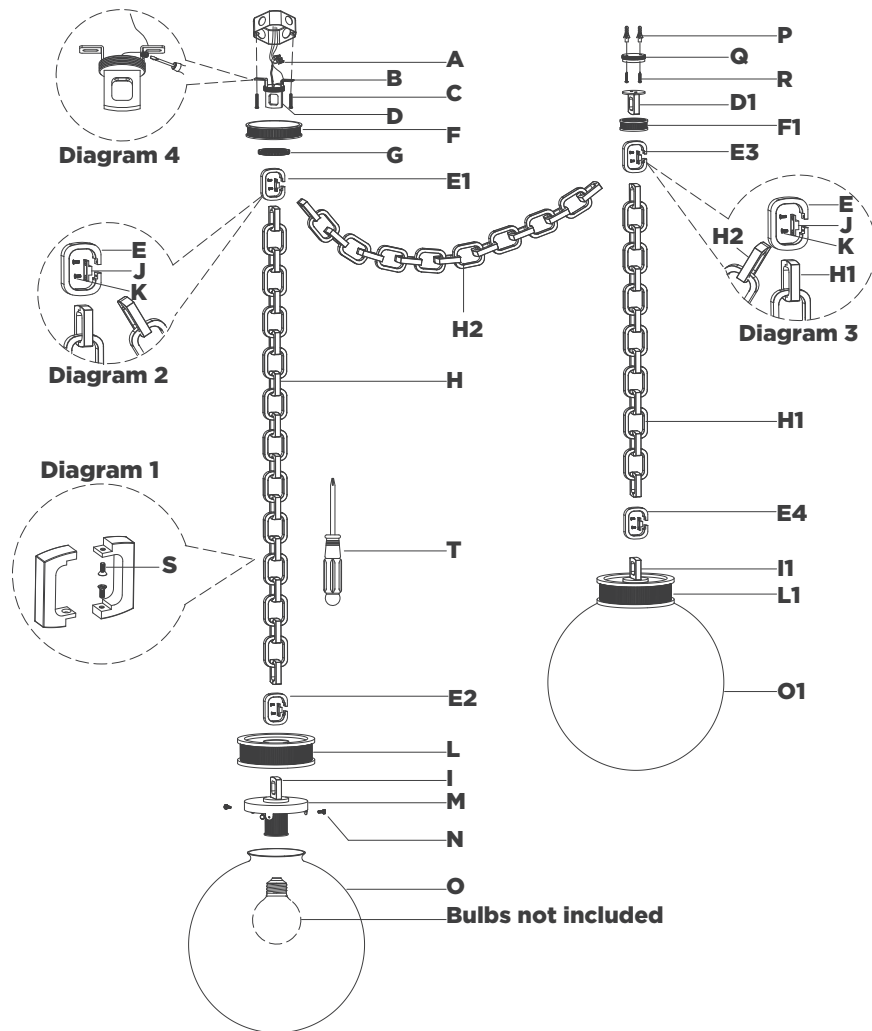

ASSEMBLY INSTRUCTIONS

Bellamy 2 Light Statement Chain 16" Globe Chandelier Item # MF5412

NOTICE:

This light fixture should be installed in accordance with all applicable, local installation codes, and by a person familiar with the construction and operation of it, as well as the hazards involved. Inspect item and contents carefully. If any damage or defect is found, do not install. Retain all packaging material until installation is complete and approved.

18. Connect fixture hot wires (smooth with markings) to the supply hot wire (usually black) using wire nut **(A)**.
CAUTION: Do not reverse the hot and neutral connections.
19. Make sure all wire connections are tight, then carefully tuck into the junction box.
20. Install canopy **(F)** to collar loop **(D)** and secure with collar ring **(G)**.
21. Install light bulbs into the sockets.
22. Remove thumbscrews **(N)** from fixtures **(M)**, then install shades **(O & O1)** to fixtures **(M)** and secure with thumbscrews **(N)**.
NOTE: Do not overtighten otherwise glass shade could be damaged.

CARE INSTRUCTIONS: Clean only with a soft dry cloth or feather duster. Do not use abrasive or chemical agents.

